



# Demand Signal Generator Module for DIN Rail Mounting

**EHD-DSG-201-A-10**

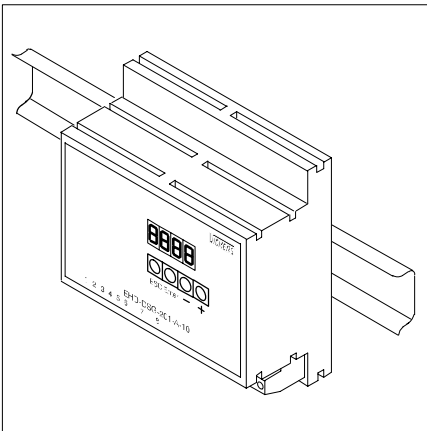

## Front Panel

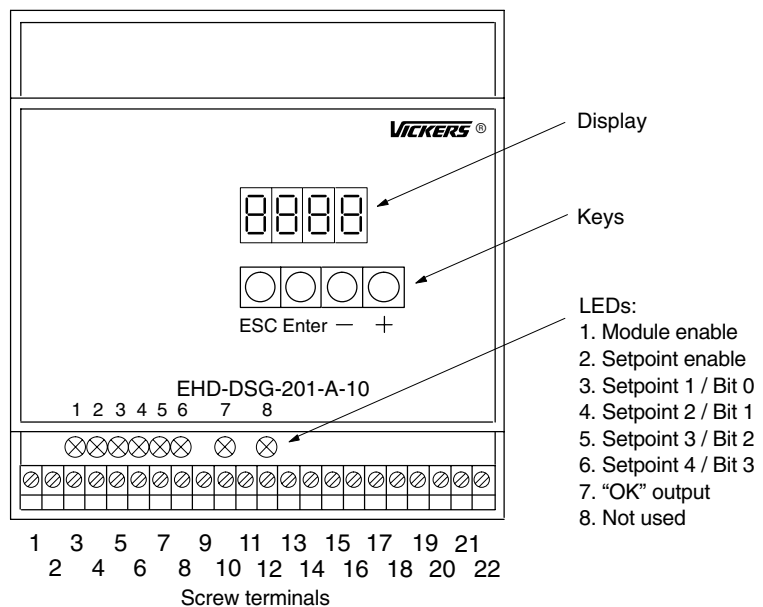

## General Description

This unit is one of a range of "snap-on" control modules designed for cabinet mounting on rails to DIN EN 50022 or DIN EN 50035. The range is ideally suited for use in control systems using Vickers "KA" or "KB" series proportional valves with integral amplifiers or Vickers "UNIPLUG" series, where external signal, deadband compensation and ramp generation may be required.

The Demand Signal Generator module has a built-in microprocessor which controls all of the facilities offered by the unit. Setting up the various control parameters is done via four input keys

mounted on the front panel. All settings are stored in an on-board EEPROM and once entered are retained, until reset, even when the power is switched off. Visual indication of all settings is provided by four 7-segment LED displays mounted on the front panel.

Up to 16 separate setpoints can be externally selected using four input connections in binary code. Setpoints 1 and 2 are scalable using 0-10 volt analog inputs. Unit operating status is indicated by seven separate LEDs. The unit also accepts a  $\pm 10$  volt feedback signal which is compared internally to the command signal and an "in range" signal is generated when they coincide.

## Features and Benefits

- Snap-on mounting to DIN rails
- 24V DC power supply with wide tolerance
- Standard  $\pm 10$ V DC output signal
- Screw terminals simplify installation
- 16 selectable output levels
- Keypad on front panel
- 4 x 7-segment LED display
- 4-quadrant ramps
- Ramp times up to 99,99 seconds
- Can replace previous design




*This product has been designed and tested to meet specific standards outlined in the European Electromagnetic Compatibility Directive (EMC) 89/336/EEC, amended by 91/263/EEC, 92/31/EEC and 93/68/EEC, article 5. For instructions on installation requirements to achieve effective protection levels, see this leaflet and the Installation Wiring Practices for Vickers Electronic Products leaflet 2468. Wiring practices relevant to this Directive are indicated by Electromagnetic Compatibility (EMC).*

# Operating Data

Power supply: Power supply (input) [2] Range Power ground [1] Control supply (output) [18]	24V DC nominal x 6W 18-36V DC (including $\pm 10\%$ pk-to-pk ripple)  +10V DC x 10 mA Temperature drift $< 1 \text{ mV}/^\circ\text{C}$ thru 0-50°C ( $< 0.5 \text{ mV}/^\circ\text{F}$ thru 32-122°F)
Switched input signals (monitored by green LEDs): Enable module [3] Setpoint enable [4] Setpoint 1/Bit 0 [5] Setpoint 2/Bit 1 [6] Setpoint 3/Bit 2 [7] Setpoint 4/Bit 3 [8] Enable voltage Disable voltage Input impedance	} 16 possible setpoints in binary mode (4 in DSG mode) } Range of outputs $-99,99$ to $+99,99\%$  17 to 40V 0 to 3,5V 2,7 k $\Omega$
Analog input signals: Control voltage for setpoint 1 [19] Ground [20] Control voltage for setpoint 2 [21] Ground [22] Feedback voltage from valve [16] Input impedance	0 to +10V  0 to +10V  $\pm 10\text{V}$ 1 M $\Omega$
Switched output: Valve OK signal [10]  Valve has reached setpoint Valve has not reached setpoint Ground [11] Not used [12] Ground [13] Maximum load current (short circuit protected) Analog output: Drive voltage to valve [14] Ground [15]	Valve is following input signal correctly (Valve output polarity = command polarity or Valve within set deadband = command at null) V supply $-2\text{V}$ $< 3\text{V}$  $< 100 \text{ mA}$  $\pm 10\text{V} \times 5 \text{ mA}$ Temperature drift $< 1 \text{ mV}/^\circ\text{C}$ thru 0-50°C ( $< 0.5 \text{ mV}/^\circ\text{F}$ thru 32-122°F)
Set-up adjustments (using four keys and 7-segment display on front panel): Setpoints 4-quadrant ramps 2 deadbands	$-99,9$ to $+99,9 \%$ (represents $-10\text{V}$ to $+10\text{V}$ output voltage) 10 ms to 99,99s 0 to 100%
Operating modes: 16 binary inputs for normal operation 4 inputs simulating previous design Setpoint 1 scalable Setpoint 2 scalable Ramp enable Module enable Feedback	BIN DSG ON/OFF ON/OFF ON/OFF ON/OFF ON/OFF


Displayed parameters:		
Power supply voltage	[2]	V
Output voltage	[14]	V
Control voltage for setpoint 1	[19]	%
Control voltage for setpoint 2	[21]	%
Number of active setpoint		1-16
Setpoint value		%
Feedback voltage	[16]	%
Positive deadband		%
Negative deadband		%
Ramp times (4)		Seconds
Connections		Screw clamping terminals
Wiring recommendations, all connections		0,5 to 2,5 mm <sup>2</sup> (22 to 12 AWG)
Protection class		IEC 529 IP 20
Vibration:		
Vickers environmental specification (Class 1 level 2)		IEC 68-2-6
Electromagnetic compatibility (EMC):		
Emission		EN-50081-2
Immunity		EN-50082-2
Ambient temperature ranges:		
Operating		0°C to 50°C (32°F to 122°F)
Storage		-25°C to 85°C (-13°F to 180°F)
Mounting		Rails to DIN EN 50022 or DIN EN 50035
Housing material		Polyamid 6.6
Mass		0,3 kg (0.45 lb)


# Electrical Block Diagram

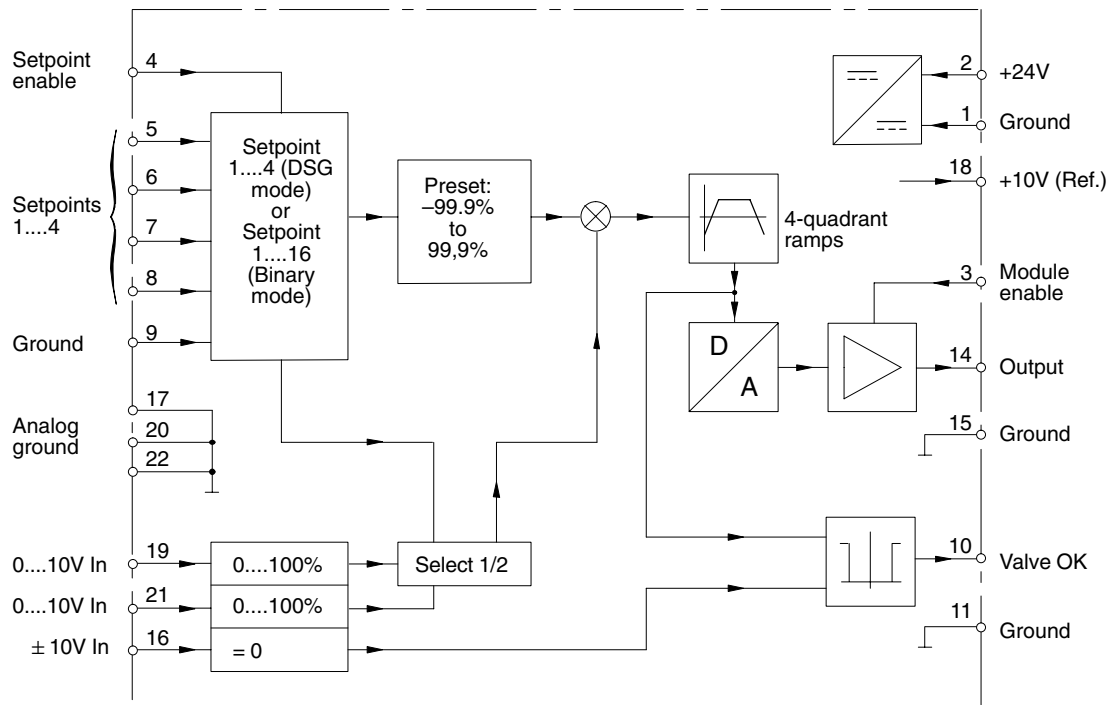

# Typical Connection Arrangement

Customer-generated logic signals select demand levels for valve with integral amplifier

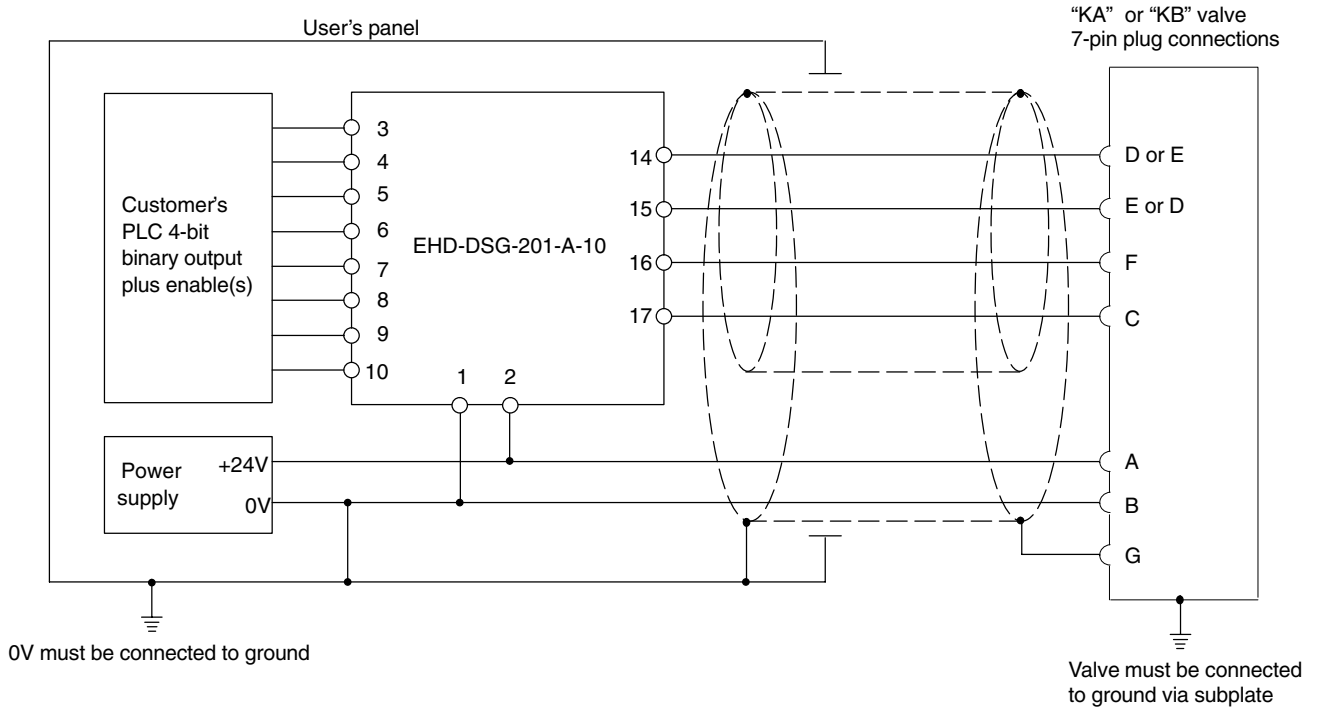

 Customer's protective ground connection.





**Warning:** Electromagnetic Compatibility (EMC)

It is necessary to ensure that the unit is wired up in accordance with the Typical Connection Arrangement shown in this leaflet. For effective protection, the user's electrical cabinet, the valve subplate or manifold and the cable screens should be connected to efficient ground points. The metal 7-pin connector part no. 934939 should be used for the integral amplifier.

In all cases, both valve and cable should be kept as far away as possible from any source of electromagnetic radiation such as cables carrying heavy current, relays and certain kinds of portable radio transmitters, etc. Difficult environments could mean that extra screening may be necessary to avoid the interference.

# Installation Dimensions in mm (inches)

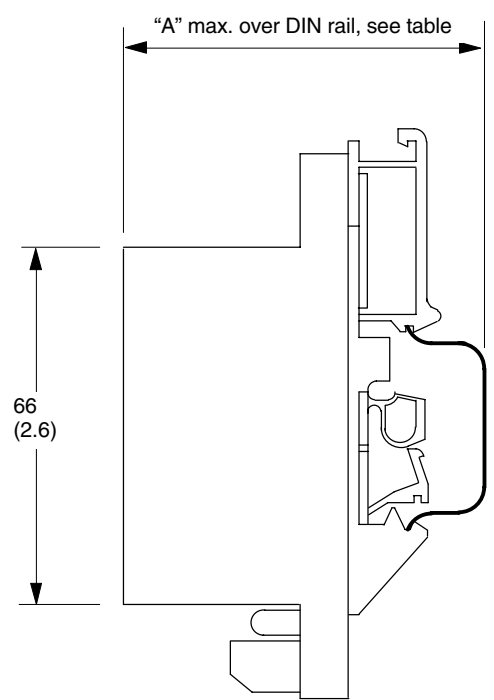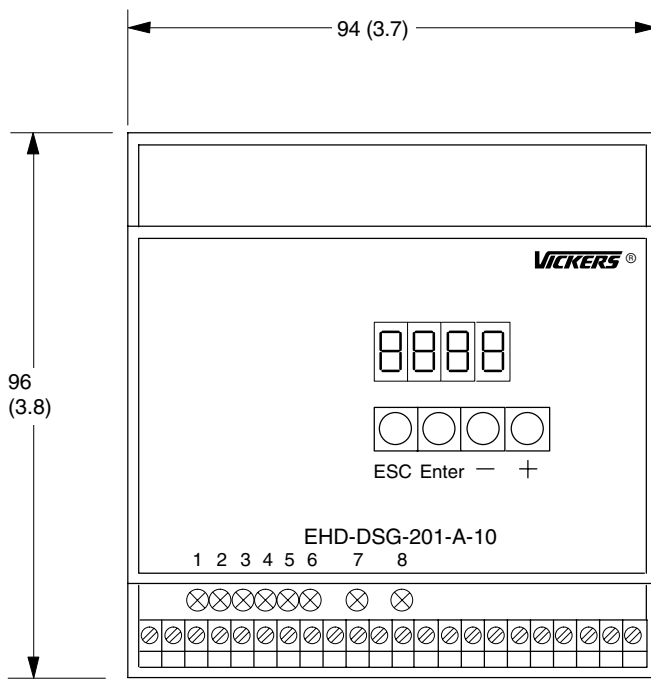

Type	TS1	TS3	TS4/5
A	64,5 (2.6)	60,0 (2.4)	67,5 (2.7)



Vickers Systems Division  
TRINNOVA Ltd  
P.O. Box 4  
New Lane, Havant  
Hampshire PO9 2NB  
England

Trinova do Brazil S.A.  
CEP 07250-270  
Av. Julia Gaioli, 450  
Bonsucesso-Guarulhos  
Sao Paulo 07  
Brazil

Vickers Systems Ltd  
2/F Chiaphua Centre  
Yuen Shun Circuit  
Siu Lek Yuen, Shatin  
N.T. Hong Kong

Vickers, Incorporated  
5445 Corporate Drive  
P.O. Box 302  
Troy, Michigan  
48007-0302  
USA