



Circuit Maker Solutions

Screw-in Cartridge Valve Packages for applications up to 210 bar (3000 psi) and 300 L/min (80 USgpm)



K

Section Contents

Circuit Maker Solutions

Section Overview

Circuit Makers

Model	Typical Application Pressure bar (psi)	Rated Flow L/min (USgpm)	Page
Circuit Maker Solutions - Introduction and Overview			
Full range adjustable pressure compensated flow control package			
FC-1	210 (3000)	Up to 36 (9)	K-4
FC-2	210 (3000)	Up to 57 (15)	K-6
FC-3	210 (3000)	Up to 114 (30)	K-8
FC-4	210 (3000)	Up to 190 (50)	K-10
Full range adjustable pressure compensated flow control package with free reverse flow			
FRC-1	210 (3000)	Up to 36 (9)	K-12
FRC-2	210 (3000)	Up to 57 (15)	K-14
FRC-3	210 (3000)	Up to 114 (30)	K-16
FRC-4	210 (3000)	Up to 190 (50)	K-18
Pump control manifold for single pump circuits			
PCC1-12	210 (3000)	Up to 114 (30)	K-20
PCC1-16	210 (3000)	Up to 228 (60)	K-22
Pump control manifold for multiple pump circuits			
PCC2-12	210 (3000)	Up to 114 (30)	K-24
PCC2-16	210 (3000)	Up to 228 (60)	K-26
Fixed priority flow control with relief on priority flow port			
PFRR-8	210 (3000)	15 (4)	K-28
PFRR-10	210 (3000)	57 (15)	K-30
PFRR-16	210 (3000)	152 (40)	K-32
Solenoid actuated relief valve			
SRV-8	210 (3000)	23 (6)	K-34
SRV-10	210 (3000)	57 (15)	K-36
SRV-12	210 (3000)	114 (30)	K-38
SRV-16	210 (3000)	225 (60)	K-40
SRV-20	210 (3000)	300 (80)	K-42
Cross port relief valve			
CRV-10	210 (3000)	76 (20)	K-44
CRV-16	210 (3000)	300 (80)	K-46
Pressure sensitive regenerative valve package			
RGV-10	210 (3000)	57 (15)	K-48
RGV-12	210 (3000)	114 (30)	K-50
Pressure sensitive regenerative valve package with load locking			
RLV-10	210 (3000)	57 (15)	K-52
RLV-12	210 (3000)	114 (30)	K-54
Cross port relief with shuttle and solenoid vent			
SCR-1	210 (3000)	114 (30)	K-56

What are circuit makers?

Circuit Maker Products are pre-engineered packages. These packages are designed with from 2 to 4 screw-in cartridge valves for generic, repetitive circuit control functions.

All of the products in this catalog are rated at 210 bar (3000 psi) and have either SAE or BSPP port options. Our selection of Circuit Maker pre-engineered packages consists of the following basic units:

- Single and multiple pump control packages
- Solenoid actuated relief valve packages
- Flow control packages
- Cross port relief packages
- Cross port relief with shuttle and solenoid vent
- Pressure sensitive regeneration packages with and without load locking

Typical Applications

Circuit Maker packages can be used in a wide variety of stationary and, on and off highway applications. They are designed to solve a multitude of repeatable, generic application requirements that are encountered in day to day hydraulic circuits. These packages are ideal solutions for specialty machine requirements and low volume options on high volume applications.

Flow control packages -

These packages are used with both fixed and variable pump systems to provide constant output flow for the main or branch circuits. Packages offered provide for maintaining either:

- Cylinder or motor speed; free reverse flow for table positioning, conveyor systems and presses.

Solenoid actuated relief valve packages -

These can be used wherever remote relief or venting control is required for flows up to 300 L/min

Cross port relief valve packages -

These packages are used with bi-directional actuators. The circuit maker provides actuator protection from overload conditions.

Pressure sensitive regeneration packages -

Pressure sensitive regeneration packages provide a means of extending a cylinder as fast as possible without additional pump flow by diverting rod end flow to the head end to accelerate the load. When the pressure in the head end reaches a predetermined level related to the load,

the valve closes off and the cylinder returns to normal speed. Typical applications are for outriggers/stabilizers in mobile markets and machine tool traverse in industrial markets.

Pressure sensitive regeneration packages with load locking -

Pressure sensitive regeneration packages provide a means of extending a cylinder as fast as possible without additional pump flow by diverting rod end flow to the head end to accelerate the load. When the pressure in the head end reaches a predetermined level related to the load,

the valve closes off and the cylinder returns to normal speed. The load locking feature provides stability as the system is now working with an oil column under pressure in addition to the mechanical structure.

Typically used with mobile crane and other similar vehicles to ensure stability when swinging loads. This package has an advantage over alternative systems that use solenoid actuated blocking pins. In the event of a power failure, it is still possible to lower the vehicle/load.

Features and Benefits

- Quick solutions that are ready to use
- Quick delivery at low cost
- Flexibility

Quick solutions:

Circuit Maker packages are pre-engineered packaged solutions for generic, repeatable requirements. They have specific coil voltage, coil connector, flow settings adjustment and pressure setting adjustment options that permit tailoring to application requirements.

Quick delivery/low cost:

Circuit Maker packages have already been engineered to satisfy generic, repetitive circuit needs. There are no scheduling or time related problems, or engineering charges to be recovered.

Flexibility:

Screw-in cartridge valves and housings are sold either separately or as pre-assembled packages. This permits last minute assembly of packages and local tailoring of individual valve options.

Full range adjustable flow control package

Model Code

Description

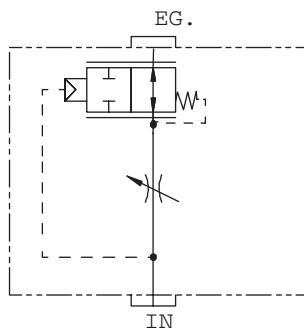
Full range adjustable flow control package

Features

- Pressure compensation
- Full flow range adjustment
- Aluminum in-line type housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

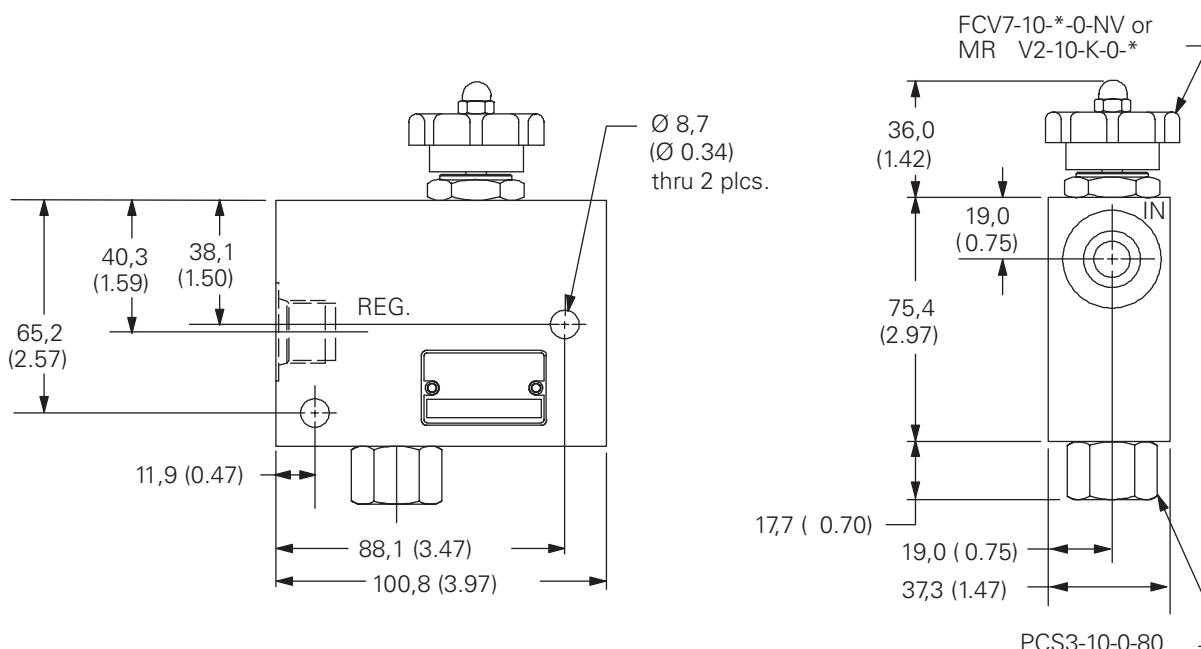
This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required.

Functional Symbol**RATINGS AND SPECIFICATIONS**

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 36 L/min (9 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**[1] Function**

FC - Fully adjustable pressure compensated flow control

[2] Maximum Rated Flow

1 - 34 L/min (9 USgpm)

[3] Seals

Blank - Buna N
V - Viton®

Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
4G	1/2 " BSPP	02-178279
8T	SAE 8	02-178280

[6] Adj. Type

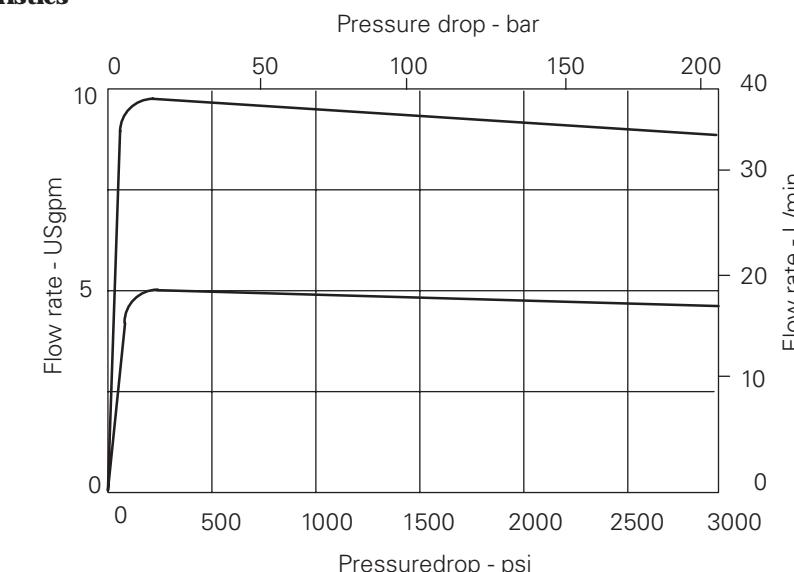
Adj. Type	Flow Rate
K1 - Knob*	19 L/min (5 USgpm)
K2 - Knob	34 L/min (9 USgpm)
S1 - Screw	34 L/min (9 USgpm)
H1 - Handwheel	34 L/min (9 USgpm)
*180° rotation	

[7] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

COMPOSITION CHART

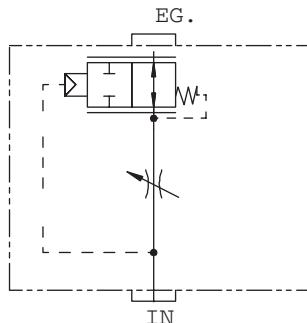
Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	MRV2-10-K-0-05	Flow restrictor, adjustable, semi-rotary spool	19 (5)
K2 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	34 (9)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	34 (9)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	34 (9)
-	PCS3-10-0-80	Pressure compensator, spool type	40 (12)

Performance Characteristics

Full range adjustable flow control package

Description

Full range adjustable flow control package

Functional Symbol**Features**

- Pressure compensation
- Full flow range adjustment
- Aluminum in-line type housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

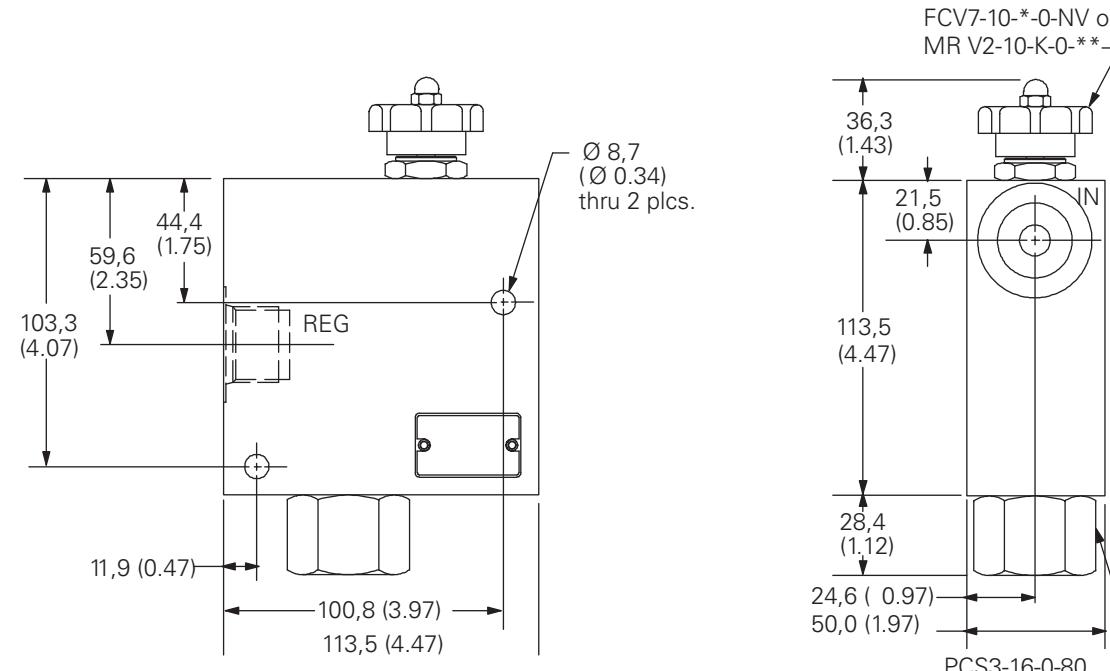
This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 57 L/min (15 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Model Code**

FC - 2 (V) - A ** - ** - 00

[1] Function

FC - Fully adjustable pressure compensated flow control
A - Aluminum

[7] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

[2] Maximum Rated Flow

2 - 57 L/min (15 USgpm)

[3] Seals

Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
6G	3/4 " BSPP	02-178281
12T	SAE 12	02-178282

[6] Adj. Type

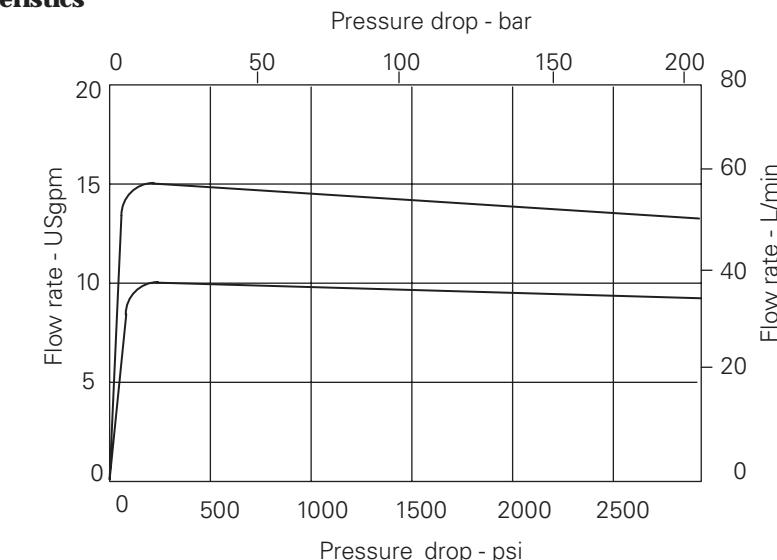
K1 - Knob*
K2 - Knob
S1 - Screw
H1 - Handwheel
*180° rotation

Flow Rate

38 L/min (10 USgpm)
57 L/min (15 USgpm)
57 L/min (15 USgpm)
57 L/min (15 USgpm)

COMPOSITION CHART

Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob 180° rotation only	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	38 (10)
K2 - Knob 180° rotation only	MRV2-10-K-0-15	Flow restrictor, adjustable, semi-rotary spool	57 (15)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	57 (15)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	57 (15)
-	PCS3-16-0-80	Pressure compensator, spool type	114 (30)

Performance Characteristics

Full range adjustable flow control package

Description
Full range adjustable flow control package

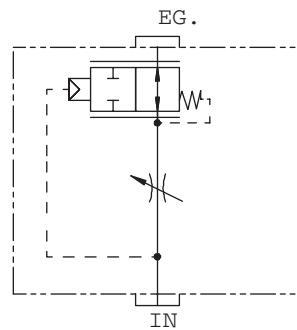
Features

- Pressure compensation
- Full flow range adjustment
- Aluminum in-line type housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required.

Functional Symbol

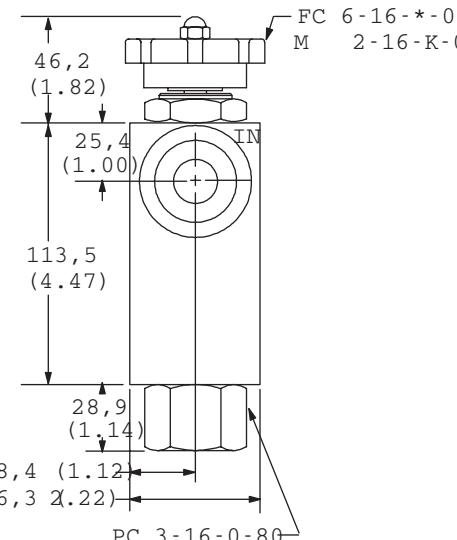
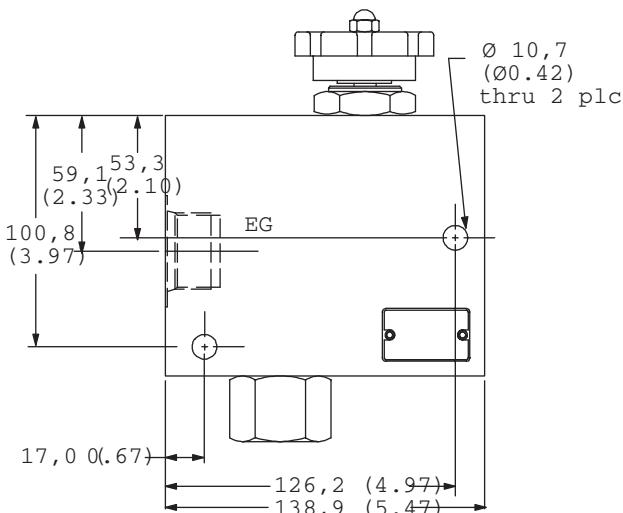


RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 114 L/min (30 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)



FC - 3 (V) - A ** - ** - 00

[1] Function

FC - Fully adjustable pressure compensated flow control

[4] Valve Housing Material

A - Aluminum

[7] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

[2] Maximum Rated Flow

3 - 114 L/min (30 USgpm)

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
8G	1 " BSPP	02-178283
16T	SAE 16	02-178284

[3] Seals

Blank - Buna N
V - Viton®

Viton is a registered trademark of E.I. DuPont

[6] Adj. Type

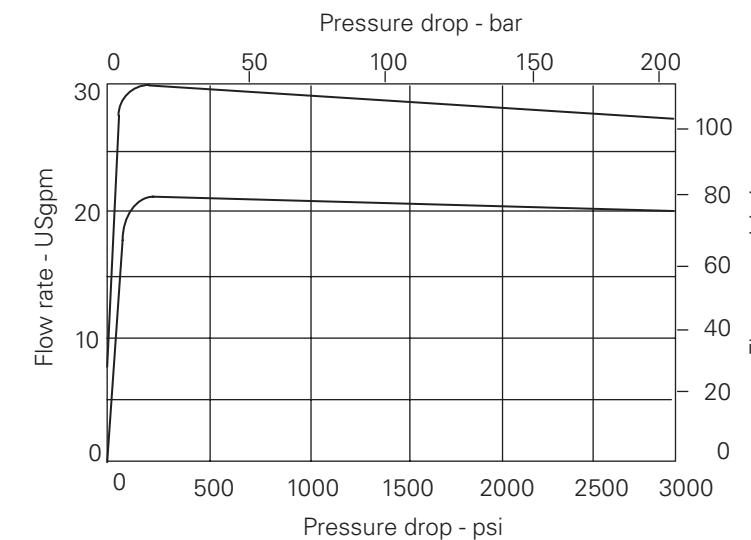
K1 - Knob*	76 L/min (20 USgpm)
K2 - Knob	114 L/min (30 USgpm)
S1 - Screw	114 L/min (30 USgpm)
H1 - Handwheel	114 L/min (30 USgpm)

*180° rotation

COMPOSITION CHART

Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	MRV2-16-K-0-20	Flow restrictor, adjustable, semi-rotary spool	76 (20)
K2 - Knob	MRV2-16-K-0-30	Flow restrictor, adjustable, semi-rotary spool	114 (30)
S1 - Screw	FCV6-16-S-0-NV	Flow restrictor, adjustable	114 (30)
H1 - Hand Knob	FCV6-16-K-0-NV	Flow restrictor, adjustable	114 (30)
-	PCS3-16-0-80	Pressure compensator, spool type	114 (30)

Performance Characteristics



Full range adjustable flow control package

Description

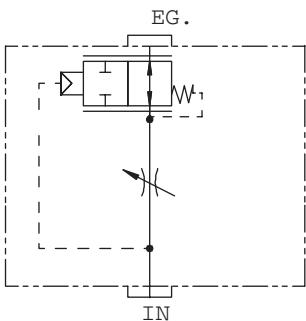
Full range adjustable flow control package

Features

- Pressure compensation
- Full flow range adjustment
- Aluminum in-line type housing
- Knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

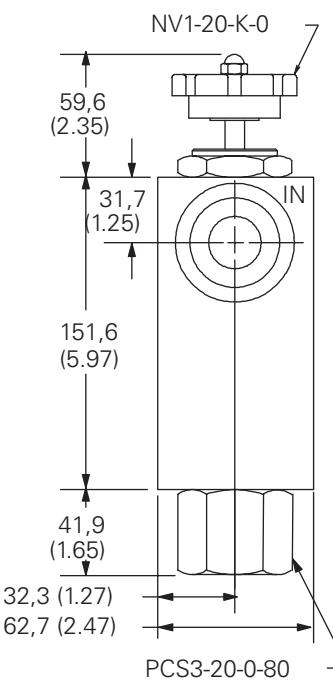
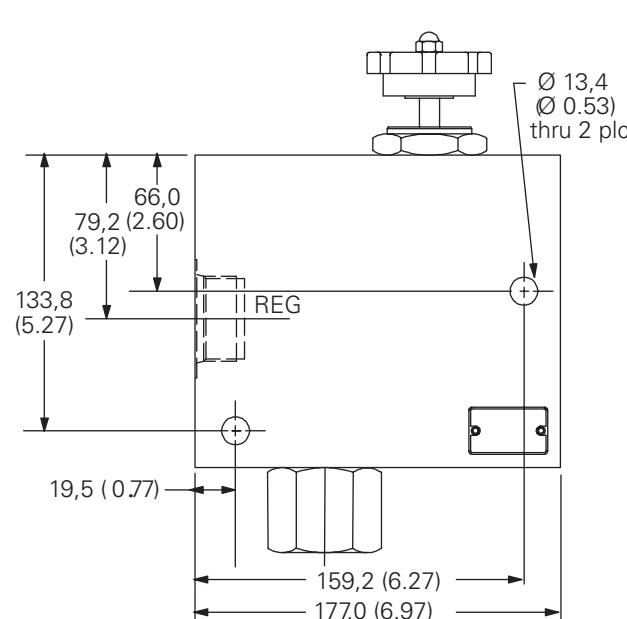
This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required.

Functional Symbol**RATINGS AND SPECIFICATIONS**

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 190 L/min (50 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**[1] Function**

FC - Fully adjustable pressure compensated flow control

[2] Maximum Rated Flow

4 - 190 L/min (50 USgpm)

[3] Seals
Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[5] Port Size

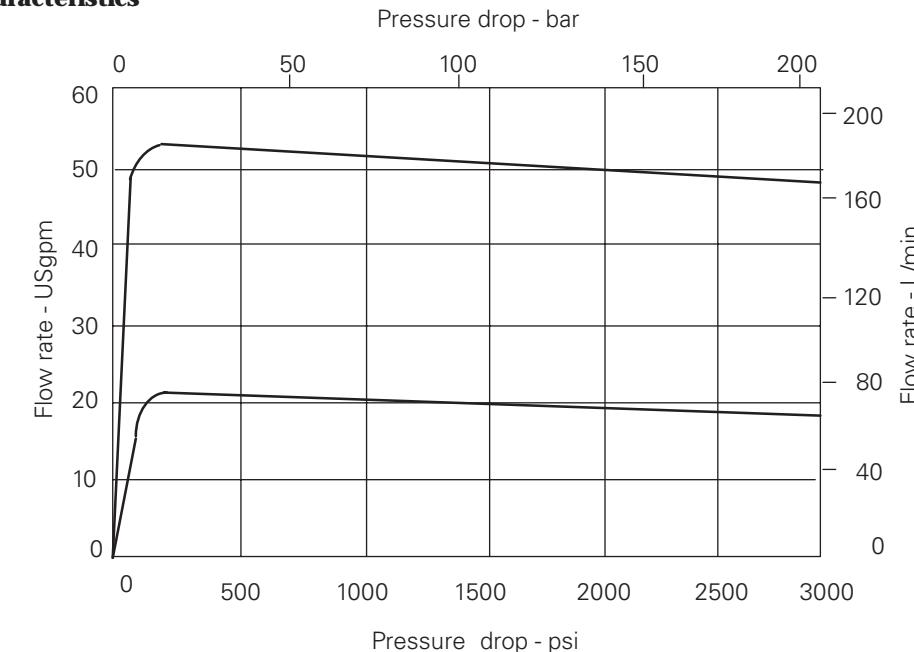
CODE	ALL PORTS	HOUSING NUMBER
12G	1 1/4" BSPP	02-178285
20T	SAE 20	02-178286

[6] Adj. Type

K1 - Knob*
*180° rotation

COMPOSITION CHART

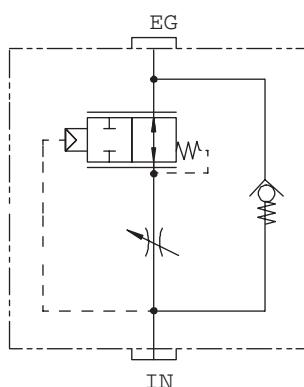
Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	NV1-20-K-0	Needle Valve	190 (50)
-	PCS3-20-0-80	Pressure compensator, spool type	200 (53)

Performance Characteristics

Full range adjustable flow control package with free reverse flow

Description

Full range adjustable flow control package with free reverse flow

Functional Symbol**Features**

- Pressure compensation
- Full flow range adjustment
- Free reverse flow
- Aluminum in-line housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

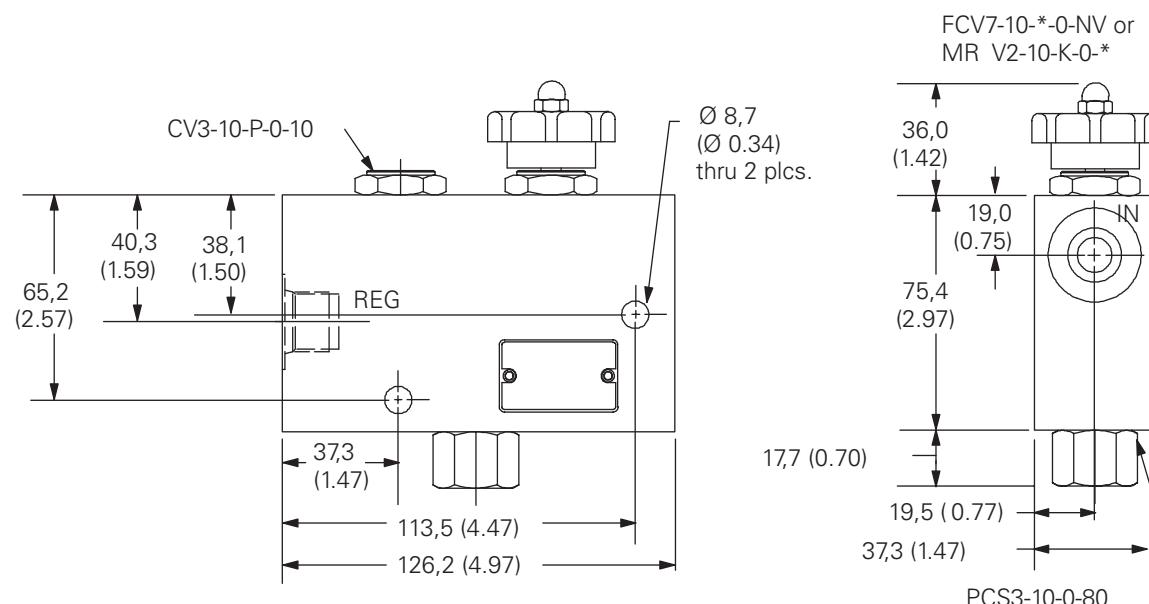
This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required. It also provides free reverse flow.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 36 L/min (9 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Model Code**

FRC - 1 (V) - A ** - ** - 00

[1] Function

FRC - Fully adjustable pressure compensated flow control with reverse flow check

[2] Maximum Rated Flow

1 - 34 L/min (9 USgpm)

[3] Seals

Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[7] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
4G	1/2" BSPP	02-178287
8T	SAE 8	02-178288

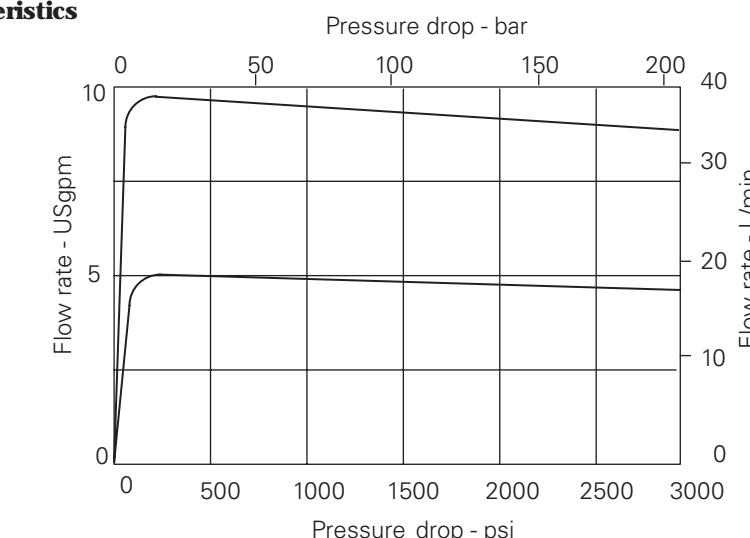
[6] Adj. Type Flow Rate

K1 - Knob*	19 L/min (5 USgpm)
K2 - Knob	34 L/min (9 USgpm)
S1 - Screw	34 L/min (9 USgpm)
H1 - Handwheel	34 L/min (9 USgpm)

*180° rotation

COMPOSITION CHART

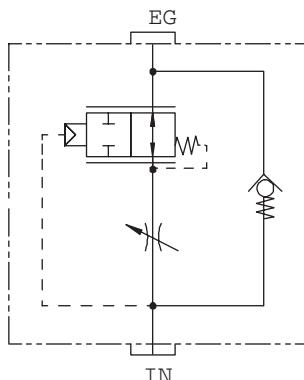
Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	MRV2-10-K-0-05	Flow restrictor, adjustable, semi-rotary spool	19 (5)
K2 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	34 (9)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	34 (9)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	34 (9)
-	CV3-10-P-0-10	Check valve	76 (20)
-	PCS3-10-0-80	Pressure compensator, spool type	40 (12)

Performance Characteristics

Full range adjustable flow control package with free reverse flow

Description

Full range adjustable flow control package with free reverse flow

Functional Symbol**Features**

- Pressure compensation
- Full flow range adjustment
- Free reverse flow
- Aluminum in-line housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

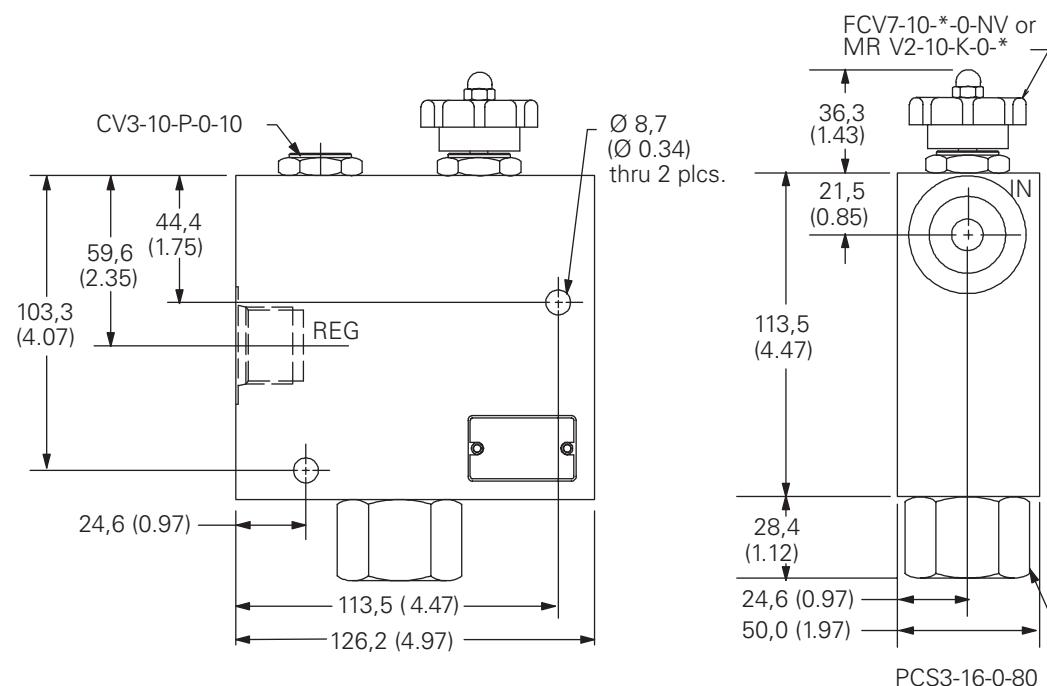
This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required. It also provides free reverse flow.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 57 L/min (15 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Model Code**

FRC - 2 (V) - A ** - ** - 00

[1] Function

FRC - Fully adjustable pressure compensated flow control with reverse flow check

[2] Maximum Rated Flow

2 - 57 L/min (15 USgpm)

[3] Seals

Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
6G	3/4" BSPP	02-178289
12T	SAE 12	02-178290

[6] Adj. Type

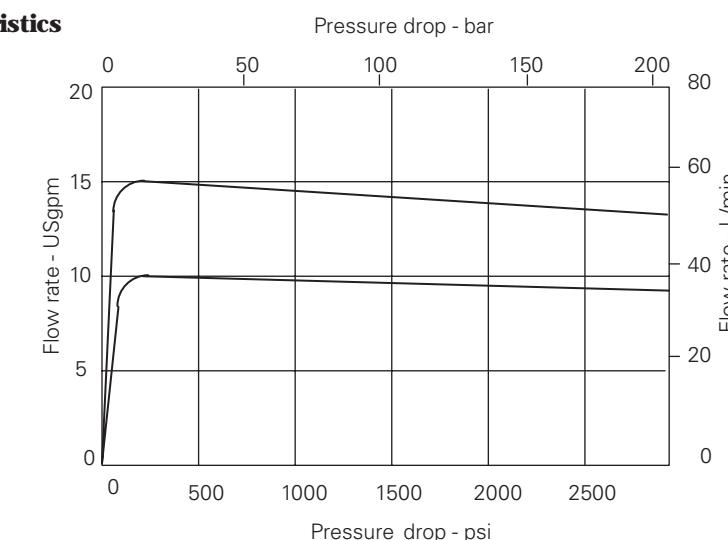
K1 - Knob*
K2 - Knob
S1 - Screw
H1 - Handwheel
*180° rotation

Flow Rate

38 L/min (10 USgpm)
57 L/min (15 USgpm)
57 L/min (15 USgpm)
57 L/min (15 USgpm)
57 L/min (15 USgpm)

COMPOSITION CHART

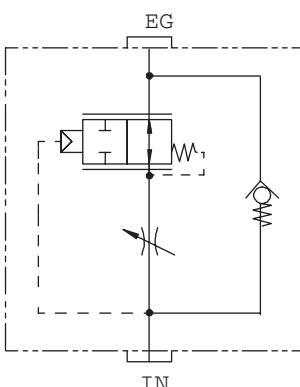
Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	38 (10)
K2 - Knob	MRV2-10-K-0-15	Flow restrictor, adjustable, semi-rotary spool	57 (15)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	57 (15)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	57 (15)
-	CV3-10-P-0-10	Check valve	76 (20)
-	PCS3-16-0-80	Pressure compensator, spool type	114 (30)

Performance Characteristics

Full range adjustable flow control package with free reverse flow

Description

Full range adjustable flow control package with free reverse flow

Functional Symbol**Features**

- Pressure compensation
- Full flow range adjustment
- Free reverse flow
- Aluminum in-line housing
- Screw and knob adjustment options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Application

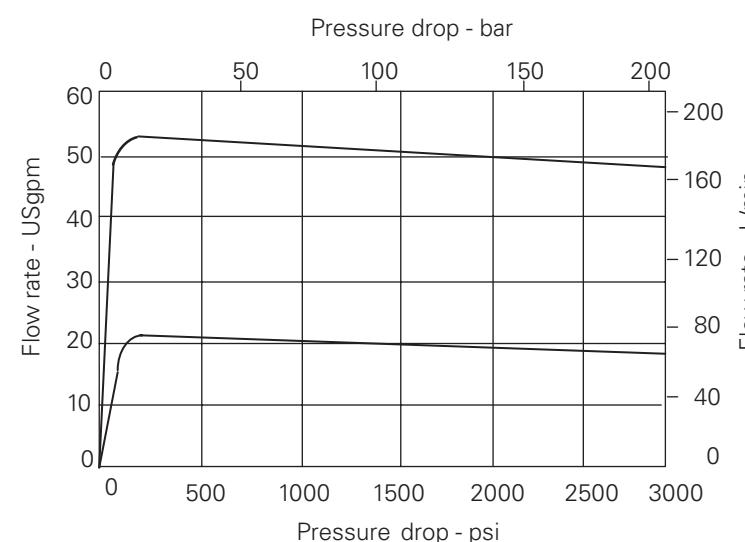
This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure. Also where a full range of flow adjustments is required. It also provides free reverse flow.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Maximum regulated flow	Up to 190 L/min (50 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Model Code**

FRC - 4 (V) - A ** - ** - 00

[1] Function

FRC - Fully adjustable pressure compensated flow control with reverse flow check

[2] Maximum Rated Flow

4 - 190 L/min (50 USgpm)

[3] Seals

Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[4] Valve Housing Material

A - Aluminum

[5] Port Size

CODE	ALL PORTS	HOUSING NUMBER
12G	1 1/4" BSPP	02-178293
20T	SAE 20	02-178294

[6] Adj. Type

K1 - Knob*
*180° rotation

Flow Rate

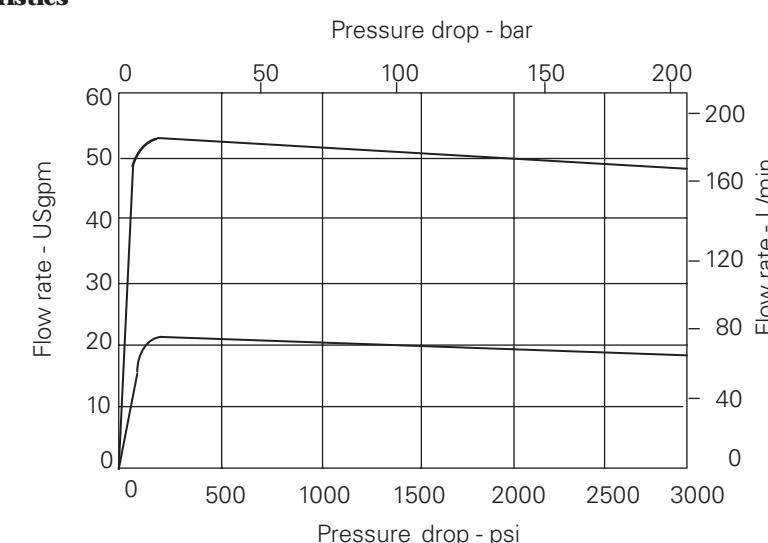
190 L/min (50 USgpm)

[7] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

COMPOSITION CHART

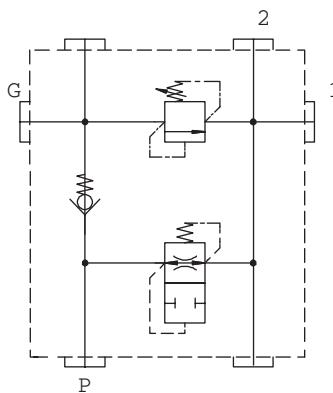
Adjustment	Cartridge	Description	Maximum Flow L/min (USgpm)
K1 - Knob	NV1-20-K-0	Needle valve	190 (50)
-	CV2-20-P-0-5	Check valve	220 (60)
-	PCS3-20-0-80	Pressure compensator, spool type	200 (53)

Performance Characteristics

Pump control manifold for single pump circuits

Description

Pump control manifold for single pump circuits

Functional Symbol**Features**

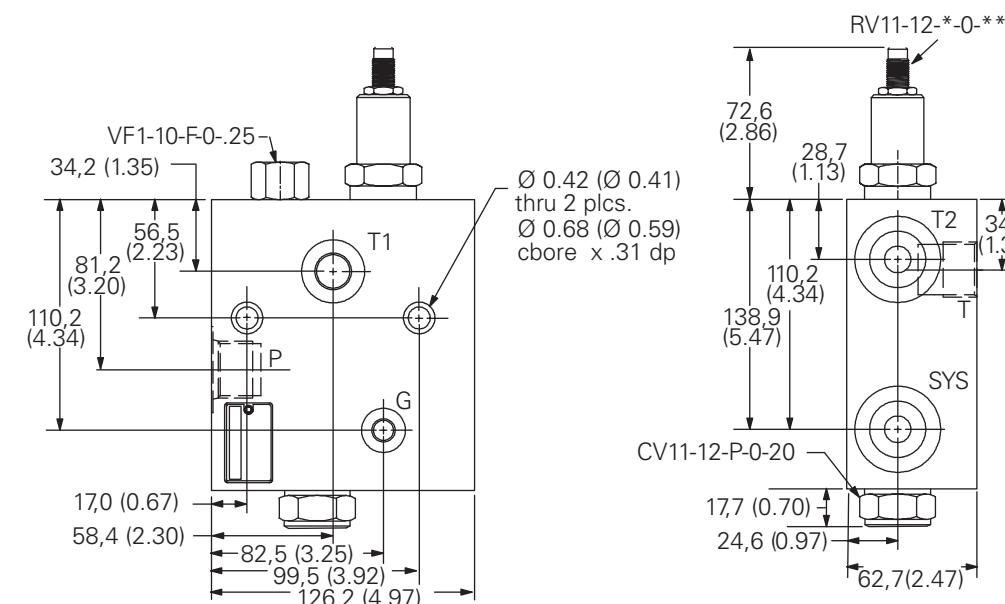
- Multiple tank ports for mounting convenience
- Direct reservoir mounting capability by using "T" port. Both "T" port and mounting holes have o-ring seals mounting surface.
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.
- Aluminum in-line type housing

RATINGS AND SPECIFICATIONS

Typical application pressure range	5 - 210 bar (75 - 3000 psi)
Maximum regulated flow	up to 114 L/min (30 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

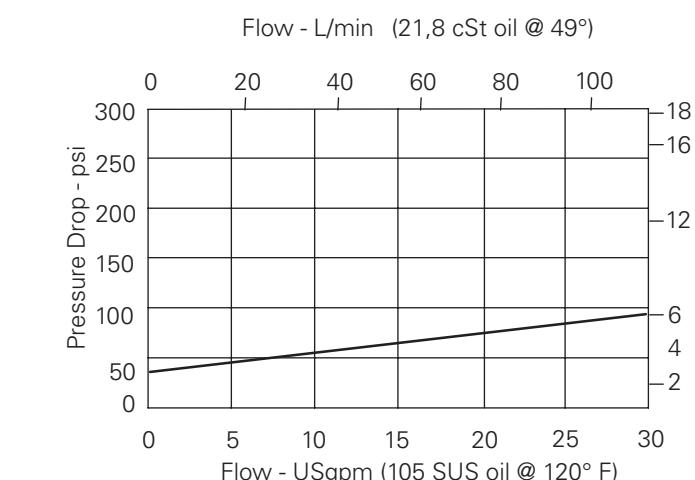
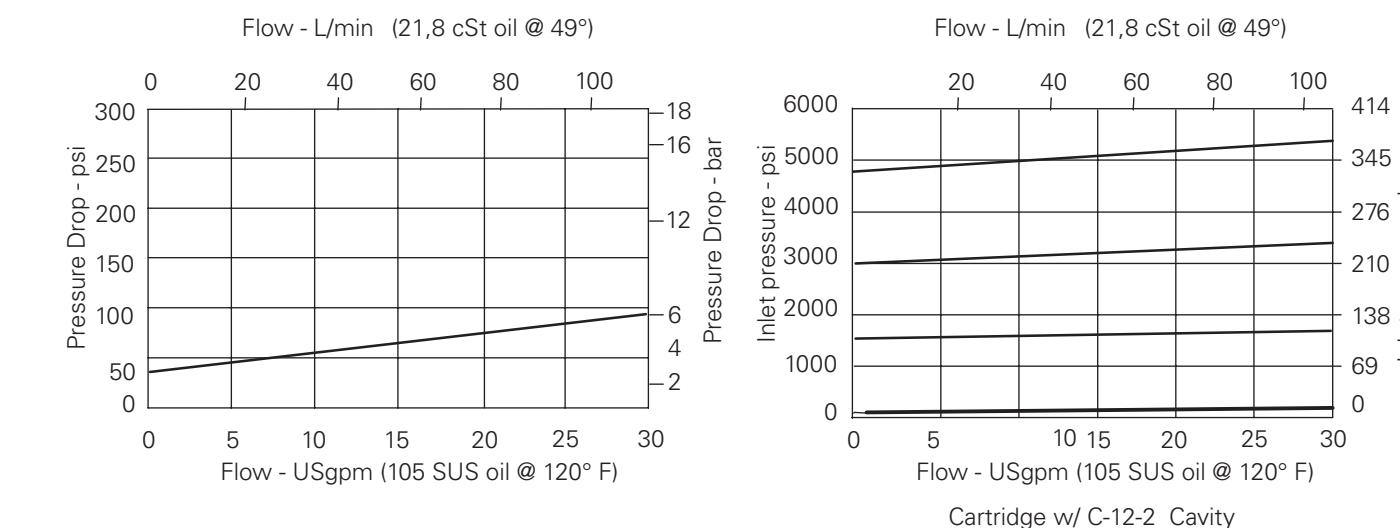


PCC1 - 12 (V) - * - A ** - ** / ** - 00

[1] Function PCC - Pump control for single pump circuits	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 15 - 5 - 100 bar (75-1500psi) 30 - 10 - 210 bar (150-3000psi)	[9] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
[2] Size 12 - 12 size		[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi	
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[5] Valve Housing Material A - Aluminum		
	[6] Port Size		
	CODE P, SYS, T2	T1	GAUGE
	6G	3/4" BSPP	1/2" BSPP
	12T	SAE 12	SAE 8
			SAE 4

COMPOSITION CHART

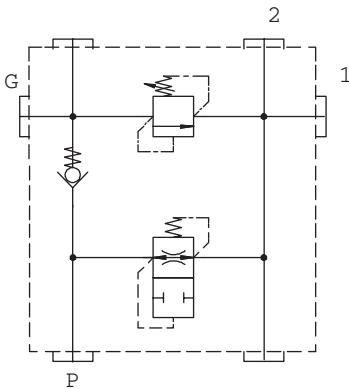
Cartridge	Description	Maximum Flow	Quantity
VF1-10-F-0-25	Velocity fuse	23 L/min (6 USgpm)	1
CV11-12-P-0-20	Check valve	113 L/min (30 USgpm)	1
RV11-12-*-0-**	Relief valve	113 L/min (30 USgpm)	1

Pressure Drop Curve**Pressure Override Curves**

Pump control manifold for single pump circuits

Description

Pump control manifold for single pump circuits

Functional Symbol**Features**

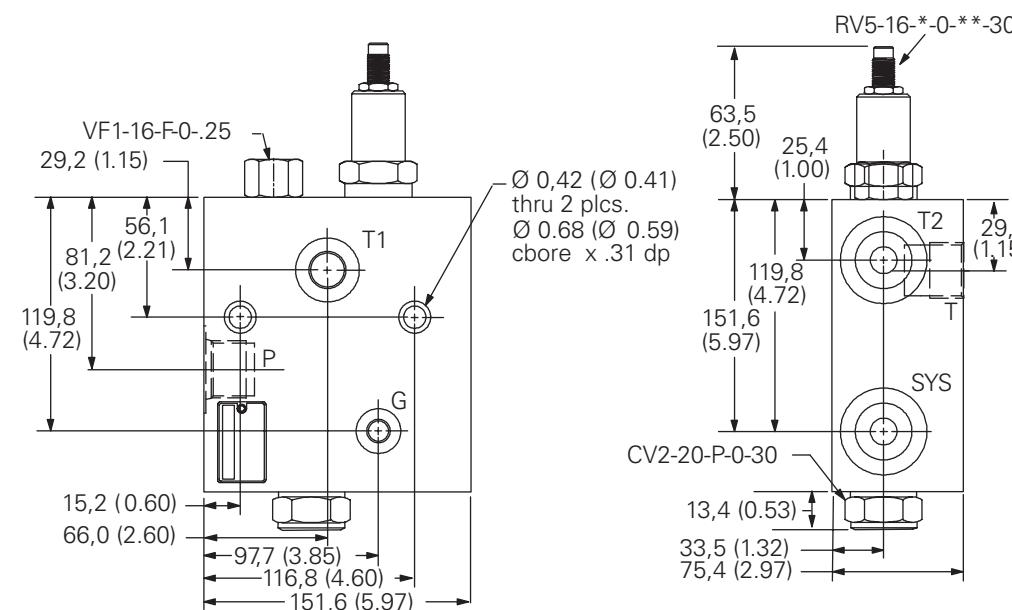
- Multiple tank ports for mounting convenience
- Direct reservoir mounting capability by using "T" port. Both "T" port and mounting holes have o-ring seals mounting surface.
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.
- Aluminum in-line type housing

RATINGS AND SPECIFICATIONS

Typical application pressure range	10 - 210 bar (150 - 3000 psi)
Maximum regulated flow	up to 228 L/min (60 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Application**

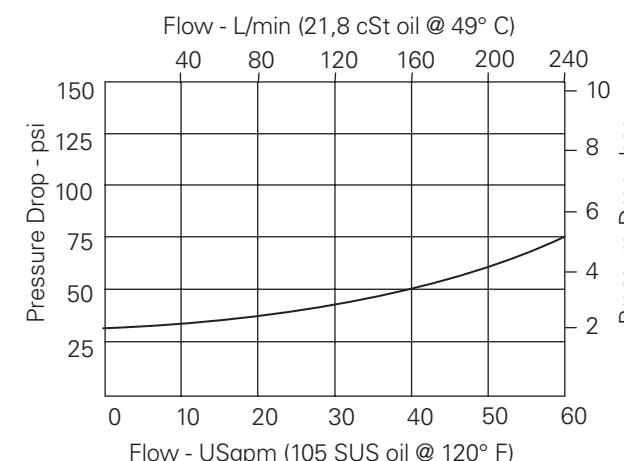
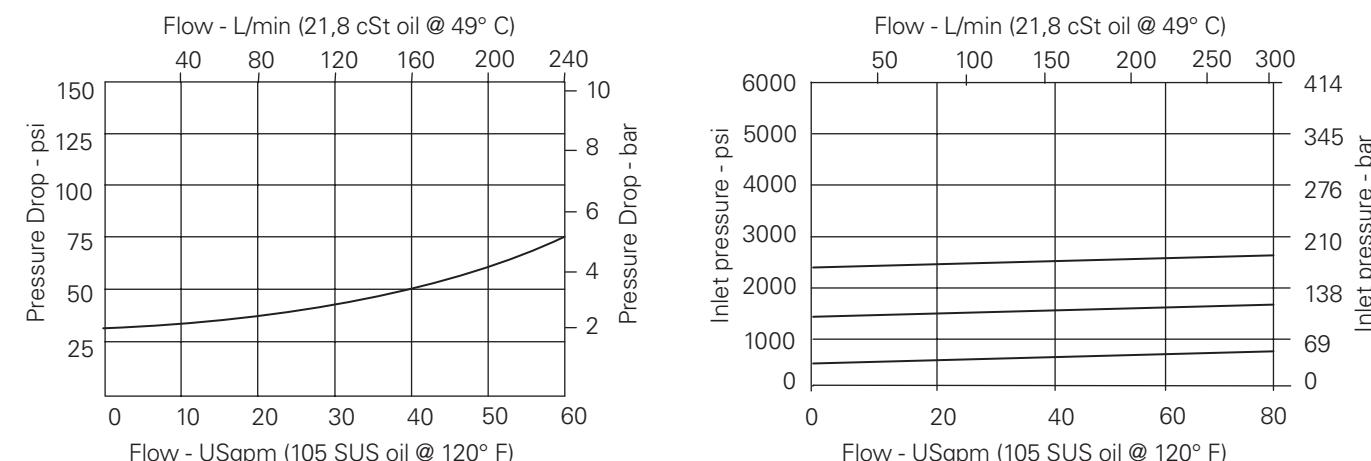
This standard valve package is used for air-bleed and start-up in single pump power units. It also provides main system relief protection.

PCC1 - 16 (V) - * - A ** - ** / ** - 00

[1] Function PCC1 - Pump control for single pump circuits	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 30 - 10 - 210 bar (150-3000psi)	[9] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
[2] Size 16 - 16 size	[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi		
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[5] Valve Housing Material A - Aluminum		
	[6] Port Size CODE P, SYS, T2 T1 GAUGE		
	8G 1" BSPP 3/4" BSPP 1/4" BSPP		
	16T SAE 16 SAE 8 SAE 4		

COMPOSITION CHART

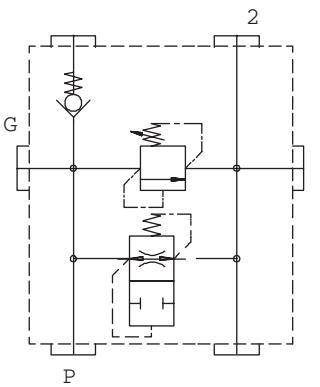
Cartridge	Description	Maximum Flow	Quantity
VF1-10-F-0.25	Velocity fuse	23 L/min (6 USgpm)	1
CV2-20-P-0-30	Check valve	228 L/min (60 USgpm)	1
RV5-16-*0-30	Relief valve	303 L/min (80 USgpm)	1

Pressure Drop Curve**Pressure Override Curves**

Pump control manifold for multiple pump circuits

Description

Pump control manifold for multiple pump circuits

Functional Symbol**Features**

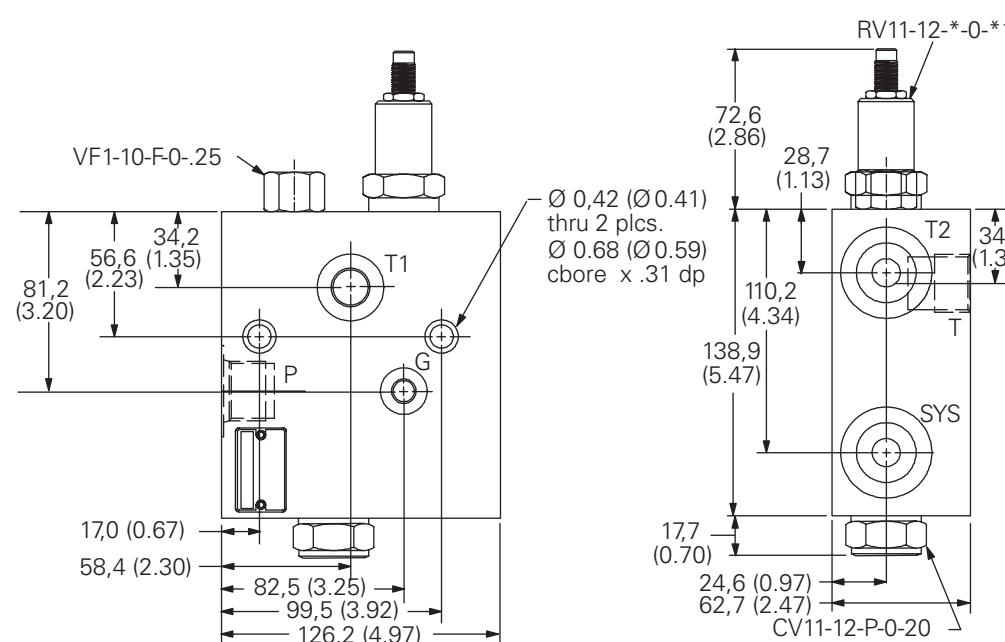
- Individual relief pressure setting for each pump in the system
- Multiple tank ports for mounting convenience
- Gauge port
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.
- Aluminum in-line type housing
- Tamper proof and adjustable relief options
- Direct reservoir mounting capability by using "T" port. Both "T" port and mounting holes have o-ring seals mounting surface.

RATINGS AND SPECIFICATIONS

Typical application pressure range	5 - 210 bar (75 - 3000 psi)
Maximum regulation flow	up to 114 L/min (30 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)



PCC2 - 12 (V) - * - A ** - ** - 00

[1] Function PCC2 - Pump control for single pump circuits	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 15 - 5 - 100 bar (75-1500psi) 30 - 10 - 210 bar (150-3000psi)	[9] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
---	---	---	---

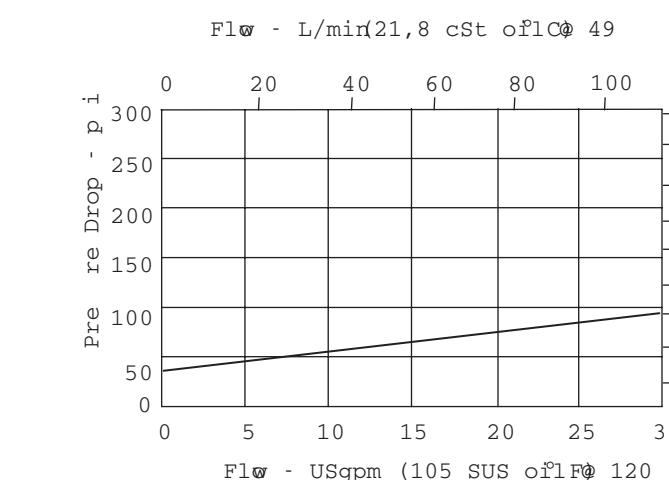
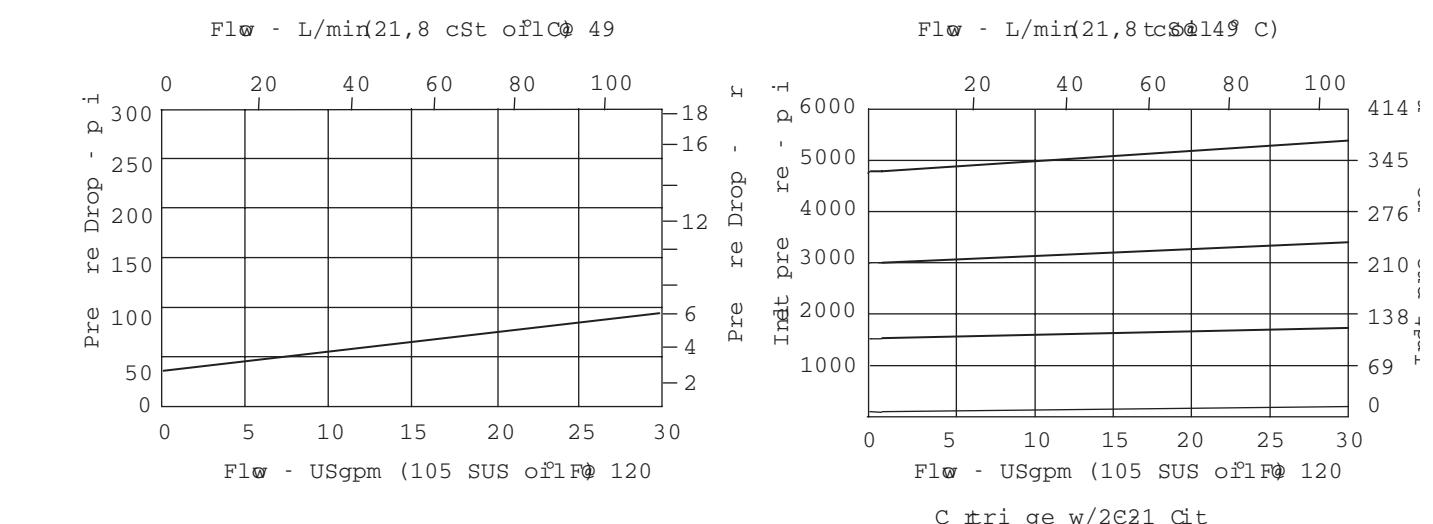
[2] Size 12 - 12 size	[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi
---------------------------------	--

[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[5] Valve Housing Material A - Aluminum
--	---

[6] Port Size	CODE	P, SYS, T2	T1	GAUGE
6G		3/4" BSPP	1/2" BSPP	1/4" BSPP
12T		SAE 12	SAE 8	SAE 4

COMPOSITION CHART

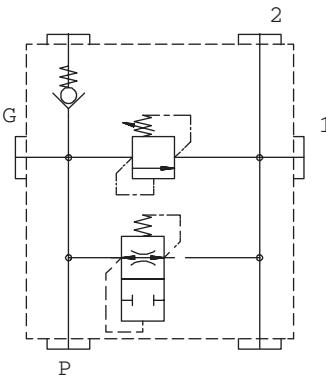
Cartridge	Description	Maximum Flow	Quantity
VF1-10-F-0-25	Velocity fuse	23 L/min (6 USgpm)	1
CV11-12-P-0-20	Check valve	113 L/min (30 USgpm)	1
RV11-12-*-*-*-00	Relief valve	113 L/min (30 USgpm)	1

Pressure Drop Curve**Pressure Override Curves**

Pump control manifold for multiple pump circuits

Description

Pump control manifold for multiple pump circuits

Functional Symbol**Features**

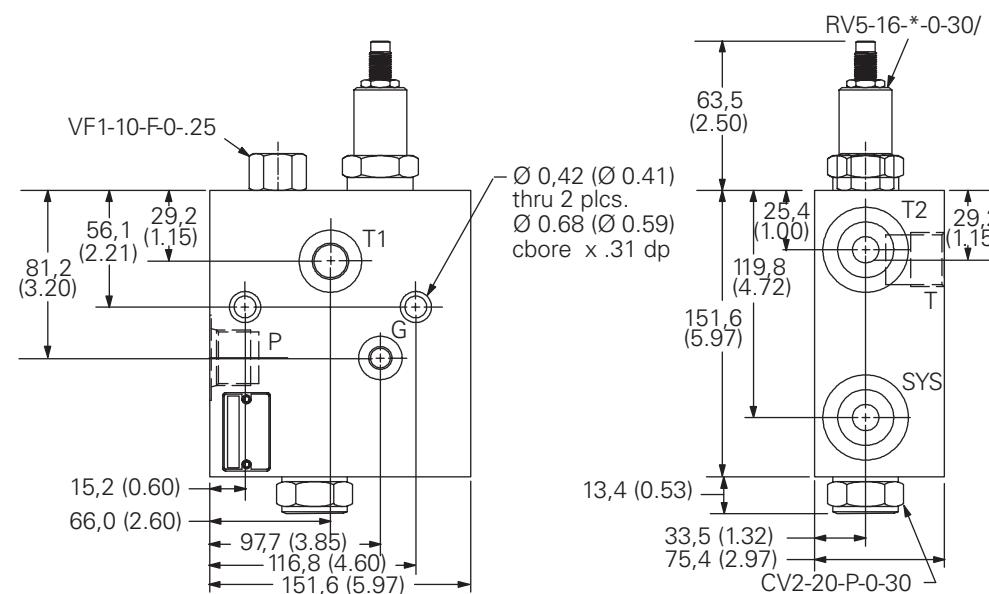
- Individual relief pressure setting for each pump in the system
- Multiple tank ports for mounting convenience
- Gauge port
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

RATINGS AND SPECIFICATIONS

Typical application pressure range	10 - 210 bar (150 - 3000 psi)
Maximum regulated flow	up to 228 L/min (60 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

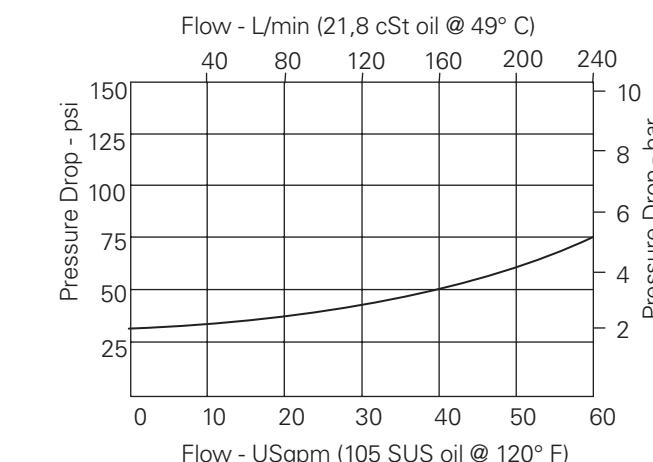
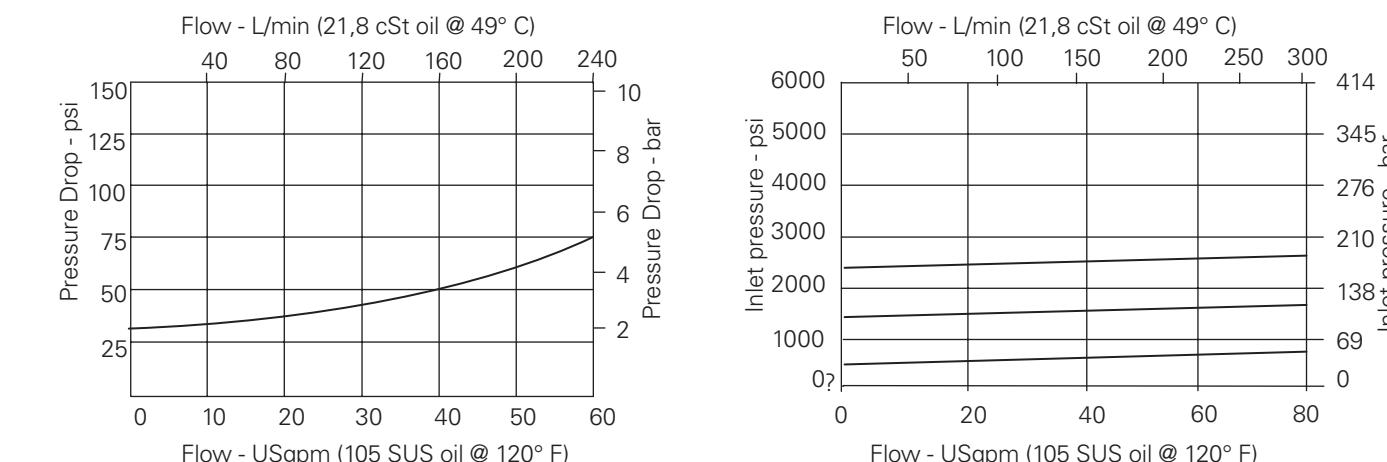


PCC2 - 16 (V) - * - A ** - ** / ** - 00

[1] Function PCC2 - Pump control for single pump circuits	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 30 - 10 - 210 bar (150-3000 psi)	[9] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
[2] Size 16 - 16 size		[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi	
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[5] Valve Housing Material A - Aluminum		
		[6] Port Size	
		CODE P, SYS, T2 T1 GAUGE	
		8G 1" BSPP 3/4" BSPP 1/4" BSPP	
		16T SAE 16 SAE 12 SAE 4	

COMPOSITION CHART

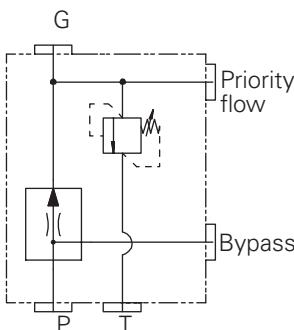
Cartridge	Description	Maximum Flow	Quantity
VF1-10-F-0-25	Velocity fuse	23 L/min (6 USgpm)	1
CV2-20-P-0-30	Check valve	228 L/min (60 USgpm)	1
RV5-16-*0-30/	Relief valve	303 L/min (80 USgpm)	1

Pressure Drop Curve**Pressure Override Curves**

Fixed priority flow control
with relief on priority flow
port

Description

Fixed priority flow control
with relief on priority flow
port

Functional Symbol**Features**

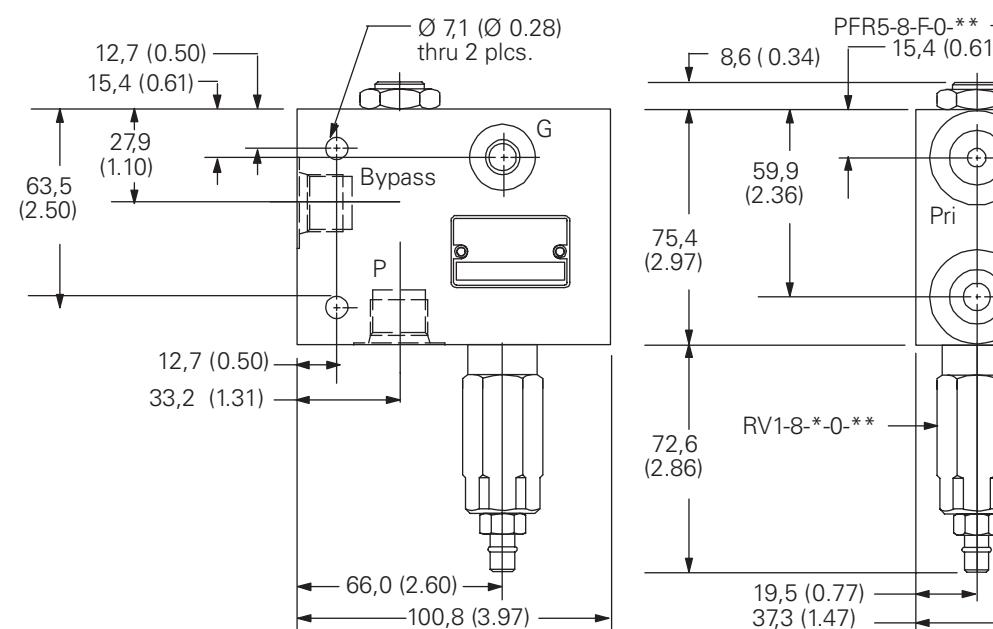
- Priority flow pressure compensation
- All ports except "T" can be pressurized to 210 bar (3000 psi)
- Aluminum in-line type housing
- Tamper proof and adjustable relief options
- Gauge port
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

RATINGS AND SPECIFICATIONS

Typical application pressure range	7 - 210 bar (100 - 3000 psi)
Maximum inlet flow	15 L/min (4 USgpm)
Regulated flow range	0.4 - 8 L/min (0.1 - 2.5 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

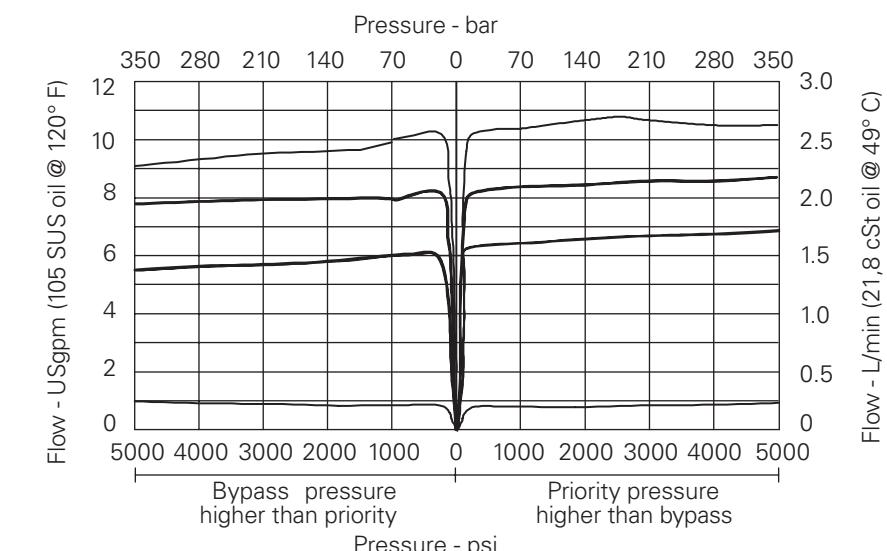
Dimensions

mm (inch)

**Model Code**

PFRR - 8 (V) - * - A ** - ** / ** - ** - 00

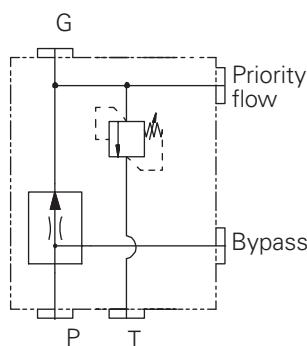
[1] Function PFRR - Pressure compensated priority flow control with relief on priority port	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 3 - 3 - 20 bar (50-300psi) 20 - 40 - 140 bar (600-2000psi) 36 - 20 - 250 bar (300-3600psi)	[9] Flow Setting Customer must specify flow 0,4 - 8 L/min (0.1 - 2.5 USgpm)	
[2] Size 8 - 8 size	[5] Valve Housing Material A - Aluminum	[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi	[10] Special Features 00 - None (Only required if valve has special features, omitted if "00".)	
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[6] Port Size			
	CODE P, BYPASS PRIORITY, T GAUGE	HOUSING NUMBER		
	3G 3/8" BSPP	3/8" BSPP	1/4" BSPP	02-178273
	8T SAE 8	SAE 8	SAE 4	02-178274
COMPOSITION CHART				
Cartridge	Description		Quantity	
PFR5-8-F-0-**	Priority flow regulator		1	
RV1-8-*-0-**	Relief valve		1	

Typical Flow Regulation

Fixed priority flow control
with relief on priority flow
port

Description

Fixed priority flow control
with relief on priority flow
port

Functional Symbol**Features**

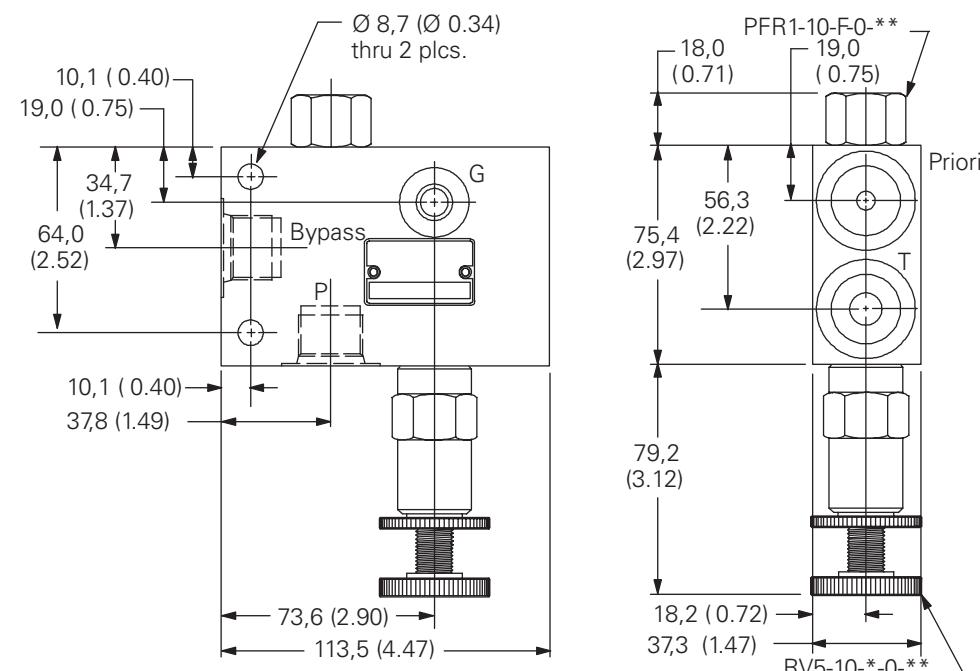
- Priority flow pressure compensation
- All ports except "T" can be pressurized to 210 bar (3000 psi)
- Aluminum in-line type housing
- Tamper proof and adjustable relief options
- Gauge port
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

RATINGS AND SPECIFICATIONS

Typical application pressure range	7 - 210 bar (100 - 3000 psi)
Maximum inlet flow	57 L/min (15 USgpm)
Regulated flow range	0,38 - 22,7 L/min (0.1-6 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

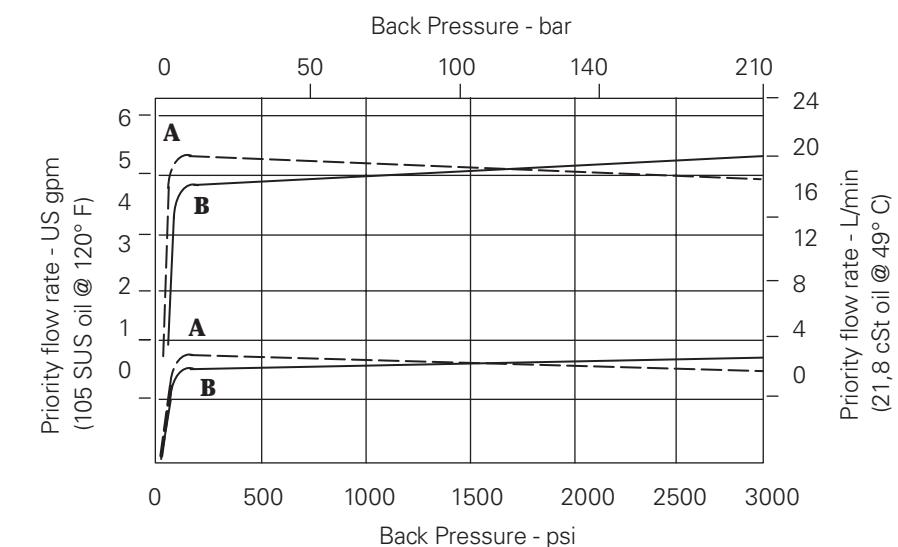
mm (inch)

**Application**

This standard valve package is used to maintain constant flow to priority circuits when input flow is greater than required, regardless of changes in upstream or downstream pressure. It will bypass the rest of the flow to an auxiliary circuit or to tank. Relief valve on a priority port limits pressure on a priority port, as well as ensures bypass flow when there is no demand on priority circuit.

PFRR - 10 (V) - * - A ** - ** / ** - ** - 00

[1] Function PFRR - Pressure compensated priority flow control with relief on priority port	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 3 - 3 - 20 bar (50-300psi) 20 - 7 - 140 bar (100-2000psi) 35 - 17 - 240 bar (250-3500psi)	[9] Flow Setting Customer must specify flow 0.38-22,7 L/min (0.1 - 6 USgpm)
[2] Size 10 - 10 size	[5] Valve Housing Material A - Aluminum	[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi	[10] Special Features 00 - None (Only required if valve has special features, omitted if "00")
[3] Seals Blank - Buna N V - Viton®	[6] Port Size Viton is a registered trademark of E.I. DuPont	CODE P, BYPASS PRIORITY, T GAUGE HOUSING NUMBER	
		4G 3/8" BSPP 1/2" BSPP 1/4" BSPP 02-178275	
		10T SAE 8 SAE 8 SAE 4 02-178276	
COMPOSITION CHART			
Cartridge	Description	Quantity	
PFR1-10-F-0-**	Priority flow regulator	1	
RV5-10-*0-35/	Relief valve	1	

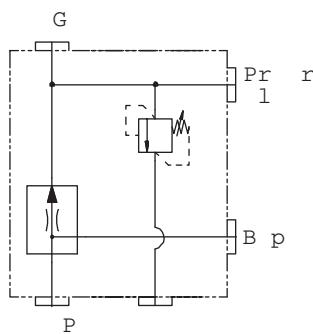
Typical Flow Regulation

A - Port 3, priority (regulated) outlet pressurized
B - Port 2, bypass outlet pressurized

Fixed priority flow control
with relief on priority flow port

Description

Fixed priority flow control
with relief on priority flow port

Functional Symbol**Features**

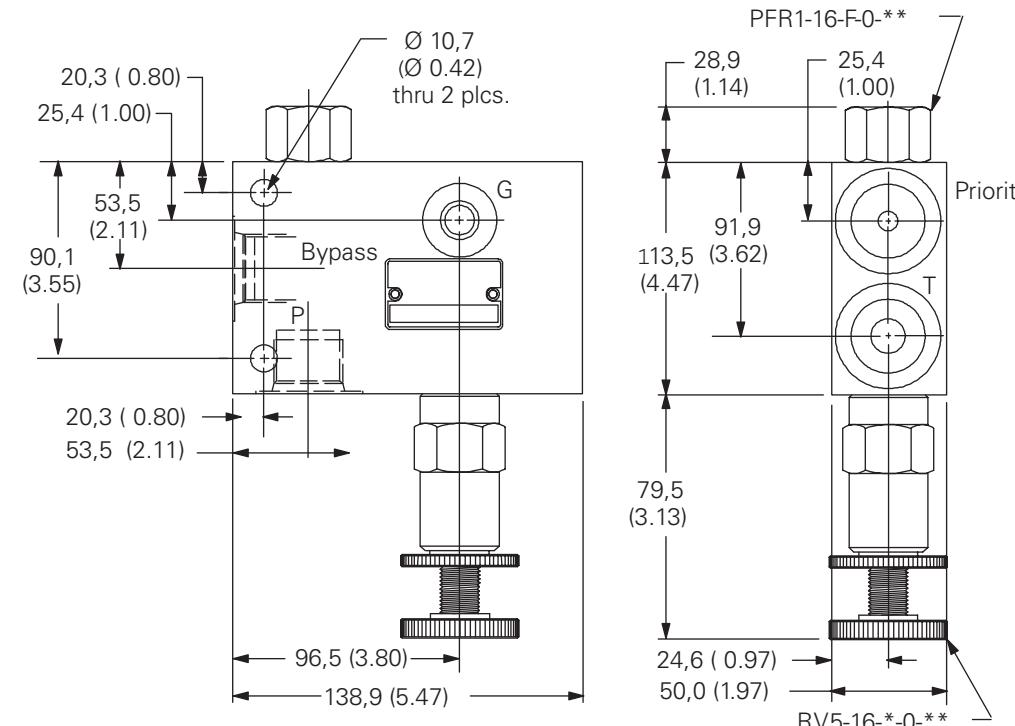
- Priority flow pressure compensation
- All ports except "T" can be pressurized to 210 bar (3000 psi)
- Aluminum in-line type housing
- Tamper proof and adjustable relief options
- Gauge port
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

RATINGS AND SPECIFICATIONS

Typical application pressure range	7 - 210 bar (100 - 3000 psi)
Maximum inlet flow	152 L/min (40 USgpm)
Regulated flow range	1,9 - 113 L/min (0.5-30 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min)
Temperature range	-40° to 120° C (-40° to 248° F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**Application**

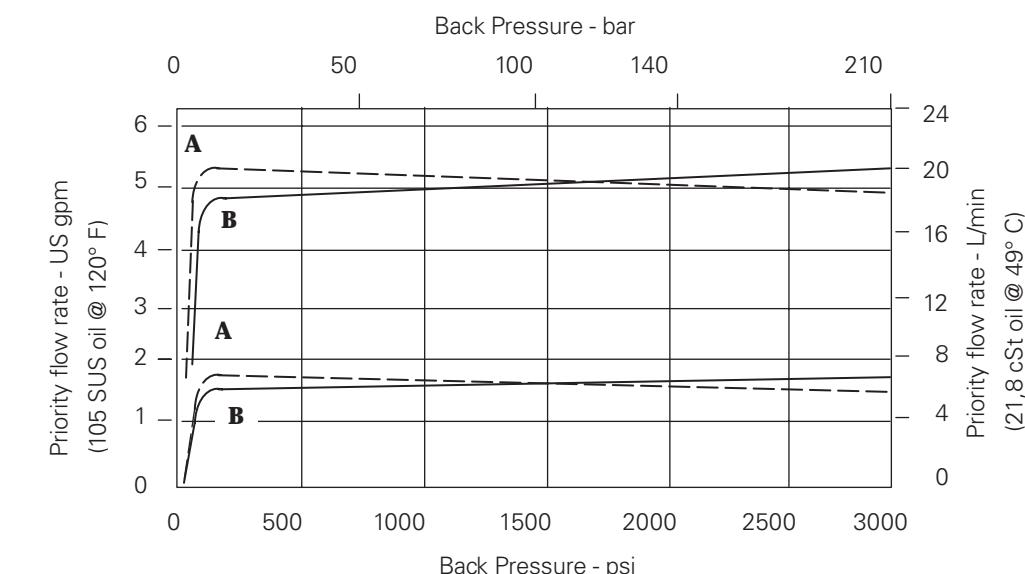
This standard valve package is used to maintain constant flow to priority circuits when input flow is greater than required, regardless of changes in upstream or downstream pressure. It will bypass the rest of the flow to an auxiliary circuit or to tank. Relief valve on a priority port limits pressure on a priority port, as well as ensures bypass flow when there is no demand on priority circuit.

PFRR - 16 (V) - * - A ** - * / * - * - 00

[1] Function PFRR - Pressure compensated priority flow control with relief on priority port	[4] Relief Control C - Cap K - Knob S - Screw	[7] Pressure Range 3 - 3 - 20 bar (50-300psi) 20 - 7 - 140 bar (100-2000psi) 35 - 17 - 240 bar (250-3500psi)	[9] Flow Setting Customer must specify flow 0,38-22,7 L/min (0.1 - 6 USgpm)
[2] Size 16 - 16 size	[5] Valve Housing Material A - Aluminum	[8] Pressure setting - user requested in 50 PSI steps example 10 - 1000psi 10.5 - 1050psi	[10] Special Features 00 - None (Only required if valve has special features, omitted if "00")
[3] Seals Blank - Buna N V - Viton®	[6] Port Size Viton is a registered trademark of E.I. DuPont		
		CODE P, BYPASS	PRIORITY, T
		8G 1" BSPP	3/4" BSPP
		16T SAE 16	SAE 12
			GAUGE
			HOUSING NUMBER
			02-178277
			02-178278

COMPOSITION CHART

Cartridge	Description	Quantity
PFR1-16-F-0-**	Priority flow regulator	1
RV5-10-*-0-**/**	Relief valve	1

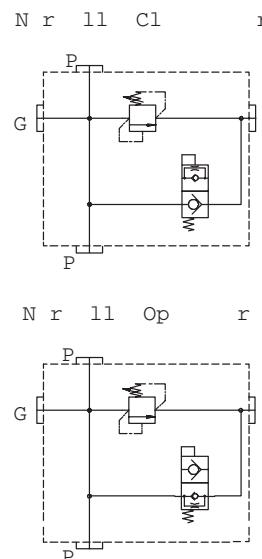
Typical Flow Regulation

A - Port 3, priority (regulated) outlet pressurized
B - Port 2, bypass outlet pressurized

Solenoid actuated
relief valve

Description

Solenoid actuated
relief valve

Functional Symbols**Features**

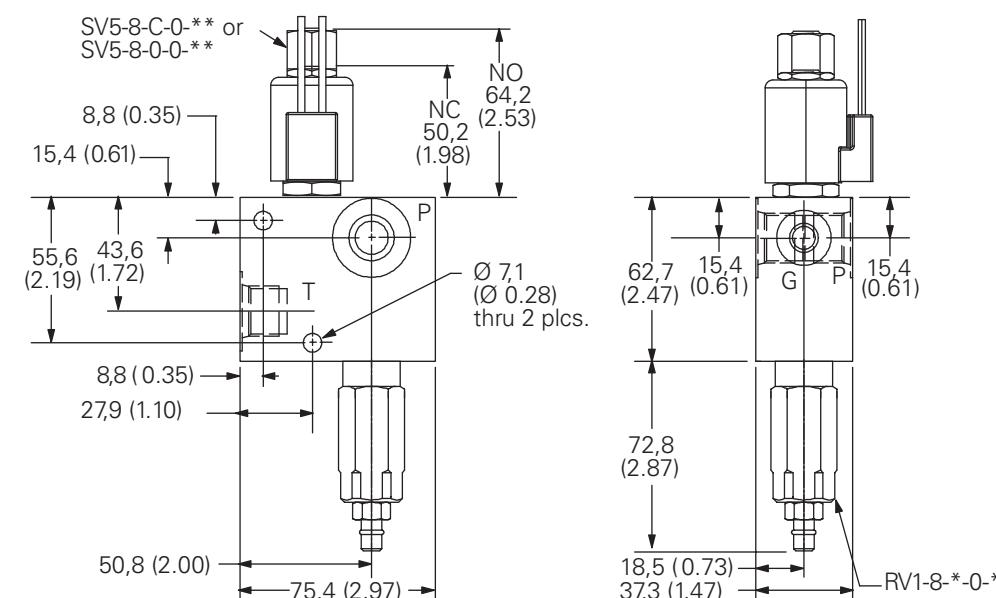
- Normally closed and normally open options
- Tamper proof or adjustable relief options
- Low power requirements
- Gauge port
- Aluminum in-line type housing
- Number of voltage and connector options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	23 L/min (6 USgpm)
Internal leakage	5 drops/min. @ 80% of crack pressure
Reseat pressure	80% of crack pressure
Typical vented ΔP	4 bar (60 psi) at rated flow
Coil specifications	
Power requirements	16 watts
Coil duty	continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

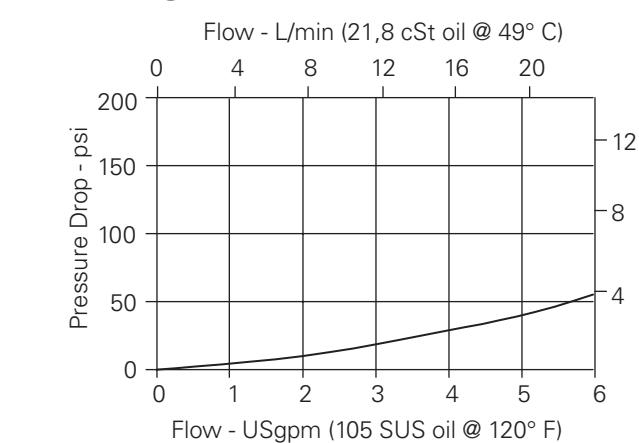
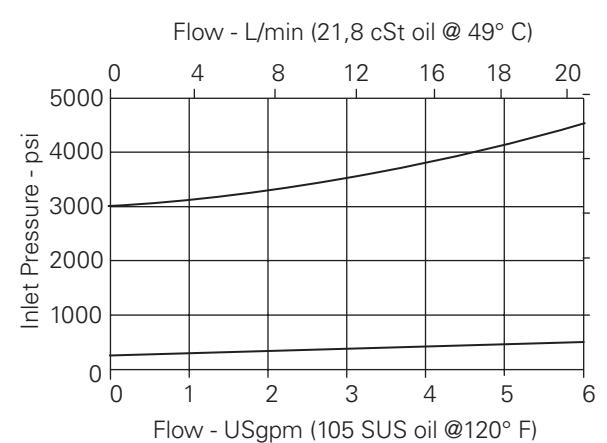
Dimensions

mm (inch)

**Model Code**

SRV - 8 (V) - * - * - A ** - ** / - * - ** - 00**

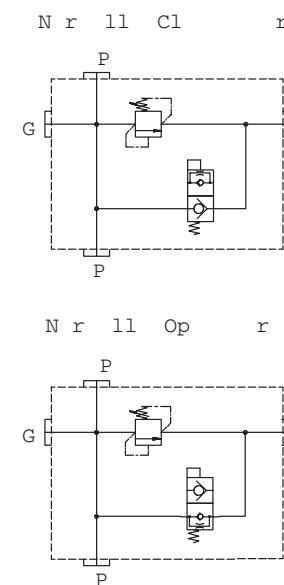
[1] Function SRV - Solenoid actuated relief valve	[5] Relief Control C - Cap K - Knob S - Screw	[8] Relief Pressure Range 3 - 3 - 20 bar (50-300psi) 36 - 20 - 240 bar (300-3600psi)
[2] Size 8 - 8 size	[6] Valve Housing Material A - Aluminum	[9] Voltage Rating 12D - 12VDC 24D - 24VDC 120A - 120VAC 240A - 240VAC
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont		[10] Connector types GS - ISO 4400 DIN 43650 connector PS - 1/2" NPT conduit WS - Leadwire
		[11] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
		K

Pressure Drop Curve (unloading)**Pressure Override Curves**

Solenoid actuated
relief valve

Description

Solenoid actuated
relief valve

Functional Symbol**Features**

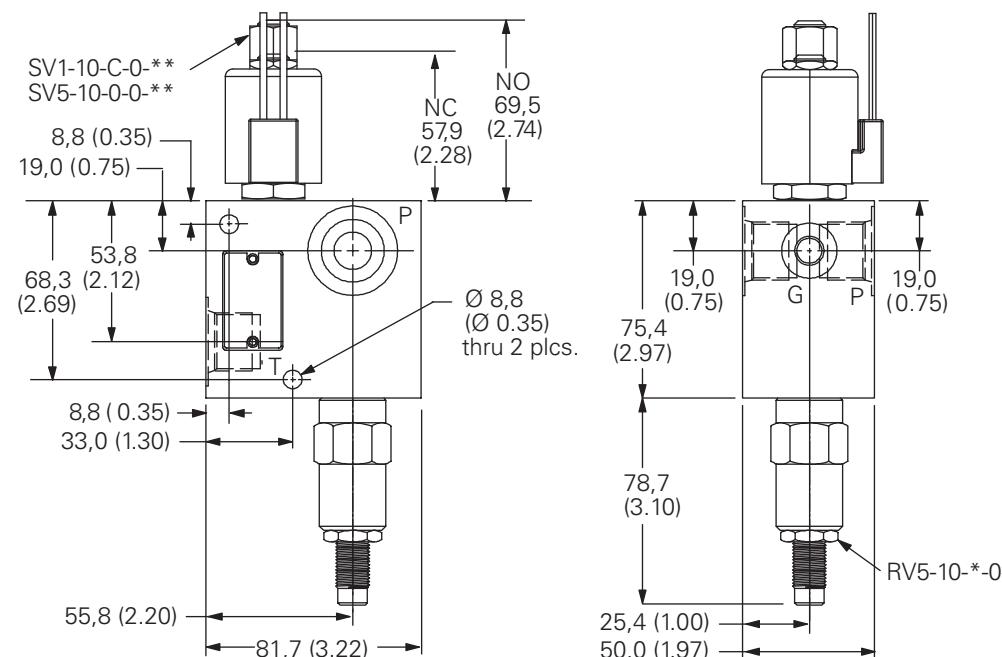
- Normally closed and normally open options
- Tamper proof or adjustable relief options
- Low power requirements
- Gauge port
- Aluminum in-line type housing
- Number of voltage and connector options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	57 L/min (15 USgpm)
Internal leakage	80 cm ³ /min (5 in ³ /min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	7 bar (100 psi) at rated flow
Coil specifications	
Power requirements	18 watts
Coil duty	continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

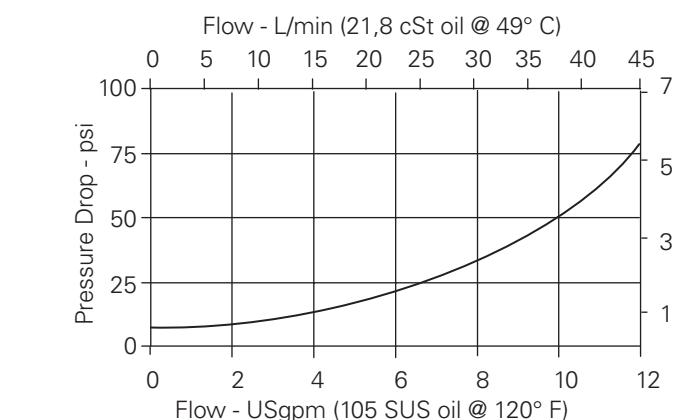
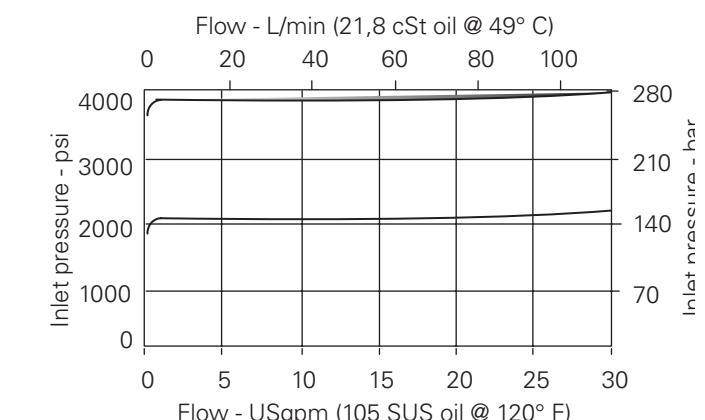
**Application**

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches relief valve setting.

Model Code

SRV - 10 (V) - * - * - A ** - * - / - *** - * - 00

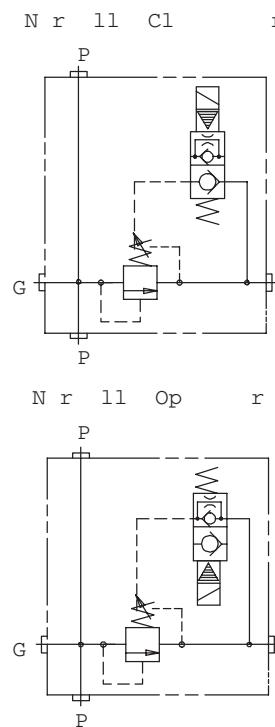
[1] Function SRV - Solenoid actuated relief valve	[5] Relief Control C - Cap K - Knob S - Screw	[8] Relief Pressure Range 3 - 3 - 20 bar (50-300psi) 35 - 17 - 240 bar (250-3500psi)
[2] Size 10 - 10 size	[6] Valve Housing Material A - Aluminum	[9] Voltage Rating 12D - 12VDC 24D - 24VDC 115A - 115VAC 230A - 230VAC
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont		[10] Connector types G - ISO 4400 DIN 43650 connector P - 1/2" NPT conduit W - Leadwire
	[7] Port Size CODE P,T 4G 1/2" BSPP 10T SAE 10	GAUGE 1/4 BSPP SAE 4
		HOUSING 02-178308 02-178309
[4] Type C - Normally closed O - Normally open		
		COMPOSITION CHART
	Cartridge	Description
	SV5-10-0-0-**	2 way/2 position N.O. poppet solenoid valve
	SV1-10-C-0-**	2 way/2 position N.C. poppet solenoid valve
	RV5-10-*-0-**	Relief valve, pilot operated
		Quantity
		1
		1
		1

**Pressure Drop Curve
(unloading)****Pressure Override Curves**

Solenoid actuated vented
relief valve

Description

Solenoid actuated vented relief valve

Functional Symbol**Features**

- Normally closed and normally open options
- Tamper proof or adjustable relief options
- Low power requirements
- Gauge port
- Aluminum in-line type housing
- Number of voltage and connector options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

Application

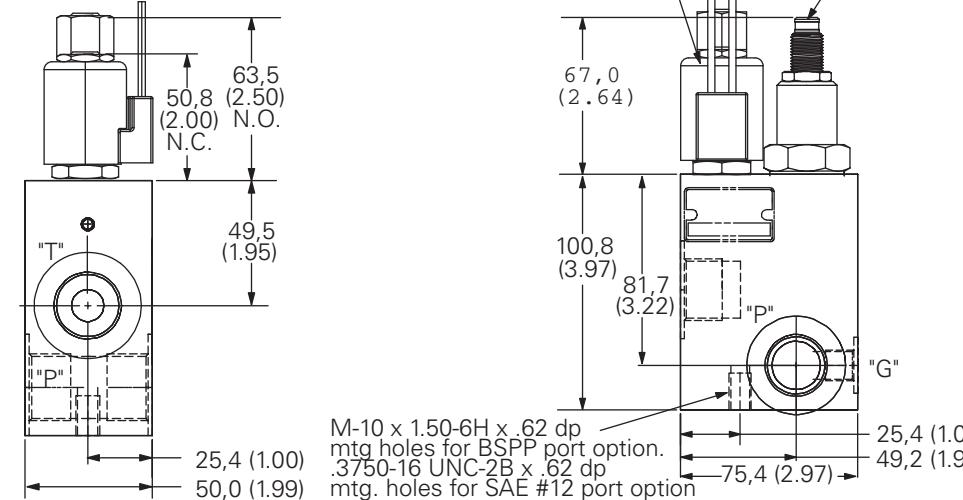
This standard valve package is designed for pump unloading via solenoid valve activation to control remotely ventable relief valve and system relief, when the solenoid valve is not activated.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	114 L/min (30 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min) maximum
Reseat pressure	90% of crack pressure
Typical vented ΔP	10 bar (150 psi) at rated flow
Coil specifications	
Power requirements	16 watts
Coil duty	continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F.)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

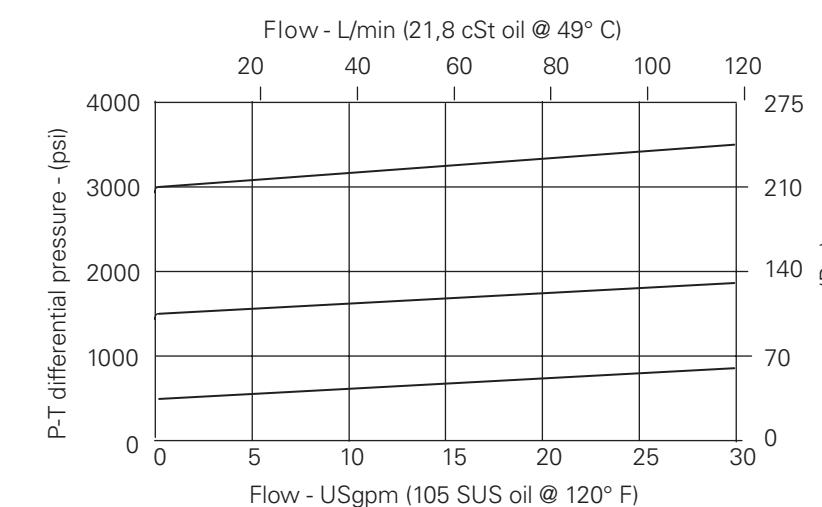
**Model Code**

SRV - 12 (V) - * - * - A ** - ** / - * - ** - 00**

[1] Function SRV - Solenoid operated ventable relief valve	[5] Relief Control C - Cap K - Knob S - Screw	[8] Relief Pressure Range 15 - 5 - 103 bar (75-1500psi) 30 - 10 - 207 bar (50-3000psi)
[2] Size 12 - 12 size	[6] Valve Housing Material A - Aluminum	[9] Voltage Rating 12D - 12VDC 24D - 24VDC 120A - 120VAC 240A - 240VAC
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont		[11] Special Features 00 - None (Only required if valve has special features, omitted if "00".)
	[7] Port Size	
	CODE P,T	GAUGE
	6G 3/4" BSPP	1/4 BSPP
	12T SAE 12	SAE #4
		HOUSING
		02-184898

COMPOSITION CHART

Cartridge	Description	Quantity
SV5-8-0-0-**	2 way/2 position N.O. poppet solenoid valve	1
SV5-8-C-0-**	2 way/2 position N.C. poppet solenoid valve	1
VRV11-12-*-*	Vented relief valve	1

**Pressure Drop Curves
(pressure override)**

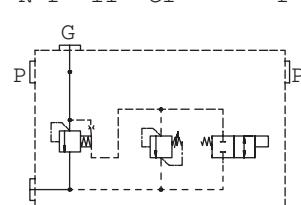
Solenoid actuated
relief valve

Description

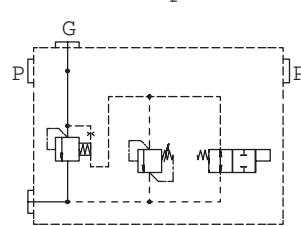
Solenoid actuated
relief valve

Functional Symbol

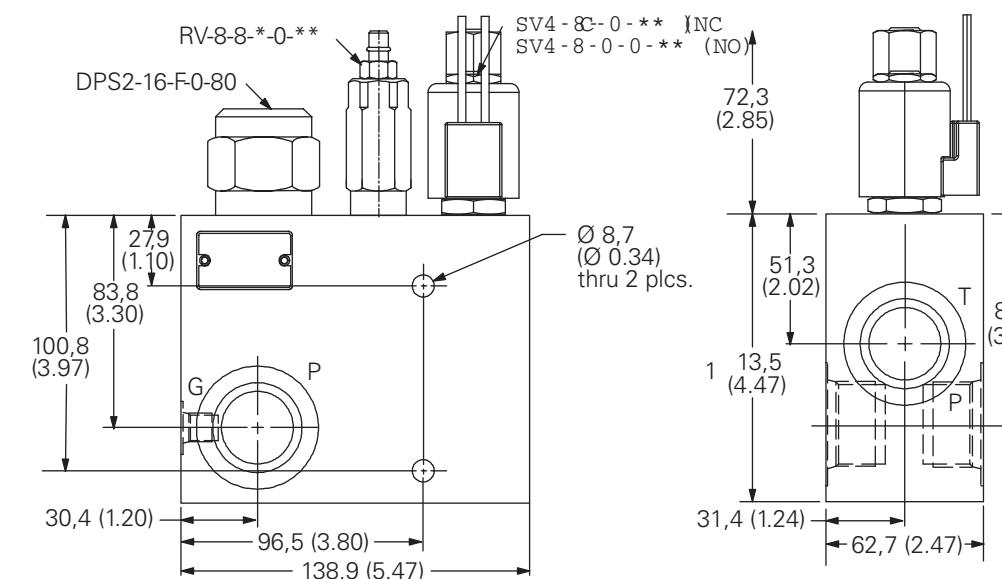
Nr 11 C1 r



Nr 11 Op r

**Dimensions**

mm (inch)

**Features**

- Normally closed and normally open options
- Tamper proof or adjustable relief options
- Low power requirements
- Gauge port
- Aluminum in-line type housing

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	225 L/min (60 USgpm)
Internal leakage	160 L/min (10 in³/min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	8 bar (120 psi) at rated flow
Coil specifications	
Power requirements	16 watts
Coil duty	continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F.)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Application

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches relief valve setting.

SRV - 16 (V) - * - * - A ** - ** / - * - ** - 00**

[1] Function **SRV** - Solenoid actuated relief valve **[5] Relief Control** **C** - Cap
K - Knob
S - Screw **[8] Relief Pressure Range** **240A** - 240VAC
15 - 3 - 100 bar (50-1500psi)
30 - 70-210 bar (1000-3000psi)

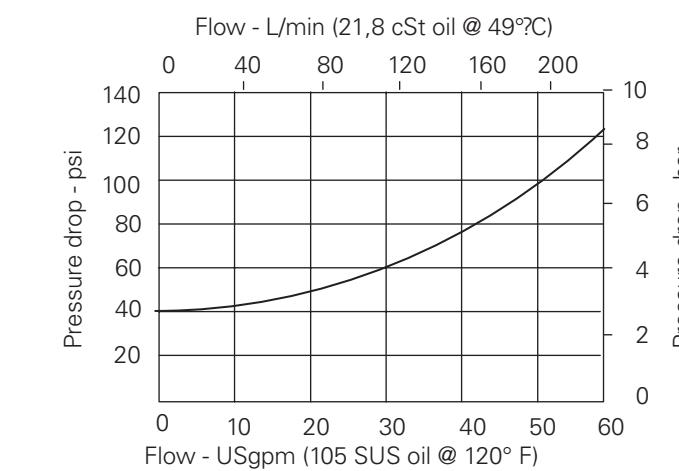
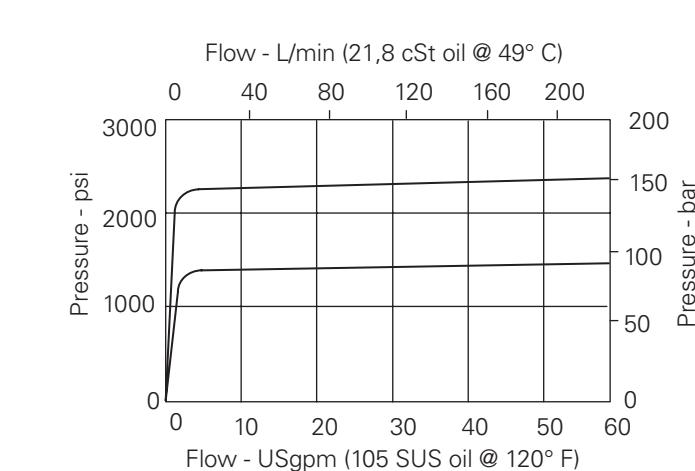
[2] Size **16** - 16 size **[6] Valve Housing Material** **A** - Aluminum **[9] Voltage Rating**
12D - 12VDC
24D - 24VDC
120A - 120VAC

[3] Seals **Blank** - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont

[7] Port Size **CODE P,T** **GAUGE** **[11] Special Features**
8G 1" BSPP 1/4 BSPP
16T SAE 16 SAE #4
12T SAE 12 SAE #4
00 - None
(Only required if valve has special features, omitted if "00".)

[4] Type **C** - Normally closed
O - Normally open

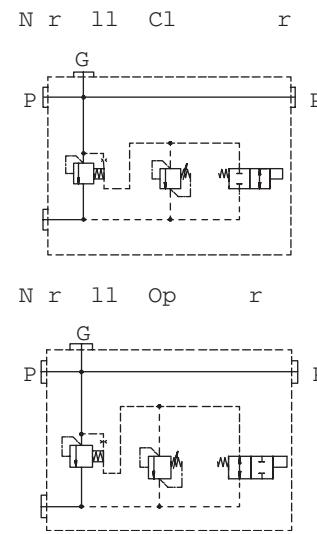
COMPOSITION CHART		
Cartridge	Description	Quantity
SV4-18-0-0-**	2 way/2 position N.O. poppet solenoid valve	1
SV4-8-C-0-0-**	2 way/2 position N.C. poppet solenoid valve	1
RV8-8-*-0-**	Relief valve	1
DPS2-16-V-F-0-80	Differential pressure sensing valve	1

**Pressure Drop Curve
(unload)****Pressure Override Curves**

Solenoid actuated
relief valve

Description

Solenoid actuated
relief valve

Functional Symbol**Features**

- Normally closed and normally open options
- Tamper proof or adjustable relief options
- Low power requirements
- Gauge port
- Aluminum in-line type housing
- Number of voltage and connector options
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

Application

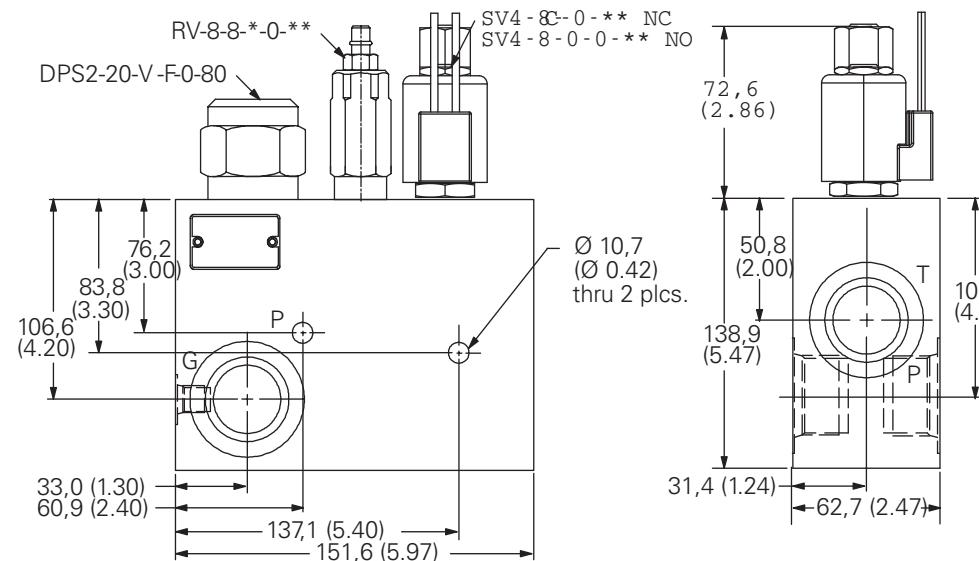
This standard valve package is designed for pump unloading via solenoid valve activation and pump relief when the solenoid valve is not activated and system pressure reaches relief valve setting.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	300 L/min (80 USgpm)
Internal leakage	160 cm ³ /min (10 in ³ /min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	9 bar (135 psi) at rated flow
Coil specifications	
Power requirements	16 watts
Coil duty	continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F.)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

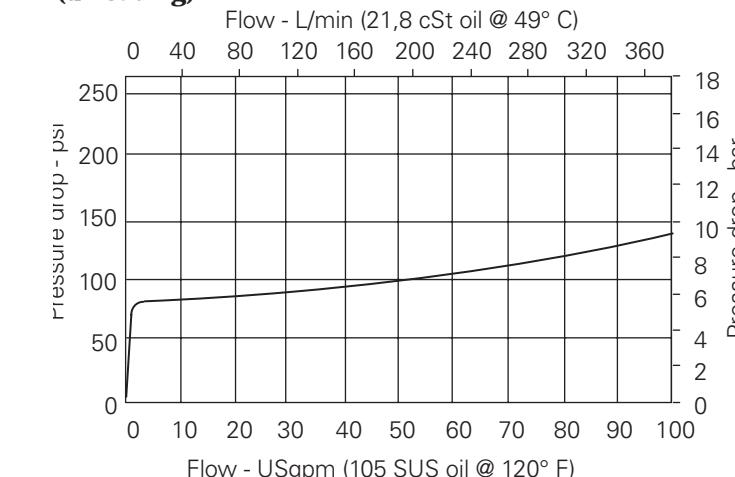
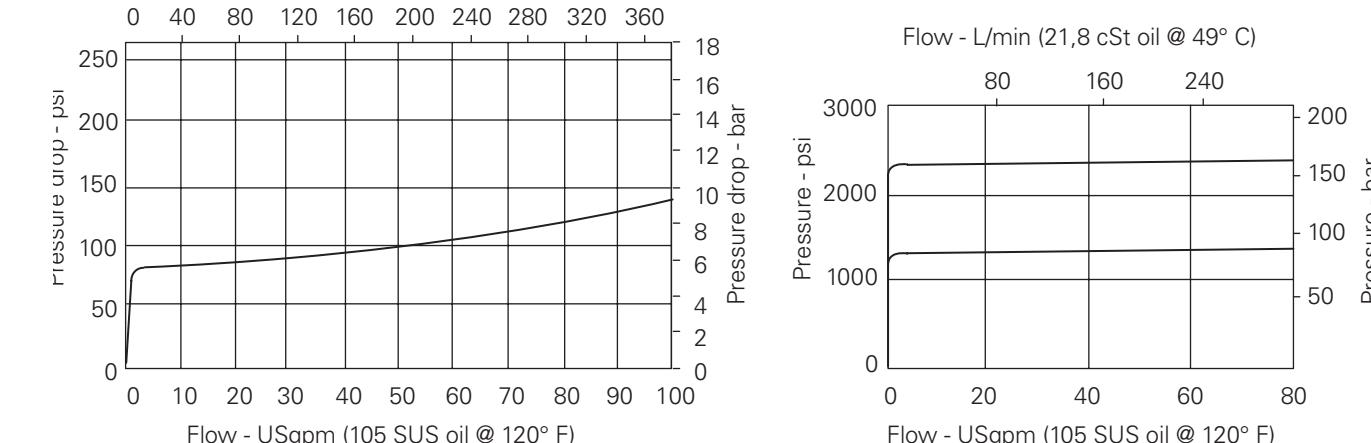
Dimensions

mm (inch)

**Model Code**

SRV - 20 (V) - * - * - A ** - ** / - * - ** - 00**

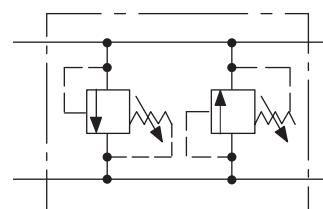
[1] Function SRV - Solenoid actuated relief valve	[5] Relief Control C - Cap K - Knob S - Screw	[8] Relief Pressure Range 15 - 3 - 100 bar (50-1500 psi) 30 - 70-210 bar (1000-3000 psi)	[10] Connector types GS - ISO 4400 DIN 43650 connector PS - 1/2" NPT conduit WS - Leadwire
[2] Size 20 - 20 size	[6] Valve Housing Material A - Aluminum	[9] Voltage Rating 12D - 12VDC 24D - 24VDC 120A - 120VAC 240A - 240VAC	
[3] Seals Blank - Buna N V - Viton® Viton is a registered trademark of E.I. DuPont	[7] Port Size CODE P,T 12G 1 1/4" BSPP 20T SAE 20	GAUGE 1/4 BSPP SAE #4	HOUSING 02-178312 02-178313
[4] Type C - Normally closed O - Normally open			
COMPOSITION CHART	Cartridge	Description	Quantity
	SV4-8-0-0-**	2 way/2 position N.O. poppet solenoid valve	1
	SV4-8-C-0-**	2 way/2 position N.C. poppet solenoid valve	1
	RV8-8-*-0-**	Relief valve	1
	DPS2-20-V-F-0-80	Differential pressure sensing valve	1

**Pressure Drop Curve
(unloading)****Pressure Override Curves**

Model Code

Description

Cross port relief valve

Functional Symbol**Features**

- Tamper proof and adjustable relief options
- Aluminum in-line type housing
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

Application

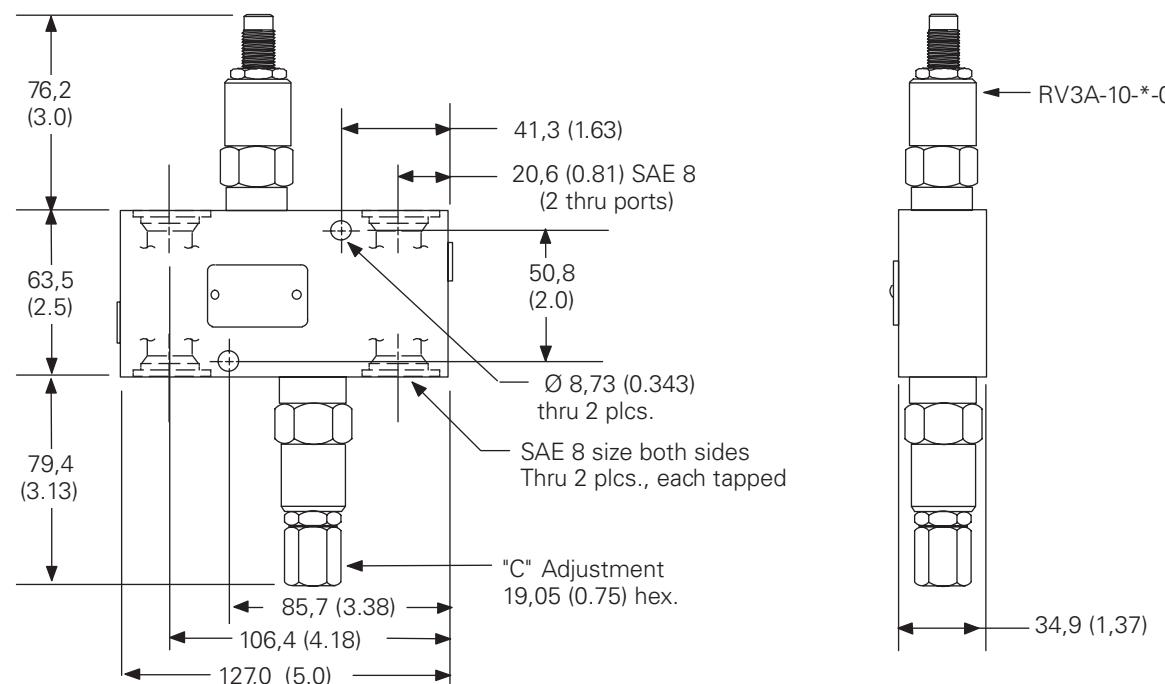
This standard valve package is used to provide pressure relief for bi-directional motors and cylinders.

RATINGS AND SPECIFICATIONS

Typical application pressure	17 - 210 bar (250 - 3000 psi)
Flow rating	76 L/min (20 USgpm)
Reseat pressure	90% of crack pressure
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)



[1] Function
CRV - Cross-port relief valve

[2] Size
10 - 10 size

[3] Seals
Blank - Buna N
V - Viton®
Viton is a registered trademark of E.I. DuPont de Nemours and Company

[4] Relief Control
C - Cap
K - Knob
S - Screw

[5] Valve Housing Material
A - Aluminum

[6] Port Size

CODE	PORT SIZE	HOUSING NUMBER
3G	3/8" BSPP	02-178476
8T	SAE 8	889185

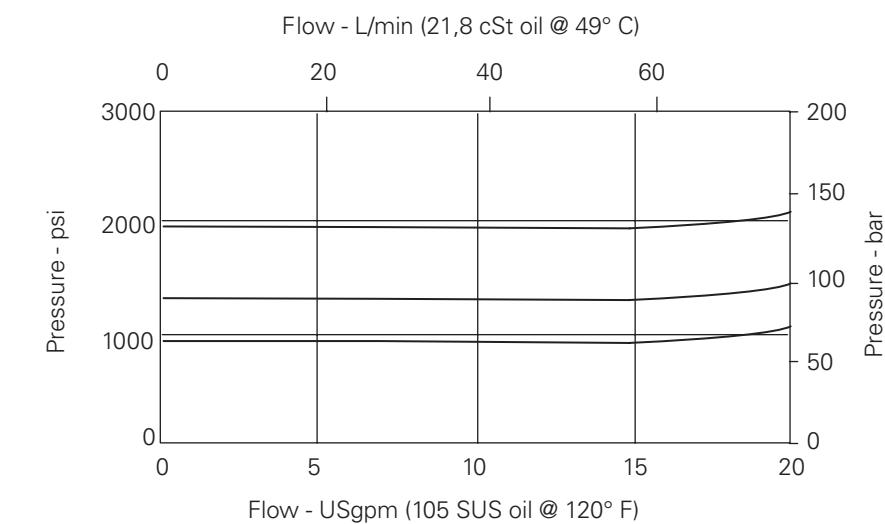
[7] Pressure range
6 - 6 - 40 bar (100-600psi)
36 - 40 - 250 bar (600-3600psi)

[8] Pressure setting - user requested in 50 PSI steps
example
10 - 1000psi
10.5 - 1050psi

[9] Special Features
00 - None
(Only required if valve has special features, omitted if "00")

COMPOSITION CHART

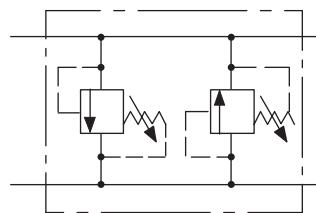
Cartridge	Description	Quantity
RV3A-10-*-*	Relief valve	2

Pressure Override Curve

Model Code

Description

Cross port relief valve

Functional Symbol**Features**

- Tamper proof and adjustable relief options
- Aluminum in-line type housing
- All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing

Application

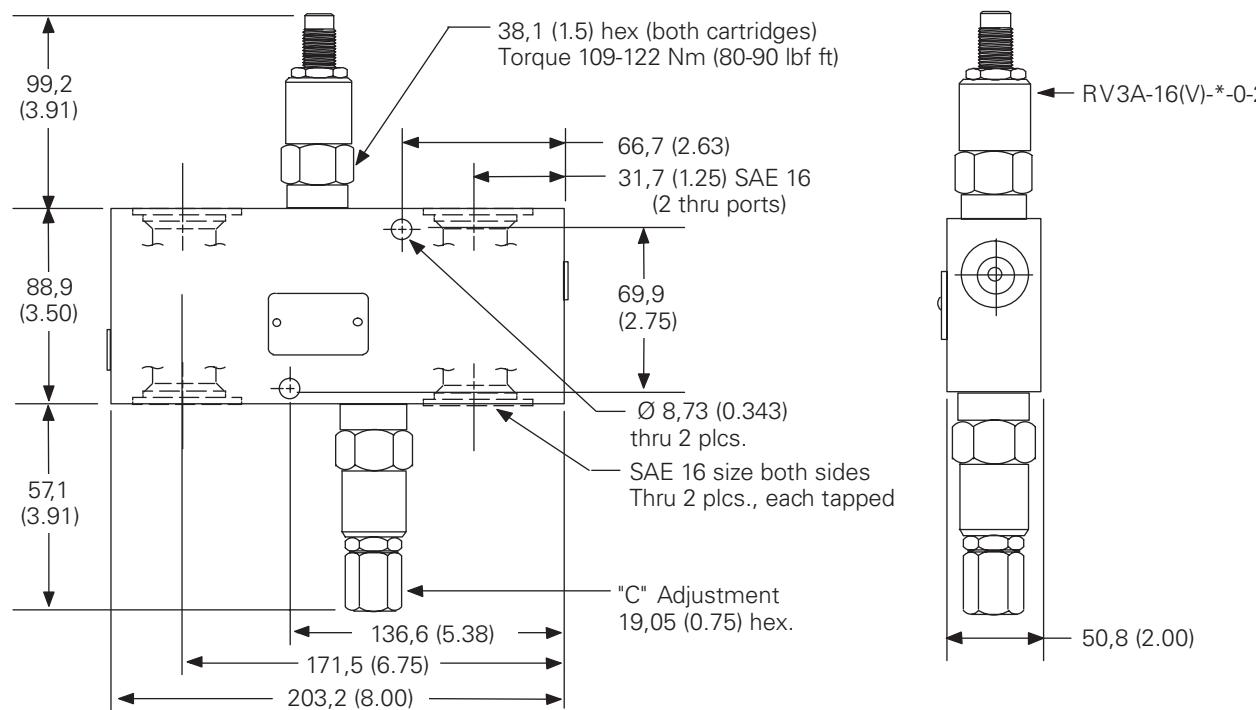
This standard valve package is used to provide pressure relief for bi-directional motors and cylinders.

RATINGS AND SPECIFICATIONS

Typical application pressure	17 - 172 bar (250 - 3500 psi)
Flow rating	303 L/min (80 USgpm)
Reseat pressure	90% of crack pressure
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**[1] Function**

CRV - Cross-port relief valve

[2] Size

16 - 16 size

[3] Seals

Blank - Buna-N
V - Viton®

Viton is a registered trademark of E.I. DuPont de Nemours and Company

CRV - 16 (V) - * - A * - ** / ** - 00**

[4] Relief Control

C - Cap
K - Knob
S - Screw

[6] Port Size

CODE	PORT SIZE	HOUSING NUMBER
8G	1" BSPP	02-178477
16T	SAE 16	889189

[7] Pressure range

35 - 17 - 175 bar (250-3500psi)

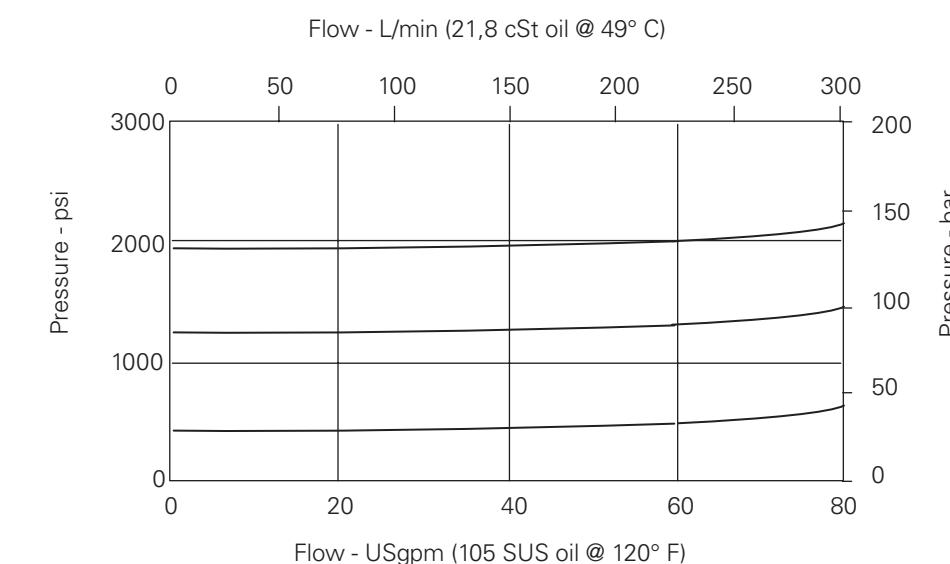
[8] Pressure setting - user requested in 50 PSI steps example
10 - 1000psi
10.5 - 1050psi

[9] Special Features

00 - None
(Only required if valve has special features, omitted if "00".)

COMPOSITION CHART

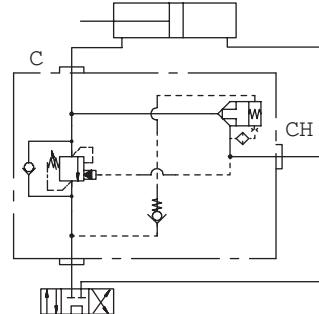
Cartridge	Description	Quantity
RV3A-16-*-0-**	Relief valve	2

Pressure Override Curve

Pressure sensitive
regenerative valve package

Description

Pressure sensitive
regenerative valve package

Functional Symbol**Features**

- Automatic kick out of regenerative operation made via load pressure sensing.
- Tamper proof and adjustable pressure setting options.
- Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve.
- Aluminum in-line type housing

Application

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following:

- Rod to diameter ratio.
- The pressure required to move a cylinder.
- Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

RATINGS AND SPECIFICATIONS

Typical application pressure

210 bar (3000 psi)

Maximum regenerative flow 57 L/min (15 USgpm)

Regeneration diminishes progressively above setting of CBV1-10.

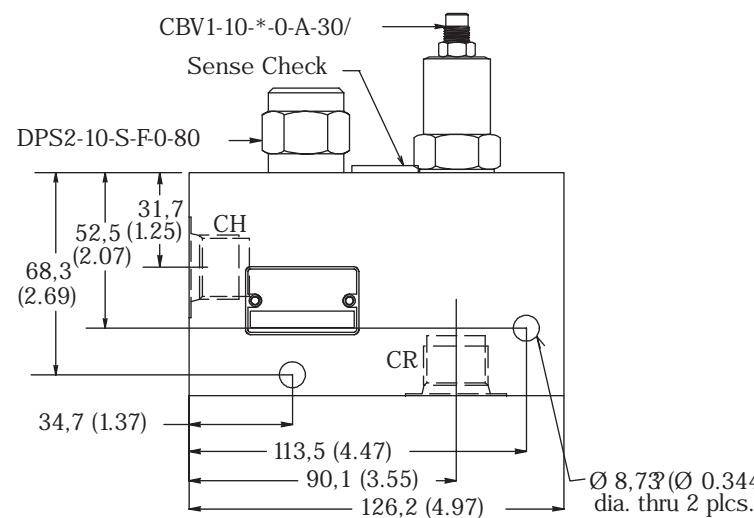
Temperature range

-40° to 120° C (-40° to 248° F)

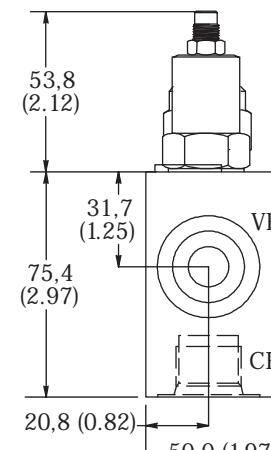
Note: Regeneration circuits apply only to single rod cylinders in extension direction.

Dimensions

mm (inch)

**Note**

This valve package should not be used as a load holding or load lowering control valve.

**Model Code**

RGV - 10 (V) - * - A * - ** / ** - 00**

[1] Function
RGV - Pressure sensitive regeneration valve

[2] Size
10 - 10 size

[3] Seals

[4] Relief Control
C - Cap
K - Knob
S - Screw

[5] Valve Housing Material
A - Aluminum

[6] Port Size

CODE	PORT SIZE	HOUSING NUMBER
4G	1/2" BSPP	02-178930
10T	SAE 10	02-178929

[7] Pressure range*
30 - 60 - 210 bar (900-3000psi)
* System pressure is limited to 210 bar (3000psi)

[8] Pressure setting - user requested in 50 PSI steps
example
10 - 1000psi
10.5 - 1050psi

[9] Special Features
00 - None
(Only required if valve has special features, omitted if "00".)

COMPOSITION CHART

Cartridge	Description	Quantity
CBV1-10-*-0-A-30/	Counterbalance valve	1
DPS2-10-S-F-0-80	Differential pressure sensing	1
566395	Sense check kit	1

Application Notes

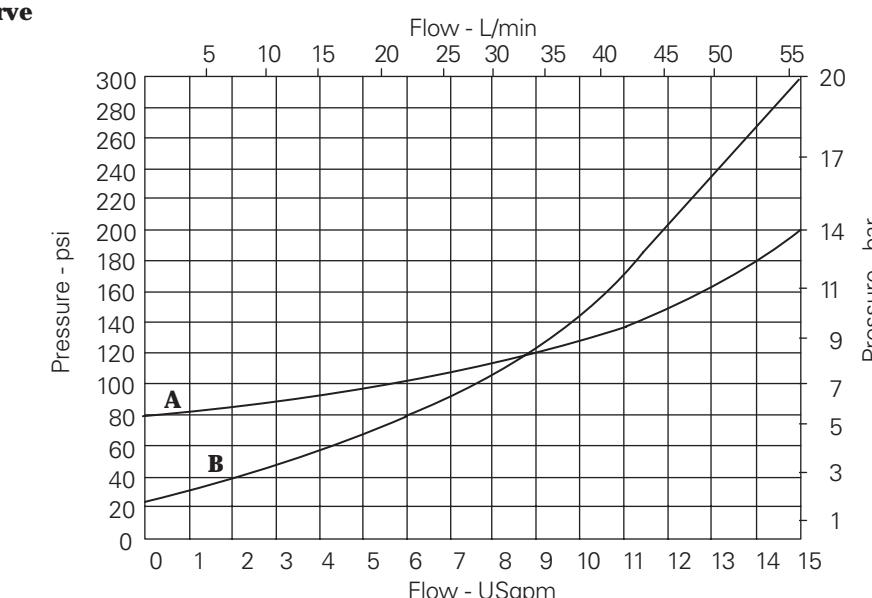
Formulas to calculate flow in regeneration circuits are:
(Where Db = Bore Diameter and Dr = Rod Diameter)

$$\text{Combined Flow} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

(pump flow plus regenerative flow)

$$\text{Regenerative Flow} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

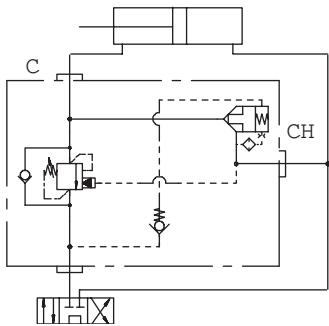
$$\text{Retraction Flow} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

Pressure Drop Curve

Pressure sensitive
regenerative valve package

Description

Pressure sensitive
regenerative valve package

Functional Symbol**Features**

- Automatic kick out of regenerative operation made via load pressure sensing.
- Tamper proof and adjustable pressure setting options.
- Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve.
- Aluminum in-line type housing

Application

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following:

- Rod to diameter ratio.
- The pressure required to move a cylinder.
- Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

RATINGS AND SPECIFICATIONS

Typical application pressure

210 bar (3000 psi)

Maximum regenerative flow 114 L/min (30 USgpm)

Regeneration diminishes progressively above setting of CBV1-12.

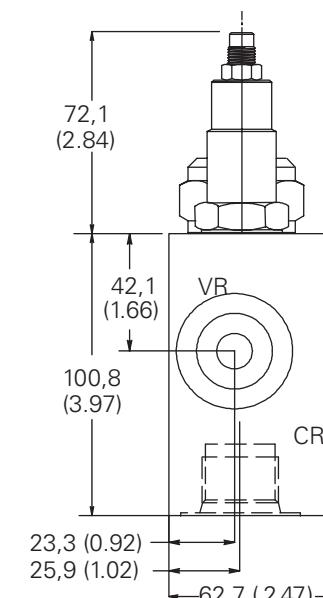
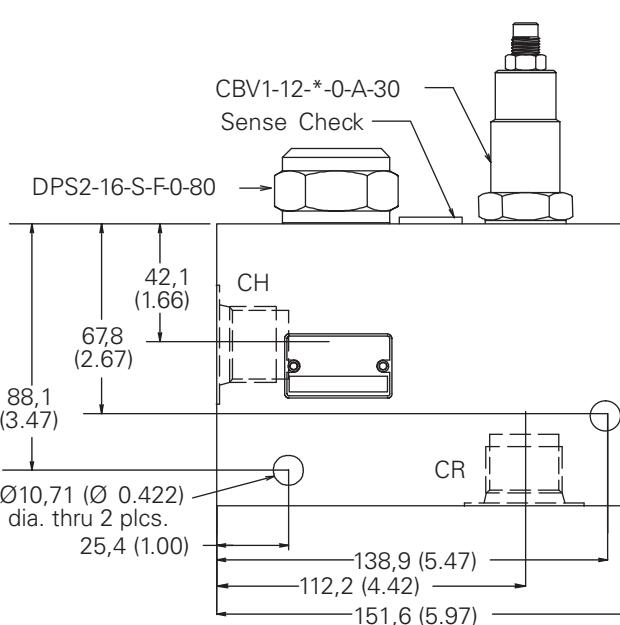
Temperature range

-40° to 120° C (-40° to 248° F)

Note: Regeneration circuits apply only to single rod cylinders in extension direction.

Dimensions

mm (inch)

**Note**

This valve package should not be used as a load holding or load lowering control valve.

Model Code

RGV - 12 (V) - * - A * - ** / ** - 00**

1

2

3

4

5

6

7

8

9

1 Function

RGV - Pressure sensitive
regeneration valve

2 Size

12 - 12 size

3 Seals

Blank - Buna N
V - Viton®
Viton is a registered trademark
of E.I. DuPont

4 Relief Control

C - Cap
K - Knob
S - Screw

6 Port Size

CODE	PORT SIZE	HOUSING NUMBER
6G	3/4" BSPP	02-178932
12T	SAE 12	02-178931

7 Pressure range*

30 - 60 - 210 bar (900-3000psi)

* System pressure is limited to
210 bar (3000)psi

8 Pressure setting - user
requested in 50 PSI steps
example

10 - 1000psi
10.5 - 1050psi

9 Special Features

00 - None
(Only required if valve has
special features, omitted if
"00".)

COMPOSITION CHART

Cartridge	Description	Quantity
CBV1-12-*-0-A-30/	Counterbalance valve	1
DPS2-16-S-F-0-80	Differential pressure sensing	1
566395	Sense check kit	1

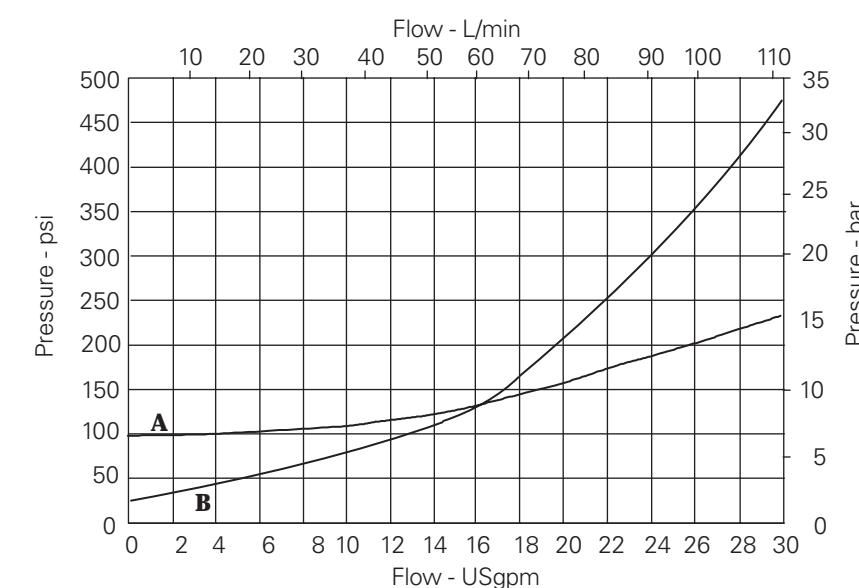
Application Notes

Formulas to calculate flow in regeneration circuits are:
(Where Db = Bore Diameter and Dr = Rod Diameter)

$$\text{Combined Flow} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

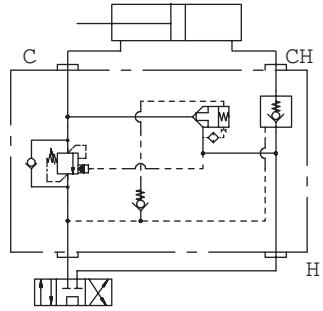
Pressure Drop Curves

A - Port CR to CH
B - Port VR to CR

Pressure sensitive
regenerative valve package
with load locking

Description

Pressure sensitive
regenerative valve package
with load locking

Functional Symbol**Features**

- Automatic kick out of regenerative operation made via load pressure sensing.
- Tamper proof and adjustable pressure setting options.
- Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve.
- Provides manual override on POC cartridge to lower the load in the event of power loss
- Aluminum in-line type housing

Application

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following:

- Rod to diameter ratio.
- The pressure required to move a cylinder.
- Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

RATINGS AND SPECIFICATIONS

Typical application pressure

210 bar (3000 psi)

Maximum regenerative flow 57 L/min (15 USgpm)

Regeneration diminishes progressively above setting of CBV1-10.

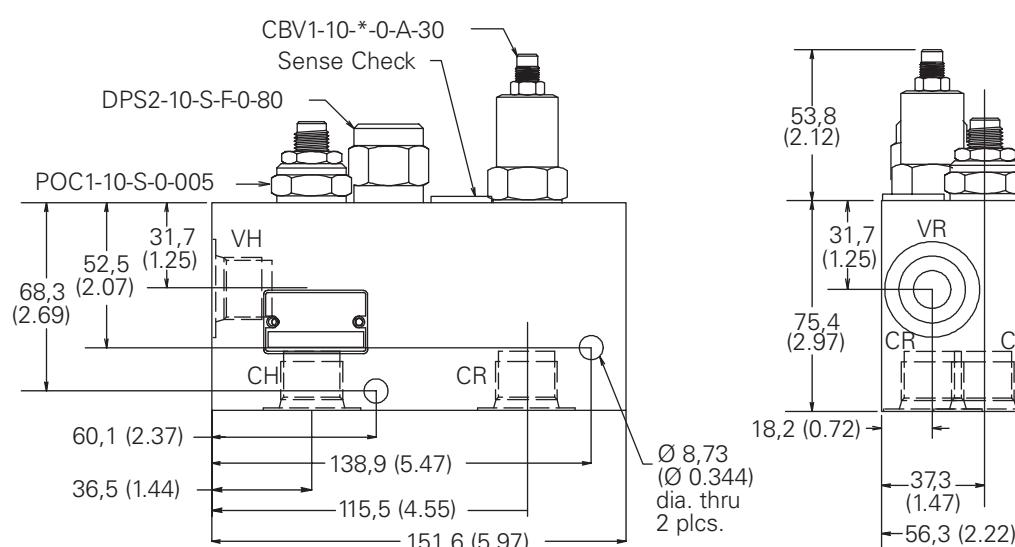
Temperature range

-40° to 120° C (-40° to 248° F)

Note: Regeneration circuits apply only to single rod cylinders in extension direction.

Dimensions

mm (inch)

**Note**

This valve package should not be used as a load holding or load lowering control valve.

Model Code

RLV - 10 (V) - * - A * - ** / ** - 00**

[1] Function

RLV - Pressure sensitive regenerative valve w/ load holding check valve

[4] Relief Control

C - Cap
K - Knob
S - Screw

[6] Port Size

CODE	PORT SIZE	HOUSING NUMBER
4G	1/2" BSPP	02-178934
10T	SAE 10	02-178933

[2] Size

10 - 10 size

[5] Valve Housing Material

A - Aluminum

[7] Pressure range*

30 - 60 - 210 bar (900-3000psi)

* System pressure is limited to 210 bar (3000)psi

[8] Pressure setting - user requested in 50 PSI steps example

10 - 1000psi

10.5 - 1050psi

COMPOSITION CHART

Cartridge	Description	Quantity
CBV1-10-*-0-A-30/	Counterbalance valve	1
DPS2-10-S-F-0-80	Differential pressure sensing	1
POC1-10-S-0-005	Pilot operated check valve	1
566395	Sense check kit	1

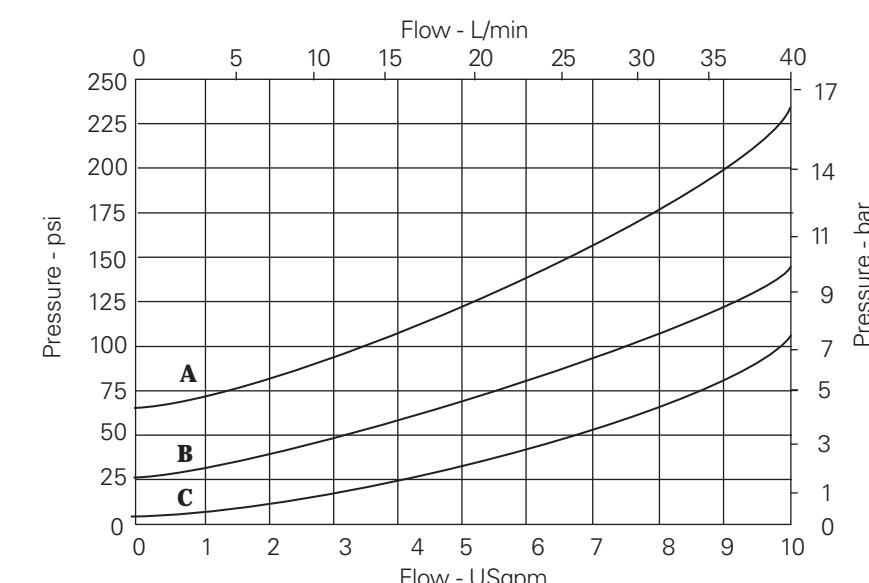
Application Notes

Formulas to calculate flow in regeneration circuits are:
(Where Db = Bore Diameter and Dr = Rod Diameter)

$$\text{Combined Flow} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

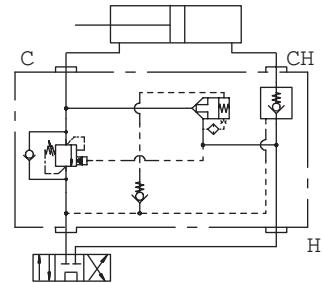
Pressure Drop Curves

A - Port CR to CH
B - Port VR to CR
C - Port VH to CH

Pressure sensitive
regenerative valve package
with load locking

Description

Pressure sensitive
regenerative valve package
with load locking

Functional Symbol**Features**

- Automatic kick out of regenerative operation made via load pressure sensing.
- Tamper proof and adjustable pressure setting options.
- Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve.
- Provides manual override on POC cartridge to lower the load in the event of power loss.
- Aluminum in-line type housing

Application

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed. When applying pressure sensitive regenerative

valves consider the following:

- Rod to diameter ratio.
- The pressure required to move a cylinder.
- Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

RATINGS AND SPECIFICATIONS

Typical application pressure

210 bar (3000 psi)

Maximum regenerative flow 114 L/min (30 USgpm)

Regeneration diminishes progressively above setting of CBV1-12.

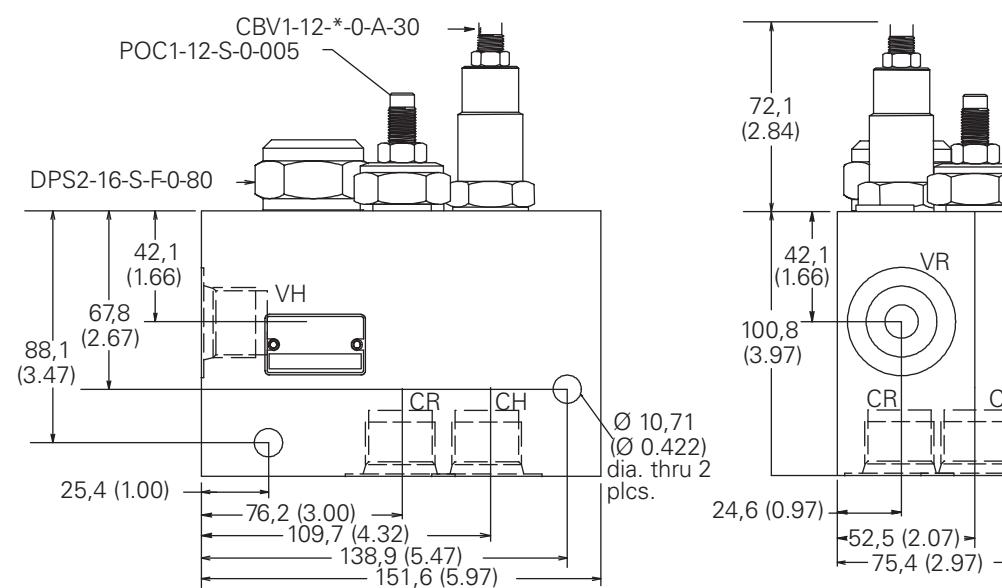
Temperature range

-40° to 120° C (-40° to 248° F)

Note: Regeneration circuits apply only to single rod cylinders in extension direction.

Dimensions

mm (inch)

**Note**

This valve package should not be used as a load holding or load lowering control valve.

Model Code

RLV - 12 (V) - * - A * - ** / ** - 00**

[1] Function

RLV - Pressure sensitive regeneration valve w/ load holding check valve

[4] Relief Control

C - Cap
K - Knob
S - Screw

[6] Port Size

CODE	PORT SIZE	HOUSING NUMBER
6G	3/4" BSPP	02-178936
12T	SAE 12	02-178935

[2] Size

12 - 12 size

[3] Seals

Blank - Buna N
V - Viton®

Viton is a registered trademark of E.I. DuPont

[5] Valve Housing Material

A - Aluminum

[7] Pressure range*

30 - 60 - 210 bar (900-3000psi)

* System pressure is limited to

210 bar (3000psi)

[8] Pressure setting - user requested in 50 PSI steps
example
10 - 1000psi
10.5 - 1050psi

COMPOSITION CHART

Cartridge	Description	Quantity
CBV1-12-*0-A-30/	Counterbalance valve	1
DPS2-16-S-F-0-80	Differential pressure sensing	1
POC1-12-S-0-005	Pilot operated check valve	1
566395	Sense check kit	1

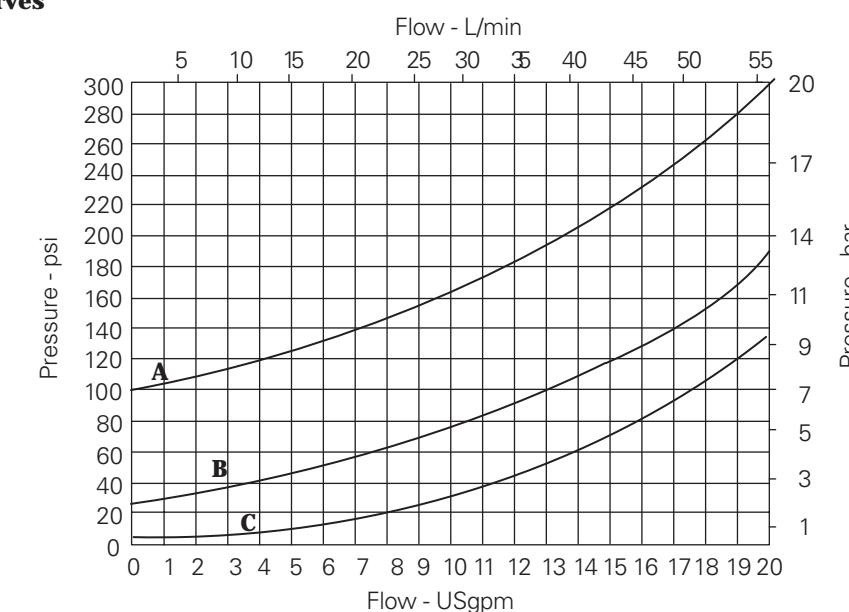
Application Notes

Formulas to calculate flow in regeneration circuits are:
(Where Db = Bore Diameter and Dr = Rod Diameter)

$$\text{Combined Flow} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

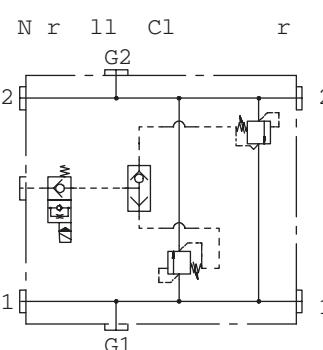
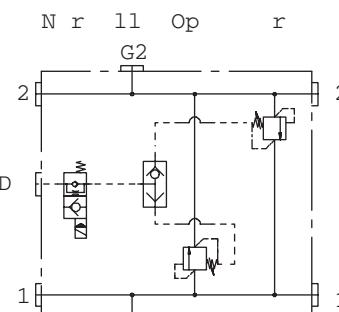
Pressure Drop Curves

A - Port CR to CH
B - Port VR to CR
C - Port VH to CH

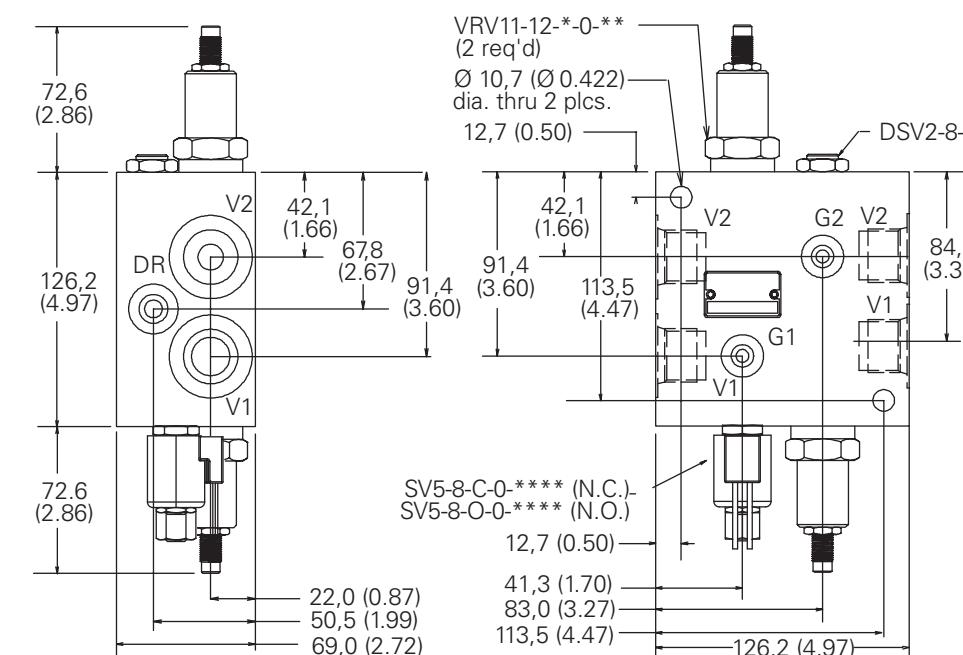
Cross port relief with
shuttle and solenoid vent

Description

Cross port relief with
shuttle and solenoid vent

Functional Symbol**Dimensions**

mm (inch)

**Features**

- Normally closed and normally open options.
- Tamper proof or adjustable relief options
- Gauge port.
- Low power requirements.
- Number of voltages and connectors options.

RATINGS AND SPECIFICATIONS

Typical application pressure	210 bar (3000 psi)
Flow rating	114 L/min (30 USgpm)
Reseat pressure	90% of crack pressure
Coil specifications	
Power requirements – 16 watts Magnet wire – UL class N rated (200 C)	
Coil duty – continuous from 85% to 110% of nominal voltage	
AC coils are internally rectified	
Temperature range	
-40° to 120° C (-40° to 248° F)	

Application

This standard valve package is used to provide pressure line relief for bi-directional motors and cylinders. With the addition of a remotely controlled shuttle valve, allowance is made for motor slip or cylinder dump conditions.

Model Code

SCR - 1 (V) - * - * - A ** **/** - *** ** - 00

[1] Function

SCR - Solenoid actuated crossover relief valve with shuttle

[2] Size

1 - 114 L/min (30 USgpm)

[3] Seals

Blank - Buna N

V - Viton®

Viton is a registered trademark of E.I. DuPont

[5] Relief Control

C - Cap

K - Knob

S - Screw

[6] Valve Housing Material

A - Aluminum

[7] Port Size

CODE	V1, V2	GAUGE	DRAIN	HOUSING NUMBER
6G	3/4" BSPP	1/4" BSPP	3/8" BSPP	02-178938
12T	SAE 12	SAE 4	SAE 6	02-178937

[4] Type

C - Normally closed

O - Normally open

[8] Pressure range*

15 - 5 - 100 bar (75-1500psi)

30 - 10 - 210 bar (150-3000psi)

* System pressure is limited to 210 bar (3000psi)

[9] Pressure setting

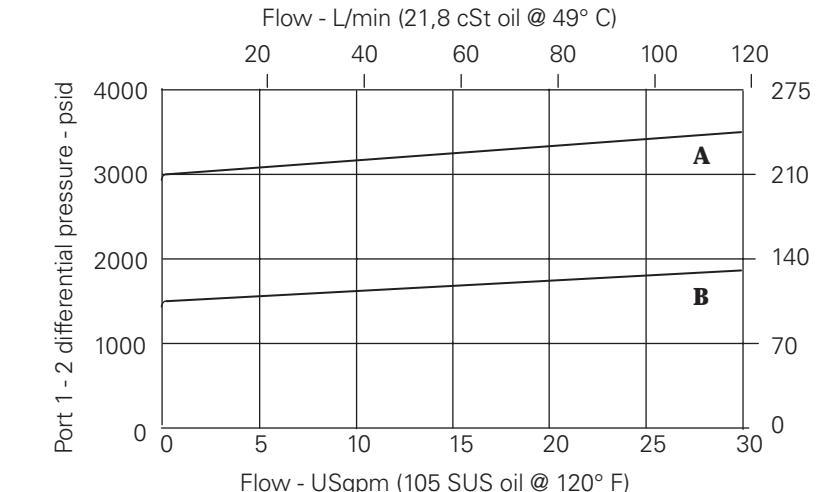
- user requested in 50 PSI steps example

10 - 1000psi

10.5 - 1050psi

COMPOSITION CHART

Cartridge	Description	Catalog	Quantity
VRV11-12-*-*/*	Ventable relief valve	725	2
DSV2-8-B-0	Shuttle valve	721	1
SV5-8-C-0-**	Solenoid valve, N.C.	727	1
SV5-8-O-0-**	Solenoid valve, N.O.	727	1

Pressure Drop Curves

A - 30 - pressure range code
B - 15 - pressure range code

Description

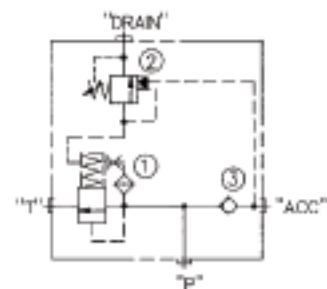
Unloading valve

Features

- xxxxxxxxxxxxxxxxxxxx

Application

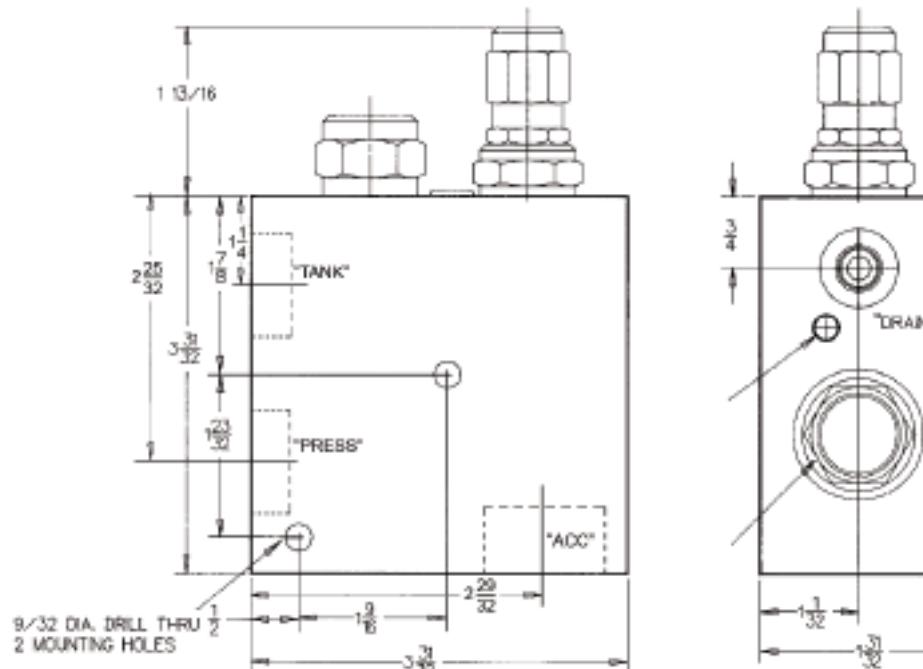
- xxxxxxxxxxxxxxxxxxxx
- xxxxxxxxxxxxxxxxxxxx

Functional Symbol**RATINGS AND SPECIFICATIONS**

Typical application pressure	210 bar (3000 psi)
Flow rating	Up to 57 L/min (15 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Dimensions

mm (inch)

**[1] Function****UV2** - Unloading valve**[3] Ports****8T** - SAE - 8**[6] Pressure Setting (optional)**

Specified by customer in 50
psi increments) for example :
20 - 140 bar (2000 psi)
25 - 172 bar (2500 psi)

[2] Size & Seals**10** - Buna N
10V - Viton®

Viton is a registered trademark
of E.I. DuPont

[4] Load Ratio

90 = 90%
85 = 85%
80 = 80%
75 = 75%

[5] Pressure Range

15 300-1500 psi
30 1500-3000 psi

COMPOSITION CHART

Cartridge	Description	Catalog	Quantity
CV1-10X-P-0-5	Poppet type check vale	G-8	1
DPS2-10X-V-F-0-80	Differential pressure sensing valve	I-18	1
PUV3-10X-XX-XX/XX	Pilot unloading valve	E-70	1