

Relay Card

EEA-REL-452-A-10 Series

General Description

This card allows logic links to be made between individual functional groups of a control system.

Features and Benefits


- 10 separate switchable relays.
- 5 normally-open contacts and 5 change-over contacts.
- Switching status of relays indicated by LEDs on the front panel.
- Encapsulated relays with gold-plated contacts for long life.

Operating Data

Relay voltage 24V ± 20%,
 approx. 30 mA per relay,
 including LED
 Switched voltage 60V DC max.
 Switched current 1A max.
 Male connector DIN 41612, F48
 Mass 0,14 kg (0.3 lb)

Connection Diagram

EEA-REL-452-A-10

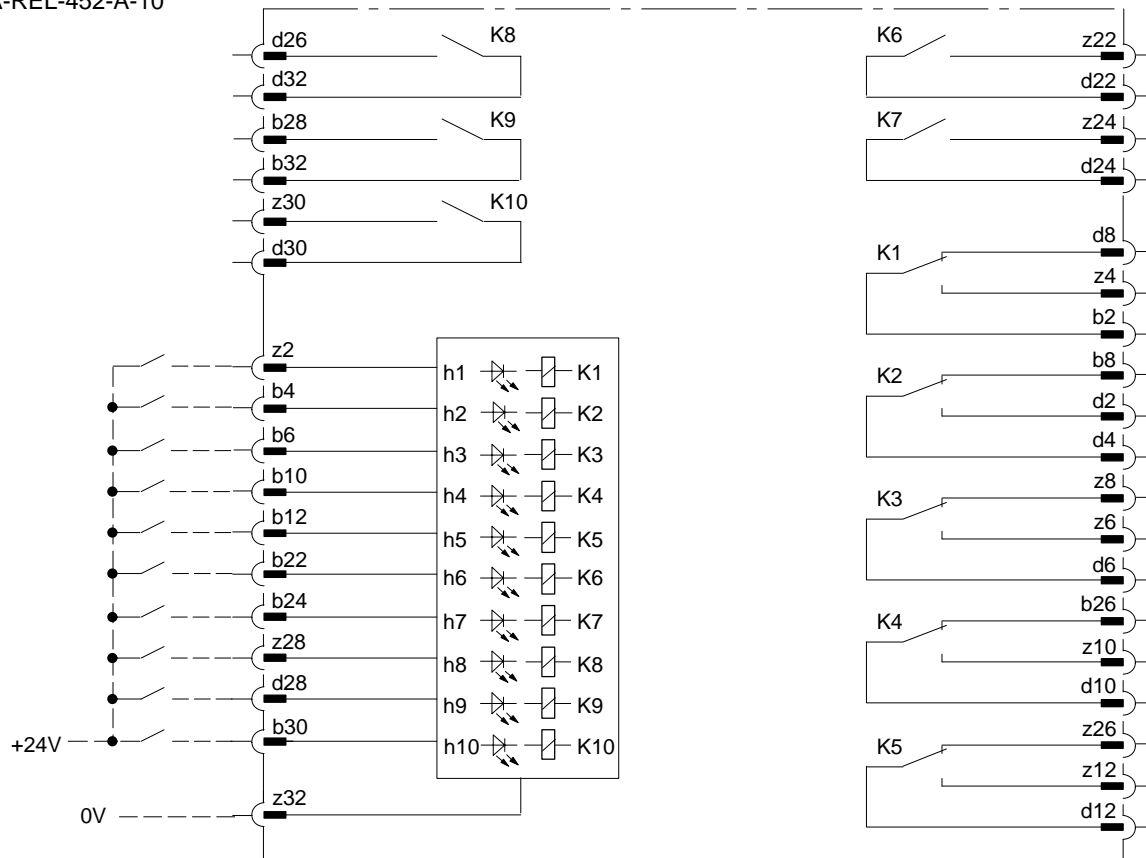

Warning: Electromagnetic Compatibility (EMC)

The European Community directives for electromagnetic compatibility (EMC) do not apply to this product.

Installation Dimensions in mm (inches)

3rd angle projection 

