


Single Type Pressure Relief Module

DGMC2-5-AB-*W-(E)-BA-*W-(E)-20

Model (A & B End)	"A" Spring	"B" Spring	Pressure Range		Relief Valve Kit
			bar	(PSI)	
DGMC2-5-AB-AW-(E)-BA-AW-(E)-20	681645	631770	5.2 - 35	(75-500)	926534
DGMC2-5-AB-BW-(E)-BA-BW-(E)-20	681646		8.5 - 70	(125-1000)	926535
DGMC2-5-AB-CW-(E)-BA-CW-(E)-20	681647		8.5 - 140	(125-2000)	926536
DGMC2-5-AB-FW-(E)-BA-FW-(E)-20	681648	688768	8.5 - 250	(125-3600)	926537

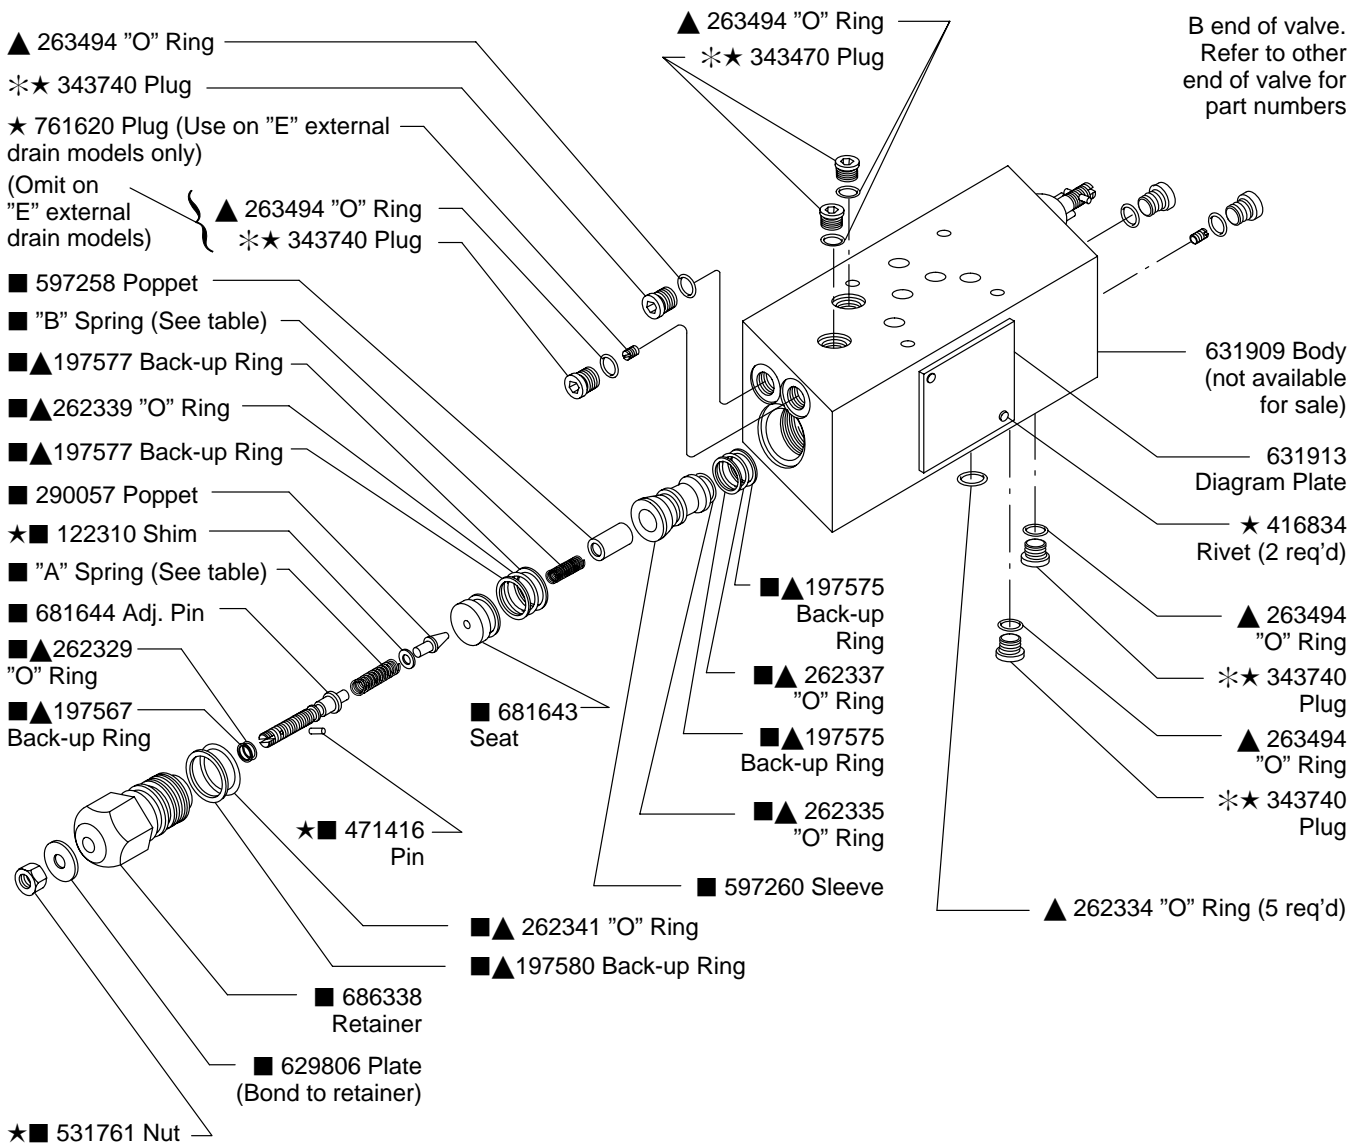

★ Available only in Kits of 25 each

▲ Included in F3 Seal Kit 920339

* Torque all 343740 Plugs to 15-16 N.m (11-12 lb. ft.)

Model Code

(F3) DGMC2 - 5 - A B - * W - (E) - B A - * W - (E) - 20

┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐ ┌───┐
└───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘ └───┘

1 2 3 4 5 6 7 8 9 10 11 12 13 14

1 Seal Material

F3 - Seals for mineral oil and fire resistant fluids

2 Model Series

DGMC - Directional valve, manifold or subplate mounted, module, pressure relief, crossport type

3 Interface

NFPA-D02
(ISO 4401-05)

4 Port Acted Upon

A - Cylinder 'A'

5 Drain Port

B - Cylinder 'B'

6 Pressure Range (Cyl. 'A')

Bar	PSI
A - 5.2-35	(75-500)
B - 8.5-70	(125-1000)
C - 8.5-140	(125-2000)
F - 8.5-250	(125-3600)

7 Screw & Locknut Adjustment

8 Drain

E - External drain
(Omit for standard internal drain)

9 Port Acted Upon

B - Cylinder 'B'

10 Drain Port

A - Cylinder 'A'

11 Pressure Range (Cyl. 'B')

Bar	PSI
A - 5.2-35	(75-500)
B - 8.5-70	(125-1000)
C - 8.5-140	(125-2000)
F - 8.5-250	(125-3600)

12 Screw & Locknut Adjustment

13 Drain

E - External drain
(Omit for standard internal drain)

14 Design

