


Pressure Controls



Pressure Reducing Valves

X(C)G-H06-**-30

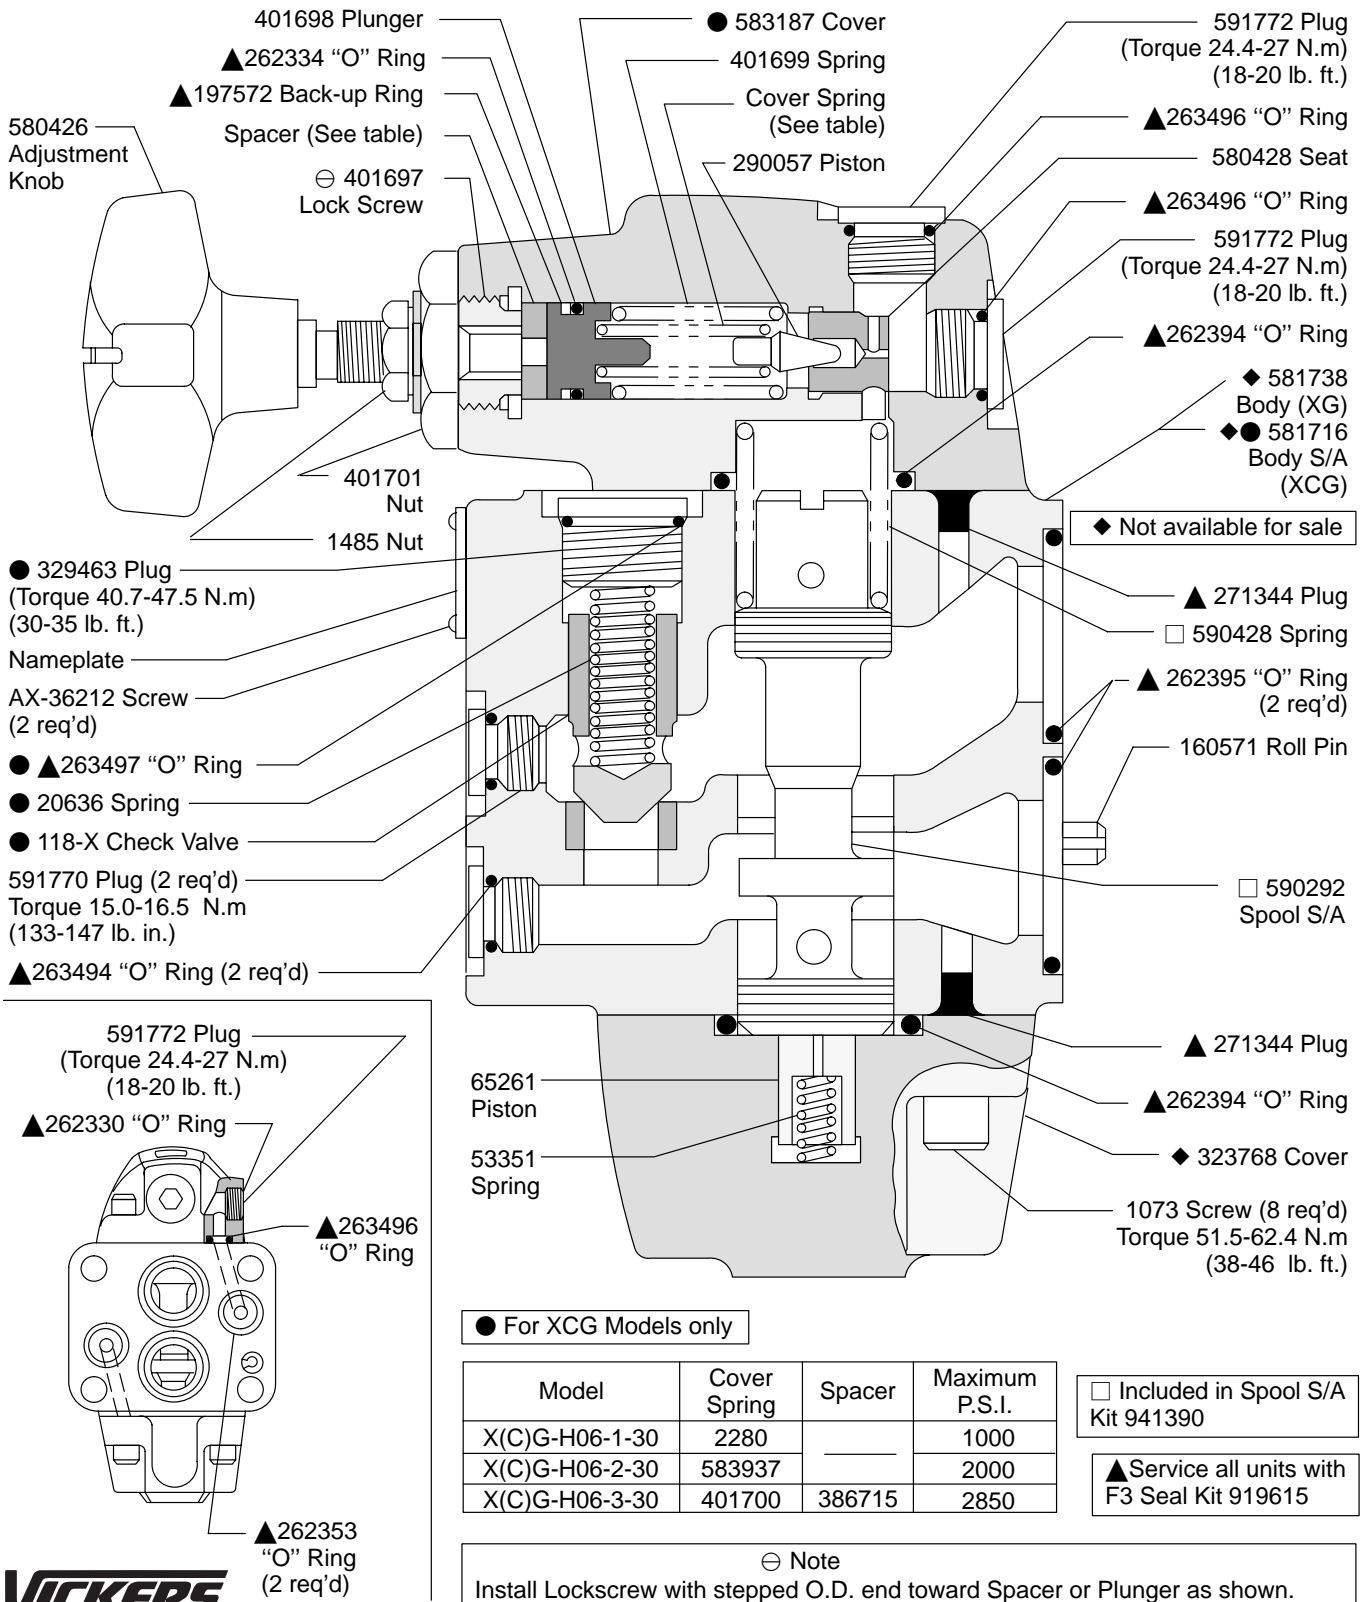

● For XCG Models only

Model	Cover Spring	Spacer	Maximum P.S.I.
X(C)G-H06-1-30	2280		1000
X(C)G-H06-2-30	583937		2000
X(C)G-H06-3-30	401700	386715	2850

□ Included in Spool S/A Kit 941390


▲ Service all units with F3 Seal Kit 919615

⊖ Note
Install Lockscrew with stepped O.D. end toward Spacer or Plunger as shown.



Model Code

(F3) - X (C) G - H 0 6 - * - 30



1 Seal Material

F3 - Seals for mineral oil and fire resistant fluids

3 High Flow

70 USGPM

5 Maximum Adjustable Pressure

1 - 1000 PSI

2 - 2000 PSI

3 - 2850 PSI

2 Model Series

XC - Pressure reducing valve, integral check valve

4 Nominal Valve Size

3/4 inch

6 Design

Mount Type

G - Manifold of subplate mounted