


Heating and Coolant Systems

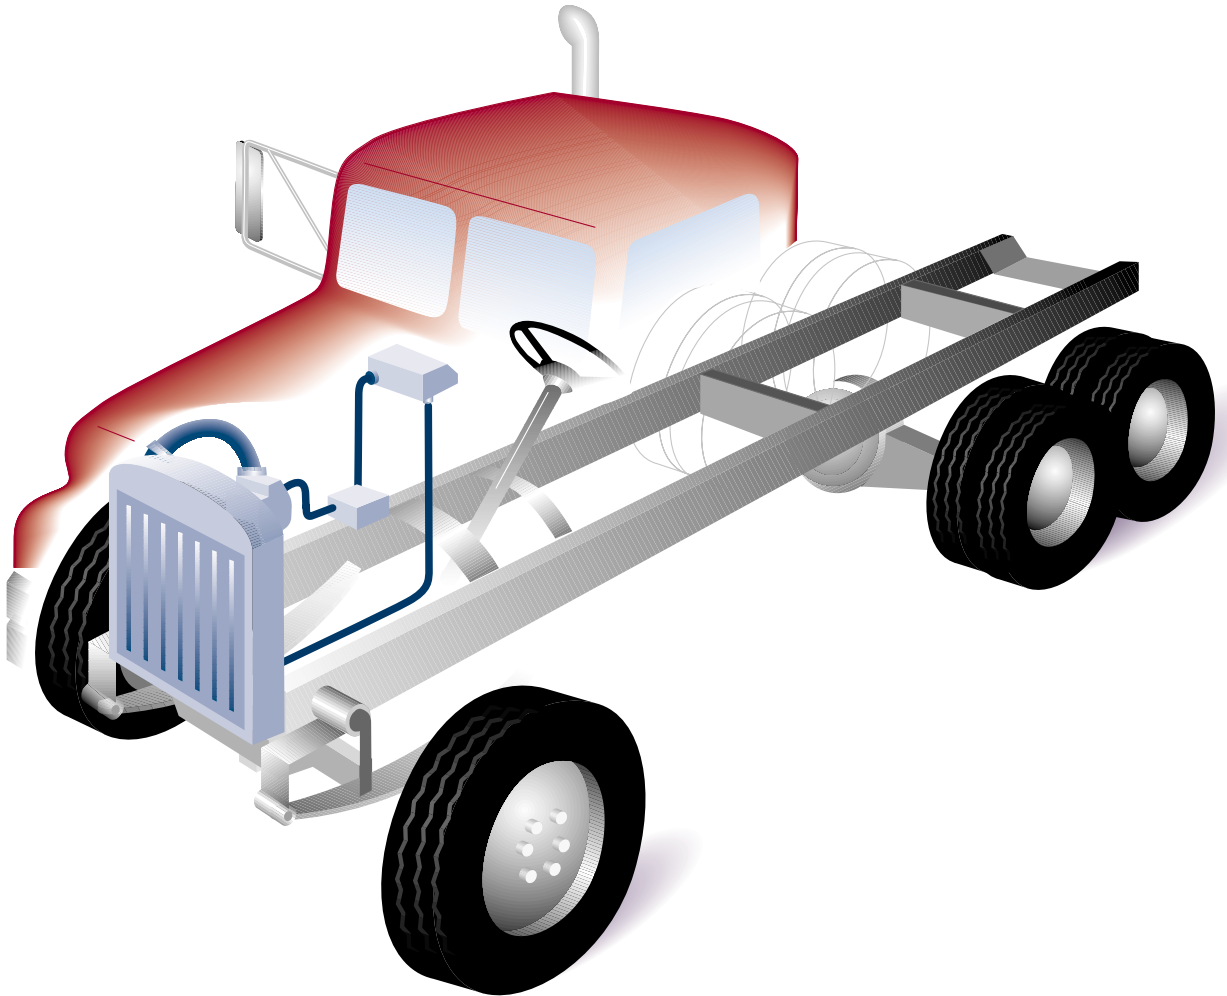

FC352 Silicone Coolant Hose

Features:

- Silicone rubber tube and cover
- Four-spiral nylon reinforcement
- Industry standard band clamps and couplings

Benefits:

- Superior temperature range for extended operating performance (-65°F to +350°F / -54°C to +177°C)
- Heat stabilized for extended service life
- Ease of installation and field service

Aeroquip FC352

Silicone Rubber Coolant Hose



Specifications and Performance:

| Part Number | Hose I.D. (mm/inch) | Hose O.D. (mm/inch) | Max. Oper. Press. (Bar/psi) | Min. Burst Press. (Bar/psi) |
|-------------|------------------------|------------------------|--------------------------------|--------------------------------|
| FC352-08 | 12.7/.50 | 23.9/.94 | 6.9/100 | 29.3/425 |
| FC352-10 | 15.9/.62 | 26.9/1.06 | 6.9/100 | 29.3/425 |
| FC352-12 | 19.1/.75 | 30.2/1.19 | 6.9/100 | 29.3/425 |
| FC352-14 | 22.2/.88 | 33.5/1.32 | 6.9/100 | 29.3/425 |
| FC352-16 | 25.4/1.00 | 36.6/1.44 | 6.2/90 | 25.9/375 |
| FC352-18 | 28.6/1.12 | 39.6/1.56 | 6.2/90 | 25.9/375 |
| FC352-20 | 31.8/1.25 | 42.9/1.69 | 5.9/85 | 24.1/350 |
| FC352-22 | 34.9/1.38 | 46.2/1.82 | 5.9/85 | 24.1/350 |
| FC352-24 | 38.1/1.50 | 49.3/1.94 | 5.9/85 | 24.1/350 |
| FC352-26 | 41.3/1.62 | 52.3/2.06 | 5.5/80 | 22.4/325 |
| FC352-28 | 44.5/1.75 | 55.6/2.19 | 5.5/80 | 22.4/325 |
| FC352-32 | 50.8/2.00 | 62.0/2.44 | 5.2/75 | 20.7/300 |
| FC352-36 | 57.2/2.25 | 68.3/2.69 | 5.2/75 | 20.7/300 |
| FC352-38 | 60.3/2.38 | 71.6/2.82 | 4.1/60 | 17.2/250 |
| FC352-40 | 63.5/2.50 | 74.7/2.94 | 4.1/60 | 17.2/250 |
| FC352-44 | 69.9/2.75 | 81.0/3.19 | 3.4/50 | 13.8/200 |
| FC352-48 | 76.2/3.00 | 87.4/3.44 | 3.4/50 | 13.8/200 |
| FC352-56 | 88.9/3.50 | 100.1/3.94 | 2.8/40 | 12.1/175 |
| FC352-64 | 101.6/4.00 | 112.8/4.44 | 2.4/35 | 10.3/150 |

Operating Temperature Range:

- -65°F to +350°F
(-54°C to +177°C)

Fittings:

- Silicone hose clamps



Eaton Aeroquip
 Industrial Division
 3000 Strayer Road, P.O. Box 631
 Maumee, Ohio 43537-0631
 419/867-2600, Fax: 419/867-2629
 www.aeroquip.com



Specifications subject to change without notice