

Equipment

Assortments

AB-8 & AB-9 Air Brake Air Chamber Hose



Assembly Assortment of 3/8" and 1/2" I.D. Lines

Each selection of fourteen ready-made air chamber hose assemblies facilitate replacement of hoses. Eliminates time and cost of making special assemblies. Wall rack keeps assemblies handy and ready to use.

AB-8 • 1/2" I.D. Air Brake Air Chamber Lines

LENGTH	QUANTITY	CATALOG NUMBER
18-1/2"	1	38353-01800
20-3/8"	1	38353-02037
24-1/8"	1	38353-02400
28-3/8"	1	38353-02837
30-1/8"	1	38353-03000
32"	1	38353-03200
34-3/8"	1	38353-03437
36-1/8"	1	38353-03600
41-1/8"	1	38353-04112
	1	AB-8X (rack only)

Replacement Labels: AB-8L

AB-9 • 3/8" I.D. Lines Air Brake Air Chamber Lines

LENGTH	QUANTITY	CATALOG NUMBER
18-1/2"	1	38166-01812
20-3/8"	2	38166-02137
24-1/8"	2	38166-02412
28-3/8"	2	38166-02837
30-1/8"	2	38166-03012
32"	1	38166-03200
34-3/8"	1	38166-03437
36-1/8"	2	38166-03612
41-1/8"	1	38166-04112
	1	AB-9X (rack only)

Replacement Labels: AB-9L

CA-130 & CA-230 Clamp Assortments



You can now increase your all-stainless steel or part-stainless steel clamp sales with these all-purpose clamp assortments. These rugged assortments can be wall mounted or stand free using less than 2 sq. ft. of counter space. They load easily and organize your merchandise effectively.

CA-130 Part-Stainless Steel

CATALOG NUMBER	QUANTITY
6205-004	20
6205-006	10
6203-010	20
6203-016	20
6203-020	20
6203-024	10
6203-036	10
CA-10X (rack only)	1

CA-230 All-Stainless Steel

CATALOG NUMBER	QUANTITY
6206-004	20
6206-006	10
6204-010	20
6204-016	20
6204-020	20
6204-024	10
6204-036	10
CA-10X (rack only)	1

APPLICATION
DATA

LOW & MEDIUM
PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY HOSE

ACCESSORIES &
ASSEMBLY INSTRUCTIONS

ADAPTERS & TUBE
HOSE ENDS

HOSE ASSEMBLY
EQUIPMENT

TECHNICAL DATA

Equipment

Assortments

RG-24 Hydraulic O-Ring Assortment



Weatherhead's RG-24 is your solution to storing a useful inventory of hydraulic o-rings. This kit contains o-rings for Weatherhead's straight thread and FOR-SEAL tube fitting applications as well as popular (code 61) split flange hydraulic applications. The RG-24 comes enclosed in a handy steel case with a

carrying handle. Consider an RG-24 for an over-the-counter sales merchandiser or keep one in your equipment shop or maintenance trailer to prepare for those critical "got-to-have-it" applications.


Twenty-four individual compartments keep your hydraulic o-ring inventory

separated by part number, and labelled illustrations on the inside of the assortment prevent the mix-up of o-rings. Compact, organized and reasonably priced, if you specialize in hydraulic applications which call for o-rings – we've got your number – RG-24.

RG-24 • O-Ring Assortment Contents

PART NUMBER	SPLIT FLANGE QUANTITY	PART NUMBER	FOR-SEAL QUANTITY	PART NUMBER	STRAIGHT THR. QUANTITY
8x252	12	4629x4	12	7629x4	12
12x252	12	4629x6	12	7629x5	12
16x252	12	4629x8	12	7629x6	12
20x252	12	4629x10	12	7629x8	12
24x252	12	4629x12	12	7629x10	12
32x252	12	4629x16	12	7629x12	12
		4629x20	12	7629x16	12
		4629x24	12	7629x20	12
				7629x24	12
				7629x32	12

FL-310 Fuel Hose and Fittings Assortment



FL-310 contains 250' of Weatherhead fuel line hose, a variety of brass hose end fittings, and gear-type clamps for easy, instant service on fuel and oil line assemblies.

A well-designed cabinet keeps 1/4", 5/16", 3/8", or 7/16" I.D. hose on reels free of kinks and tangles...

ready for instant use. Ten clear plastic drawers with color-coded illustrated labels are provided for storing hose end fittings and clamps. H057 hose is compatible with unleaded gasolines and low pressure fuel systems.

Size: 30" wide, 13-1/2" high, 13" deep

CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY
05704B-102	10	05706B-104	10
05704B-104	5	05706B-106	5
05704B-C02	5	05706B-1568	5
05705B-102	10	05706B-1570	5
05705B-104	10	05706B-C02	5
05705B-1560	5	05706B-C04	5
05705B-1561	5	6202	20
05705B-C02	5	CL-434	1
05705B-C04	5	FL-310X	1
05706B-102	10	H05704	100'
		H05705	100'
		H05706	50'

Equipment Assortments

SR3100W Weatherhead Air Conditioning Assortment



Air Conditioning Assortment Kit; containing the most popular steel air conditioning hose ends for use with H757 air conditioning hose.

Included in Kit: (various sizes)

- Bumped Tube O-Ring Male Swivels
- Bumped Tube O-Ring Male Swivel 90° Tube Elbows
- Bumped Tube O-Ring Female Swivels
- Bumped Tube O-Ring Female Swivel 90° Tube Elbows
- O-Ring Assortment
- Stackable Sturdy Steel Case (18" x 12" x 3")

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
75706E-Z47	4	75706E-Z87	4	75708E-Z08	4	ZW74706	4
75708E-Z49	4	75708E-Z89	4	75710E-Z10	4	ZW74708	4
75710E-Z51	4	75710E-Z91	4	75712E-Z12	4	ZW74710	4
75712E-Z51	4	75712E-Z91	4	75706E-Z66	4	ZW74712	4
75712E-Z53	4	75712E-Z93	4	75708E-Z68	4		
		75706E-Z06	4	75710E-Z70	4		

FF12139 E-Z Clip System™



The E-Z Clip System is designed for assembly with Weatherhead Multi-Refrigerant hose GH134. It's engineered connection exceeds SAE J2064 and has been vibration and impulse tested.

Kit Contents Components

PART NUMBER	DESCRIPTION	QTY/PER KIT
1F40104-size	Clips	20 each size
1F40105-size	Cages	10 each size
FT1357	Assy. Tool	1
T-135	Hose Cutter	1
T-135B	Replacement Blade	1

Note:

The E-Z Clip System has been designed to work exclusively with Weatherhead GH134W Hose.

BL-456 Barb-Tite Fittings and Hose Assortment



Making up an air line – oil line – transmission or power steering return line? The BL-456 assortment puts Eaton Barb-Tite fittings and 1/4", 5/16", and 3/8" I.D. 350 PSI maximum operating pressure H101 hose at your fingertips for quick and easy assembly. Simply push ends on hose, and you have a hose assembly. No clamps required!

Measure the hose on top of the cabinet with the rule provided and then select the proper hose ends from the assortment in the two metal drawers. Within minutes the hose assembly is ready for installation.

Size:

15" wide
16-1/2" high
13-3/16" deep
16 Compartments in each drawer.

CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY
10004B-102	4	10004B-B04	4	10005B-C02	4	10006B-606	4
10004B-104	4	10004B-B05	4	10005B-C04	4	10006B-B06	4
10004B-304	4	10004B-Y04	4	10005B-Y05	4	10006B-Y06	4
10004B-305	4	10005B-102	4	10006B-102	4	H10104	25'
10004B-405	4	10005B-104	4	10006B-104	4	H10105	25'
10004B-604	4	10005B-405	4	10006B-106	4	H10106	25'
10004B-A04	4	10005B-B05	4	10006B-306	4	FS-500	1
10004B-A05	4	10005B-B06	4	10006B-406	4	BL-456X	1
10004B-B03	4						

Equipment

Assortments

Fleet Hose and Fitting Assortment



These assortments are ideal for servicing that fleet account. The DOT-approved hose and fittings will enable the user to make


up chamber lines, connect to gladhand couplings, and provide routing for air brake lines. The general purpose H069 provides for fuel, oil,

water, power steering, and transmission lines. A self-contained assortment in a super cabinet, all set up for easy serviceability!

FA-100 • Fleet Hose and Fitting Assortment (with Cabinet) FA-100-CO • Fleet Hose and Fitting Assortment (Contents Only)

CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY
H06904	50'	24706N-106	5	24710N-608	5
H06906	50'	24706N-406	5	24710N-610	2
H06908	50'	24706N-604	5	33806-A	20
H06910	50'	24706N-605	5	33806-B	5
H16606	50'	24706N-606	5	33806B-Y06	5
H16608	50'	24706N-608	5	33806B-Y24	5
H33806	50'	24706N-756	5	33806B-Y26	2
24704N-102	5	24706N-B06	5	33806B-Y28	5
24704N-104	5	24708N-106	5	33806B-Y34	5
24704N-604	5	24708N-108	5	33806B-Y36	5
24704N-B04	5	24708N-406	5	33806B-Y38	5
24705N-104	5	24708N-608	5	FH-15X	1
24705N-605	5	24710B-Y58	2	HD-1X	1
24705N-B05	5	24710B-Y60	5		
24706N-104	5	24710N-108	5		

HA-574 Fuel Hose Merchandiser

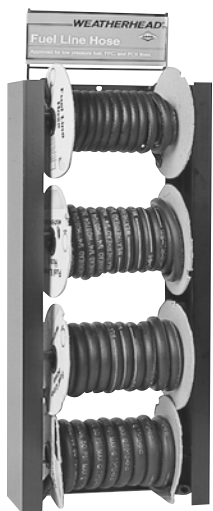

Now you can make those custom hose assemblies in minutes for instant service on fuel and oil line replacements. The attractive HA-574 includes H057 hose in all popular sizes for low

pressure fuel, EEC and PCV lines. Weatherhead H057 low pressure fuel line hose has Nitrile inner tube, fiber braid reinforcement, and Hypalon cover for long life compatibility with gasohol,

leaded and unleaded fuels. The HC-574X rack can be easily installed on pegboard, wall, or metal shelving with the included hardware.

CATALOG NUMBER	QUANTITY	DESCRIPTION
H05703	25'	Hose
H05704	25'	Hose
H05705	25'	Hose
H05706	25'	Hose
HC-574X	1	Rack + 4 Dowels

Equipment

Assortments

MA-100 • Metric Adapter Assortment

(with Cabinet)



The MA-100 is an ideal assortment to begin a metric adapter inventory. Offered are a variety of male British Standard Tapered Pipe and British Standard Parallel fittings in straight and 90° elbow configurations, sizes ranging from 1/8" through 1-1/4". Two male DIN (German metric) fittings adapt SAE fittings and hose ends to metric size tubing, and a

third DIN fitting connects SAE fittings with metric female swivel adapters, sizes ranging from 6mm through 42mm. The C5165X metric sleeves adapt metric tubing used with standard JIC fittings. The MA-100 is supplied with cabinet for accurate and easy access to your metric fittings.

Replacement Drawers:
PD-49 (one drawer)

Replacement Dividers:
PD-75 Set (25/set)

MA-100 Contents

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
7165X6MM	5	M9700X5X8	2	MC5205X4X2	5	MC5315X10X20	2	ML7105X8	5
7165X8MM	2	M9700X6X10	2	MC5205X4X4	5	MC5315X12X22	2	ML7105X10	5
7165X10MM	5	M9700X8X12	2	MC5205X5X4	5	MC5315X12X27	2	ML7105X12	5
7165X12MM	5	M9700X10X14	2	MC5205X6X4	5	MC5315X16X33	2	ML7105X15	5
7165X14MM	5	M9700X12X20	2	MC5205X6X6	5	MC5315X20X42	1	ML7105X18	5
7165X15MM	5	M9700X16X25	2	MC5205X8X6	5	MC5405X4X4	5	ML7105X22	5
7165X16MM	5	M9700X20X32	1	MC5205X8X8	5	MC5405X5X4	5	ML7105X28	5
7165X18MM	5	M9800X4X4	2	MC5205X10X8	5	MC5405X6X4	5	C5165X4X6MM	5
7165X20MM	5	M9800X5X4	2	MC5205X10X12	5	MC5405X6X6	5	C5165X5X8MM	5
7165X22MM	5	M9800X6X4	2	MC5205X12X12	5	MC5405X8X6	5	C5165X6X10MM	5
7165X25MM	5	M9800X8X4	2	MC5205X16X16	2	MC5405X8X8	5	C5165X8X12MM	5
7165X28MM	5	M9800X8X6	2	MC5205X20X20	2	MC5405X10X12	5	C5165X10X14MM	5
7165X30MM	5	M9800X8X8	2	MC5206X4X6	2	MC5405X12X12	5	C5165X10X15MM	5
M7629X10	5	M9800X10X8	2	MC5206X6X8	2	MC5405X16X16	2	C5165X10X16MM	5
M7629X14	5	M9800X12X8	2	MC5206X8X10	2	MC5405X20X20	2	C5165X12X18MM	5
M7629X16	5	M9800X12X12	2	MC5206X8X12	2	MC5515X4X12	2	C5165X14X20MM	5
M7629X18	5	M9800X16X12	2	MC5206X10X15	2	MC5515X6X14	2	C5165X16X25MM	5
M7629X20	5	M9800X16X16	2	MC5206X12X18	2	MC5515X6X16	2	C5165X20X30MM	5
M7629X22	5	M9800X20X20	1	MC5207X4X6	2	MC5515X8X18	2	C5165X20X32MM	5
M7629X27	5	MB5315X4X2	5	MC5207X6X8	2	MC5515X10X20	2	C-5X	1
M7629X33	5	MB5315X4X4	5	MC5207X6X10	2	MC5515X12X22	2	C-63X	1
M7629X42	5	MB5315X5X4	5	MC5207X8X12	2	MC5515X12X27	2	CL-502	1
M9600X4X4	2	MB5315X6X4	5	MC5207X10X15	2	MC5515X16X33	1	TA-1002	1
M9600X5X4	2	MB5315X6X6	5	MC5207X12X18	2	MH7105X6	5		
M9600X6X4	2	MB5315X8X6	5	MC5208X6X6	2	MH7105X8	5		
M9600X6X6	2	MB5515X6X4	5	MC5208X8X10	2	MH7105X10	5		
M9600X8X6	2	MB5515X6X6	5	MC5208X10X14	2	MH7105X12	5		
M9600X8X8	2	MB5515X8X6	5	MC5208X12X16	2	MH7105X14	5		
M9600X10X8	2	MB5515X8X8	5	MC5315X4X10	2	MH7105X16	5		
M9600X12X12	2	MB5515X10X12	5	MC5315X4X12	2	MH7105X20	5		
M9600X16X16	2	MB5515X12X12	5	MC5315X6X14	2	MH7105X25	5		
M9600X20X20	1	MB5515X16X16	2	MC5315X6X16	2	MH7105X30	5		
M9700X4X6	2	MB5515X20X20	2	MC5315X8X18	2	ML7105X6	5		

Equipment Assortments

MA-200 • Metric Hose End Assortment

(with Cabinet)



The MA-200 Hose End Assortment offers an excellent introductory stock of metric hose ends. Coverage includes 'U' Series British Standard Tapered Pipe (BSPT) and British Standard Parallel Pipe (BSPP) in male straight, and female swivel in straight and 90°

tube elbow connections, swivels, and split flange ends for Komatsu and Link Belt applications and DIN standpipe hose ends in light and heavy series. One FH-15X stock cabinet is supplied for storage.

MA-200 Contents

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
04U-14K	2	06U-76P	2	12U-162	2	16U-P66	2	MH7105X14	2
04U-154	5	08U-158	5	12U-30K	2	7165X8MM	5	MH7105X16	2
04U-354	5	08U-22K	2	12U-362	2	7165X10MM	4	MH7105X20	2
04U-38T	2	08U-358	5	12U-52T	2	7165X12MM	2	MH7105X25	2
04U-40T	2	08U-360	5	12U-55T	2	7165X14MM	2	MH7105X30	1
04U-P54	5	08U-45T	2	12U-G12	2	7165X15MM	2	ML7105X8	2
04U-74P	2	08U-46T	2	12U-G42	2	7165X16MM	2	ML7105X10	2
06U-156	5	08U-P56	2	12U-P62	2	7165X18MM	2	ML7105X12	2
06U-18K	2	08U-P58	2	12U-82P	2	7165X20MM	2	ML7105X15	2
06U-356	5	08U-78P	2	16U-166	2	7165X22MM	2	ML7105X18	2
06U-358	2	08U-80P	5	16U-33K	2	7165X25MM	2	ML7105X22	2
06U-40T	2	10U-24K	2	16U-366	2	7165X28MM	2	ML7105X28	2
06U-42T	2	10U-48T	2	16U-58T	2	7165X30MM	1	FH-15X	2
06U-44T	2	10U-50T	2	16U-60T	1	MH7105X8	2	FS-2500	1
06U-P56	2	10U-G09	2	16U-G16	2	MH7105X10	2		
06U-P58	2	10U-G69	2	16U-G46	2	MH7105X12	2		

FA-15 Portable Coll-O-Crimp Assortment (with Cabinet)



This portable assortment includes everything you need to service your hydraulic hose needs on the job site. Three sizes of 2 wire hose plus a variety of hose ends and adapters combined with a crimping system that requires no electrical power source makes this assortment the ultimate for field repairs. A 15-drawer cabinet is included for storage. Also available are assortments with a cut-off saw or less the equipment.

FA-15: Includes contents listed below.

FA-15-CO: Includes contents listed below less equipment and cabinet.

FA-15-NH: Includes contents listed below less hose.

FA-15-80: Includes contents listed below plus T-80 Saw.

FA-15 Contents

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
04U-102	5	06U-406	5	06U-J06	5	08U-612	5	9405X8X8	5
04U-104	10	06U-506	5	06U-J08	5	08U-668	5	FH-15X	1
04U-106	5	06U-508	5	06U-P08	5	08U-J08	5	H42504	50'
04U-604	10	06U-606	10	08U-106	5	08U-P08	5	H42506	50'
04U-605	5	06U-608	5	08U-108	10	08U-P10	5	H42508	50'
04U-606	5	06U-666	5	08U-112	5	9205X2X2	5	T-465-HPU	1
04U-B04	5	06U-668	5	08U-508	5	9205X4X4	5	FS-1100	1
04U-J04	5	06U-755	5	08U-510	5	9205X6X6	5	FS-100	1
06U-104	10	06U-756	5	08U-512	5	9205X8X8	5		
06U-106	10	06U-B06	5	08U-608	10	9405X4X4	5		
06U-108	5	06U-B66	5	08U-610	5	9405X6X6	5		

Equipment Assortments

FA-135 Coll-O-Crimp I Assortment

(with Cabinet)



This assortment includes everything you need to start servicing hydraulic hose applications in your own shop. Five sizes of 2 wire hose along with a variety of hose ends and adapters gives you the versatility you need. In addition there is hose for power steering applications and a cabinet for storage. Also available are assortments with a cut-off saw or less the equipment.

FA-135: Includes contents listed below.

FA-135-CO: Includes contents listed below less equipment and cabinet.

FA-135-NH: Includes contents listed below less hose.

FA-135-10B: Includes contents listed below plus T-10B Saw.

FA-135 Contents


CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY	CATALOG NUMBER	QUANTITY
04U-102	5	06U-J08	5	12U-P12	5
04U-104	10	06U-P06	5	16U-116	5
04U-106	5	06U-P08	5	16U-516	2
04U-504	5	08U-058	5	16U-616	5
04U-505	5	08U-106	5	16U-676	1
04U-506	5	08U-108	10	16U-J16	1
04U-604	10	08U-112	5	41157X6	5
04U-605	5	08U-208	2	9205X2X2	5
04U-606	5	08U-508	5	9205X4X4	5
04U-664	5	08U-510	5	9205X6X6	5
04U-B04	5	08U-512	5	9205X6X8	5
04U-J04	5	08U-608	10	9205X8X6	5
06U-104	10	08U-610	5	9205X8X8	5
06U-106	10	08U-612	5	9405X4X4	5
06U-108	5	08U-668	5	9405X6X6	5
06U-206	5	08U-670	5	9405X8X8	5
06U-406	5	08U-758	5	9405X12X12	2
06U-446	5	08U-760	5	C5205X4X4	2
06U-506	5	08U-J08	5	C5205X6	4
06U-508	5	08U-P08	5	C5205X6X6	4
06U-606	10	08U-P10	5	C5205X8	4
06U-608	5	08U-R70	5	C5205X10	2
06U-610	5	12U-112	10	FH-135X	1
06U-666	5	12U-116	2	FS-1100	1
06U-668	5	12U-412	5	FS-100	1
06U-686	5	12U-512	5	FS-200	1
06U-755	5	12U-514	2	H32406	50'
06U-756	5	12U-516	2	H42504	50'
06U-B05	5	12U-610	5	H42506	50'
06U-B06	5	12U-612	10	H42508	50'
06U-B46	5	12U-614	5	H42512	50'
06U-B66	5	12U-616	2	H42516	50'
06U-J04	5	12U-672	2	T-401	1
06U-J06	5	12U-J12	5		

Equipment

Assortments

CA-50 Coll-O-Crimp Super I Assortment

(with Cabinet)



The CA-50 assortment includes everything you need to service your larger hydraulic applications. Five sizes of 2 wire hose and four sizes of 4 wire hose combined with a variety of hose ends and adapters gives you the coverage you need. Included with this assortment is a 40-drawer cabinet for mounting your press and storage. Also available are assortments with a cut-off saw or less the equipment.

CA-50: Includes contents listed below.

CA-50-CO: Includes contents listed below less equipment and cabinet.

CA-50-NH: Includes contents listed below less hose.

CA-50-60A: Includes contents listed below plus T-60A Saw.

CA-50 Contents

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
04U-102	5	08U-512	5	43012U-G12	1	C5205X4	4
04U-104	10	08U-608	10	43012U-G42	1	C5205X4X4	2
04U-106	5	08U-610	5	43012U-G72	1	C5205X6	4
04U-504	5	08U-612	5	43016U-116	2	C5205X6X6	4
04U-506	5	08U-668	5	43016U-616	2	C5205X8	4
04U-604	10	08U-670	5	43016U-G16	1	C5205X8X8	4
04U-605	5	08U-688	5	43016U-G46	1	C5205X10	2
04U-606	5	08U-758	5	43016U-G76	1	C5205X12	2
04U-664	5	08U-760	5	43020U-120	1	C5205X16	1
04U-B04	5	08U-J08	5	43020U-620	1	C5315X8	1
04U-J04	5	08U-P08	5	43020U-G20	1	C5405X6	2
06U-104	10	08U-P10	5	43020U-G50	1	C5405X6X6	2
06U-106	10	12U-112	10	43020U-G80	1	C5405X8	2
06U-108	5	12U-116	2	9205X2X2	5	C5405X8X8	2
06U-406	5	12U-412	5	9205X4X4	5	C5405X10	1
06U-506	5	12U-512	5	9205X6X6	5	C5515X8	1
06U-508	5	12U-610	5	9205X6X8	5	H24504	50'
06U-604	5	12U-612	10	9205X8X6	5	H24506	50'
06U-606	10	12U-614	5	9205X8X8	5	H24508	50'
06U-608	5	12U-616	2	9205X12X12	2	H24512	50'
06U-610	5	12U-672	2	9205X16X16	1	H24516	50'
06U-666	5	12U-692	2	9405X4X4	5	H43008	50'
06U-668	5	12U-J12	5	9405X6X6	5	H43012	50'
06U-755	5	16U-116	5	9405X8X8	5	H43016	50'
06U-756	5	16U-516	2	9405X12X12	2	H43020	50'
06U-B06	5	16U-616	5	9405X16X16	1	T-420-N	1
06U-B66	5	16U-676	1	C-40X	1	FS-1100	1
06U-J06	5	16U-J16	1	C5105X4	2	FS-100	1
06U-J08	5	43008U-108	2	C5105X6	2	FS-200	1
06U-P08	5	43008U-608	2	C5105X8	2	FS-3100	1
08U-106	5	43008U-G08	1	C5105X12	1		
08U-108	10	43008U-G41	1	C5165X4	10		
08U-112	5	43008U-G71	1	C5165X6	10		
08U-508	5	43012U-112	2	C5165X8	10		
08U-510	5	43012U-612	2	C5165X12	5		

Equipment

Assortments

TA-1002 Thread Measuring Kit



Measuring tube and pipe fitting threads can be a most difficult task if not completely understood. Tools needed include a thread pitch gauge, calipers and seat angle gauges. To aid you, Eaton has a kit to fit your needs, the TA-1002 thread measuring kit.

This handy kit includes:

- Thread Pitch Gauge (Imperial and metric)
- Inside/Outside Caliper (inches and millimeters)
- 2 Seat Angle Gauges (37°/45° and a 12°/30°)
- How to Identify Fluid Ports and Connectors bulletin
- Carrying Case for Easy Convenient and Storage

Weight: .5 lb.

TA-1004 Metric Thread Identification Kit



Contained in a durable steel carrying case, TA-1004 will help you with identification of metric, British pipe and JIS thread configurations. Identification pieces are configured for 20 metric and 8 British pipe sizes.

This handy kit includes:

- Steel Carrying Case
- Stainless Steel Caliper
- Metric and British Thread Pitch Gauges
- British Thread Measuring Templates (4 measuring 8 sizes) made of durable aircraft grade aluminum.
- Metric Thread Measuring Templates (10 measuring 20 sizes) made of durable aircraft grade aluminum.
- Kit Content Identification Chart

Equipment Assortments

SS-85 • Standard Brass Fittings Assortment



Instant service for service stations, car dealers, repair shops. Contains 85 of the fastest moving Weatherhead brass fittings.

Compact, lightweight plastic box stores easily in a drawer, shelf or service truck. Saves you time and money by having the right fitting when it is needed. Eliminates searching and make-shift repairs by giving you the right part when you need it most.

Size: 11" wide, 1-3/4" high, 6-3/4" deep. **WEIGHT:** 3-1/4 lbs.

CATALOG NUMBER	QTY.
105x3	5
105x4	5
105x5	10
202x4	5
202x5	5
3151x2	2
3220x4x2	5
3300x2	5
402x4	2
60x3	5
60x4	10

CATALOG NUMBER	QTY.
60x5	5
60x6	5
62x3	2
62x4	5
62x5	5
62x6	2
68x4	2
BF-40X	1)

SS-86 • Compression Fittings Assortment



Assortment contains 80 of the fastest moving compression fittings.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

Weight: 3-1/2 lbs.

CATALOG NUMBER	QTY.
60x3	5
60x4	10
60x5	5
60x6	5
61x3	5
61x4	5
61x5	5
61x6	5
62x3	5

CATALOG NUMBER	QTY.
62x4	5
62x5	5
62x6	2
68x3	2
68x4	5
68x5	2
69x3	2
69x4	5
69x5	2
BF-40X	1

SS-87 • Inverted Flare Assortment



Assortment contains 84 of the fastest moving inverted fittings.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

Weight: 3-1/2 lbs.

CATALOG NUMBER	QTY.
105x3	5
105x4	5
105x5	5
105x6	5
202x3	5
202x4	5
202x5	5
202x6	2
302x3	5

CATALOG NUMBER	QTY.
302x4	5
302x5	5
302x6	2
402x3	5
402x4	5
402x5	5
402x6	5
7896x3	5
7896x4	5
BF-40X	1

Equipment

Assortments

SS-88 • Brass Pipe Assortment



Assortment contains 59 of the fastest moving brass pipe fittings.

Size: 11" wide, 1-3/4" high, 6-3/4" deep. **WEIGHT:** 3-1/2 lbs.

CATALOG NUMBER	QTY.
3152x2	5
3152x4	5
3152x6	2
3220x4x2	2
3220x6x4	2
3300x2	5
3300x4	2
3326x2	5
3326x4	5

CATALOG NUMBER	QTY.
3326x6	2
3350x2	5
3350x4	4
3350x6	2
3400x2	5
3400x4	2
3400x6	2
3500x2	2
3500x4	2
BF-40X	1

BF-40 • Hydraulic Brake Fittings Assortment



The BF-40 assortment of fast moving hydraulic brake fittings is a must for any shop doing brake service work. Contains the adapters needed to convert large size ports in master cylinders to accept standard steel brake lines plus the brass tees used in the installation of electric towed trailer brakes.

Assortment is organized in a compact, handy plastic box for easy selection.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

Weight: 4 lbs. (approx.)

CATALOG NUMBER	QTY.
7818	2
7828	2
7829	2
7897	2
7898	2
7900	2
7901	2
7904	2
7905	2

CATALOG NUMBER	QTY.
7906	2
7908	2
7910	2
7911	2
7912	2
7913	2
7914	2
7917	2
7933	2
BF-40X	1

BF-41 • Hydraulic Brake Line Adapter Assortment



The BF-41 assortment contains the adapters needed to convert the oversize master cylinder ports to accept the inverted flare nut used on standard replacement steel brake lines. The adapters eliminate the need to cut line, install oversize nut and double flare tubing as well as converting the port to standard size threads for the life of the car. Extra standard nuts and the unions needed to connect two steel brake lines when a non-standard length is required are also included in the assortment. The contents including the illustrations of parts are shown on the inside cover of the box.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

Weight: 4 lbs. (approx.)

CATALOG NUMBER	QTY.
105x3	10
105x4	10
105x5	10
105x6	5
105x6x7	2
302x3	5
302x4	5
302x5	5
302x6	2

CATALOG NUMBER	QTY.
7818	2
7828	2
7829	2
7896x3	5
7896x4	5
7897	2
7908	2
7917	2
BF-40X	1

APPLICATION DATA

LOW & MEDIUM PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY HOSE

ACCESSORIES & ASSEMBLY INSTRUCTIONS

ADAPTERS & TUBE HOSE ENDS

HOSE ASSEMBLY EQUIPMENT

TECHNICAL DATA

Equipment Assortments

BF-42 • RV Brake Line Adapter Assortment



The BF-42 assortment contains the adapter tees required to install the control switch used to coordinate the electric trailer brakes with the hydraulic brakes on towing vehicle. The assortment also contains inverted brake line nuts and unions needed to make up non-standard steel brake line lengths.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

Weight: 4 lbs.

CATALOG NUMBER	QTY.
105x3	10
105x4	10
105x5	10
105x6	5
105x6x7	2
302x3	5
302x4	5
302x5	5
7898	1

CATALOG NUMBER	QTY.
7900	1
7901	1
7904	1
7905	1
7906	1
7914	1
7921	1
7933	1
BF-40X	1

BF-43 • Metric Adapter and Tee Assortment



The BF-43 assortment contains metric thread connectors to adapt the three port sizes in late model GM cars to use a steel brake line with metric threads (M10x1.0) and standard flare (Weatherhead J series). Included as well are metric adapters to convert European Bubble flare type ports to accept standard 3/16" U.S. steel brake lines, and metric towed trailer brake tees used in controls of electric trailer brakes. The 3/16" unions are used for joining metric and U.S. steel brake lines to make up non-standard lengths.

Size: 11" wide, 1-3/4" high, 6-3/4" deep.

CATALOG NUMBER	QTY.
105x3	10
105x4	5
1442	5
1443	5
302x3	5
7921	1
7934A	5
7935	1
7936	1

CATALOG NUMBER	QTY.
7937	1
7940	5
7941	5
7970	2
7972	1
7974	1
7975	1
7896x3	5
7896x4	5
BF-40X	1

Equipment

Assortments

DC-121 • Plastic Drain Cock Assortment



To address your plastic drain cock needs, Weatherhead now offers a full assortment of domestic and offshore drain cocks. This kit comes complete with a plastic box and a label with part number and application information.

CATALOG NUMBER	QTY.
110	2
111	2
112	2
113	2
114	2
115	2
116	2
117	2
135	2
145	2

PC-48 • Push Connect Fittings Assortment



Weatherhead PUSH > CONNECT fittings are designed for quick assembly without the need for a wrench. Ideal for pneumatic applications where space is tight. Then fittings are also easily disconnected; simply depress the collet ring with two fingers and withdraw the tube. The PC-48 provides the 48 most popular PUSH > CONNECT fittings in a compact, handy plastic box to make your assortment organized and accessible.

CATALOG NUMBER	QTY.	CATALOG NUMBER	QTY.
1162x2	5	1168x6	5
1162x4	5	1168x6x6	5
1162x6	5	1168x6x8	2
1164x2.5	5	1168x8	5
1164x4	5	1168x8x8	2
1164x6	5	1169x2.5S	5
1164x8	2	1169x2S	5
1165x2.5	5	1169x2x4S	5
1165x4	5	1169x4S	5
1165x6	5	1169x4x4S	5
1165x8	2	1169x4x6S	5
1166x4	5	1169x6S	5
1166x4x4	5	1169x6x6S	5
1166x6	5	1169x8S	2
1166x6x6	2	1169x8x4S	2
1168x2	2	1171x4S	5
1168x2.5	5	1171x4x4S	5
1168x2.5A	5	1171x6S	5
1168x2.5x4	5	1172x4S	5
1168x2x4	5	1172x4x4S	5
1168x4	5	1174x2	5
1168x4A	5	1174x4	5
1168x4x4	5	CL-499	1
1168x4x6	5	FC-16X	1
1168x5	5		
1168x5x4	5		

Equipment

Assortments

BA-84 • Steel Brake Line Assortment



The BA-84 attractive lobby merchandiser displays domestic as well as import car (British, European and Japanese) steel brake lines. The BA-84 puts brake lines where users can make fast and easy selection from a complete inventory protected by sturdy cardboard color-coded tubes.

The corrosion and vibration resistant double wall steel brake lines are easily formed into the configurations you need without kinking. Longer or non-standard lengths can be made up by joining two lines with a Weatherhead union of the proper thread size.

The BA-84 includes all sizes of the 3/16", 1/4" and 5/16" Weatherhead steel brake lines for domestic cars and trucks plus a sturdy steel rack. Order the SB series (Jaguar, M.G., Triumph), SC series (BMW, Mercedes, Peugeot, Porsche, Volkswagen), SJ series (Mazda, Nissan, Toyota) and Weatherhead import car steel brake lines and unions from listings in brake line section of this catalog. See page 128.

Increase your sales
— Organize your inventory
— Make selections easy
— Discover the results of putting this proven money maker to work for you
— Install a BA-84 NOW.

LENGTH	CATALOG NUMBER	QTY.
3/16" LINES		
6"	S306	4
8"	S308	4
12"	S312	4
20"	S320	4
30"	S330	4
40"	S340	4
51"	S351	4
60"	S360	4
72"	S372	4
1/4" LINES		
12"	S412	4
20"	S420	4
30"	S430	4
40"	S440	4
51"	S451	4
60"	S460	4
5/16" LINES		
12"	S512	4
20"	S520	4
30"	S530	4
40"	S540	4
51"	S551	4
60"	S560	4
Rack	BA-84X	1

Equipment Assortments



BA-24 • Steel Brake Line Assortment

The BA-24 assortment includes an assortment of 5/16" steel brake lines and a rack for wall or bin installation. The multi-walled corrosion resistant tubing can be easily formed for time saving installation. All lines have color-coded label attached for easy identification. Non-standard lengths can be made up by joining two standard lengths with a 302x5 union.

Weight: 6 lbs.

BA-28 • Steel Brake Line Assortment

BA-28 contains 3/16" easy to form, anti-corrosive, multi-walled steel brake lines for Japanese vehicles. The SJ lines with 10-1.0mm threads (standard flare) can be joined to form longer lines by using the 7934A Japanese metric union. The handy wall rack is included.

BA-38 • Steel Brake Line Assortment

BA-38 contains six different lengths made of 3/8" multi-walled, easily formed, anti-corrosive steel tubing with inverted flare nuts attached. All lines have color-coded label for easy identification. Non-standard length lines may be fabricated by joining two 3/8" steel lines with a 302x6 union.

Weight: 8 lbs.

BA-48 • Steel Brake Line Assortment

BA-48 contains the most popular steel brake lines and an easy to install rack. The 3/16" and 1/4" steel brake lines are available in six different lengths. Each steel brake line has a standard inverted flare nut on one end and a long thread inverted flare nut on the other end for better sealing. Easy to form, multi-walled steel tubing resists corrosion and vibration.


Non-standard length lines may be fabricated by joining two 3/16" lines with a 302x3 and two 1/4" lines with a 302x4.

Weight: 10-1/2 lbs.

BA-56 • Steel Brake Line Assortment

BA-56 contains 3/16" easy to form, anti-corrosive, multi-walled steel brake lines for British and European cars. The SB lines with 3/8-24 threads (Bubble Flare) can be joined to form longer lines by using the 7940 metric union. SC lines with 10X1.0mm threads (Bubble Flare) can be joined with the 7941 metric union. The handy wall rack is included.

Weight: 10 lbs.

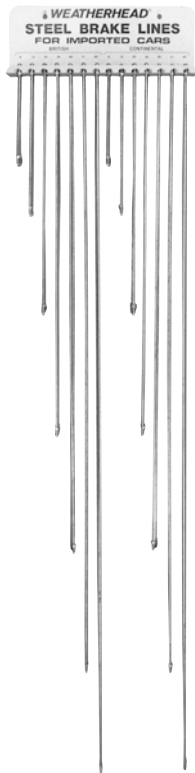

LENGTH	CATALOG NUMBER	QTY.
British 3/8-24 Thread		
8"	SB308	4
12"	SB312	4
20"	SB320	4
30"	SB330	4
40"	SB340	4
51"	SB351	4
60"	SB360	4

LENGTH	CATALOG NUMBER	QTY.
12"	S512	4
20"	S520	4
30"	S530	4
40"	S540	4
51"	S551	4
60"	S560	4
Rack	BA-24X	1

LENGTH	CATALOG NUMBER	QTY.
8"	SJ308	4
12"	SJ312	4
20"	SJ320	4
30"	SJ330	4
40"	SJ340	4
51"	SJ351	4
60"	SJ360	4
Rack	BA-28X	1

LENGTH	CATALOG NUMBER	QTY.
12"	S612	4
20"	S620	4
30"	S630	4
40"	S640	4
51"	S651	4
60"	S660	4
Rack	BA-38X	1

LENGTH	CATALOG NUMBER	QTY.
3/16" LINES		
12"	S312	4
20"	S320	4
30"	S330	4
40"	S340	4
51"	S351	4
60"	S360	4

LENGTH	CATALOG NUMBER	QTY.
1/4" LINES		
12"	S412	4
20"	S420	4
30"	S430	4
40"	S440	4
51"	S451	4
60"	S460	4
Rack	BA-48X	1

LENGTH	CATALOG NUMBER	QTY.
European 10-1.0mm Thread		
8"	SC308	4
12"	SC312	4
20"	SC320	4
30"	SC330	4
40"	SC340	4
51"	SC351	4
60"	SC360	4
Rack	BA-56X	1

Equipment

Assortments

AB-1400 • Air Brake Fittings Assortment



The AB-1400 contains DOT approved brass air brake fittings for servicing nylon air brake and secondary air lines. Selecting the proper fittings from the 63 drawer cabinet included with assortment is easy. Clear, wide plastic drawers with color-coded labels make identification of shapes and sizes quick and simple. Order Weatherhead NT100 nylon air brake tubing to complete your nylon air brake line service center.

CATALOG NUMBER	QTY.
1460x4	10
1460x6	20
1460x8	10
1460x10	10
1460x12	10
1461x4	5
1461x6	10
1461x8	5
1461x10	5
1461x12	5
1462x4	5
1462x6	10
1462x8	5
1462x10	4
1462x12	2
1464x6	5
1464x8	5
1466x6	5
1466x6x6	5
1466x8	5
1468x4	5
1468x4x4	5
1468x6	10
1468x6x2	5
1468x8	5
1468x10	5
1468x12	4
1469x4	5

CATALOG NUMBER	QTY.
1469x4x4	5
1469x6	10
1469x6L	5
1469x6x2	5
1469x6x6	5
1469x8	5
1469x8x4	5
1469x10	5
1469x10x6	4
1469x12	4
1471x4	5
1471x6	5
1472x6	5
1472x8	5
1480x6	5
1480x6x6	5
1480x8	5
1480x10	4
1484x4	20
1484x6	20
1484x8	20
1484x10	10
1484x12	10
C-63X	1
CL-497	1

AB-140 • 1400 Series Air Brake Fittings Assortment



This assortment of 1/4", 3/8", 1/2" air brake fittings designed for use with NT100 nylon air brake tubing provides the coverage needed for service work by fleets, repair shops and farm implement dealers. The DOT approved air brake fittings are easily selected from the cabinet with 16 plastic drawers and color-coded labels included in the assortment.

CATALOG NUMBER	QTY.
1460x4	20
1460x6	20
1460x8	20
1461x4	10
1461x6	10
1461x8	5
1462x4	5
1462x6	10
1462x8	4
1468x4	10
1468x6	10
1468x8	5
1469x4	5
1469x6	5

CATALOG NUMBER	QTY.
1469x8	5
1484x4	20
1484x6	20
1484x8	20
145	10
CL-16-3	1
FC-16X	1
W15310	5

Equipment Assortments

QC-18



Designed as a glove box sized emergency repair kit, the QC-18 assortment contains Q-CAB® tube unions in 5/32", 3/16", 1/4", 3/8" and 1/2" sizes, also included is a T-191 tubing cutter. The contents are contained in a convenient carrying case measuring 1-1/4"x3-3/4"x7".

COMPONENT

PART NO.	QTY.
1862x2.5	2
1862x3	2
1862x4	2
1862x6	2
1862x8	2
T-191	1
QC-18X	1

QC-180



The QC180 contains tube unions, male connectors, swivel male 45° elbow, male 90° elbows and repair kits in popular 1/4", 3/8" and 1/2" tube sizes designed for D.O.T. Truck and Trailer Air Brake System needs (see complete listing below). The Q-CAB® fittings are field proven with over millions of miles of leak free performance. Their design can save up to 75% of the assembly time over conventional compression fittings. These fittings are contained in a case measuring 1-3/4"x6-3/4"x1-3/4".

COMPONENT

PART NO.	QTY.
1862x3	2
1869x6x6	2
1862x4	2
1869x8x8	1
1862x6	2
1880x4x4	2
1862x8	2
1880x6x6	2
1868x2.5	2
1880x8x8	1
1868x3	2
1800Kx4	2
1868x4x4	2
1800Kx6	2

COMPONENT

PART NO.	QTY.
1868x6x6	2
1800Kx8	2
1868x8x8	2
1800TRK	1
1869x4x4	2
BF-40X	1

QC-1800



This assortment contains a solid inventory of popular Weatherhead Q-CAB® fittings designed for D.O.T. Truck and Trailer Air Brake System needs (see complete listing below). The Q-CAB® fittings are field proven with over millions of of leak free performance. Their design can save up to 75% of the assembly time over conventional compression fittings.

COMPONENT

PART NO.	QTY.
1800Kx2.5	4
1862x10	2
1868x12	2
1874x6x6	1
1800Kx3	4
1868x2.5x1	5
1869x4	5
1874x8x8	1
1800Kx4	4
1868x2.5	5
1869x4x4	5
1880x4x4	5
1800Kx6	4
1868x3	5
1869x6	5
1880x6x6	5
1800Kx8	4
1868x4	5
1869x8	5
1880x8x8	5
1800Kx10	2
1868x4x4	5
1869x8x8	5
1880x10	2

COMPONENT

PART NO.	QTY.
1800Kx12	2
1868x6	5
1869x10	2
1880x12	2
1862x2.5	2
1868x6x6	5
1869x4S	5
1800T	1
1862x3	5
1868x8	5
1869x4x4S	5
CL-503	1
1862x4	5
1868x8x8	5
1869x6S	5
FC-16X	1
1862x6	5
1868x10x6	2
1869x8S	5
T-191	1
1862x8	5
1868x10	2
1874x4x4	1

Equipment

Assortments

AB-45 • Air Brake Fittings Assortment



This assortment of drain-cocks, shutoffs and air brake fittings for use with 1/4", 3/8", 1/2" copper tubing is a must for jobbers and fleet service shops. Provides excellent coverage for air brake tube and hose service requirements. The large plastic drawers and the illustrated labels for the 15 drawer cabinet included in assortment make positive part selection simple and quick.

CATALOG NUMBER	QTY.
1360x6	20
1360x8	20
1360x10	10
1360x12	10
1361x6	20
1361x8	5
1361x10	5
1362x4	5
1362x6	10
1362x8	5
1362x10	5
1368x6	10
1368x6x2	5
1368x6x6	5
1368x8	5
1368x10	5
1369x4x4	5
1369x6	10
1369x8	5
1380x6	5
1390x6	5
1391x6	5
145	10

CATALOG NUMBER	QTY.
33806-A	20
33806-B	5
33806B-Y06	2
33806B-Y24	5
33806B-Y28	5
33806B-Y34	5
33806B-Y38	5
6707	1
6708	1
6709	1
6747	1
6748	1
6749	1
FH-15X	1
FS-800	1
W05465	5
W14630	10
W15310	5
W76150	5
W79850	3
W79851	3

AB-28 • Air Brake Fittings Assortment



The 1/4", 3/8", 1/2" brass air brake fittings for use with copper tubing provide excellent coverage for fleets, independent repair shops and farm implement dealers doing service work.

With the AB-28 assortment you also receive a cabinet with clear plastic drawers plus illustrated, color-coded labels that assure fast, positive identification and selection of replacement fittings.

CATALOG NUMBER	QTY.
1360x4	20
1360x6	20
1360x8	20
1360x10	10
1360x12	10
1361x4	5
1361x6	20
1361x8	5
1361x10	5
1361x12	5
1362x6	5
1362x8	5
1362x10	5
1368x4	5
1368x6	10

CATALOG NUMBER	QTY.
1368x6x6	5
1368x8	5
1369x4	5
1369x6	10
145	10
33806-A	20
33806B-Y06	2
33806B-Y24	5
33806B-Y28	5
33806B-Y34	5
33806B-Y38	5
CL-16-2	1
FC-16X	1
W14630	10
W15310	5

Equipment

Assortments

SA-1 • Secondary Air Systems Kit



Ideal for fleet repair shops, truck dealers, garages and truck stops. SA-1 contains an assortment of popular 1/8" and 1/4" brass fittings plus 200' of Weatherhead NT100 SAE J844 Nylon tubing. The 1/8" fittings are Weatherhead SELFALIGN® and 1/4" fittings are Weatherhead 1400 series air brake. The sturdy box keeps the tubing and fittings together for quick and easy servicing of the tubing used on shifters, PTO's, wipers, horns, remote air, instrumentation, etc. All of the parts are organized at your finger tips. The SA-1 is a must for all vehicle air system maintenance facilities.

Size: 15" wide, 3-1/2" high, 14-1/2" deep.

SA-2 • Secondary Air Systems Kit



The SA-2 assortment enables you to supply fleets and dealers with fittings and tubing for 1/4" and 3/8" O.D. air brake applications. 1/8" O.D. tubing and fittings are also supplied for applications such as transmission shifter, air horn, gauge and flat adjustment. A cabinet is also supplied for easy storage on shelves and bench tops.

CATALOG NUMBER	QTY.
1460x4	10
1461x4	5
1462x4	2
1464x4	1
1468x4	2
1468x4x1	2
1468x4x4	2
1469x4	2
1469x4x4	2
1484x4	5
601x2	10

CATALOG NUMBER	QTY.
611x2	5
621x2	2
661x2	2
681x2	2
681x2x1	2
691x2	2
691x2x1	2
BF-40X	1
NT10002BK-100 100'	
NT10004BK-100 100'	

CATALOG NUMBER	QTY.
1460x4	10
1460x6	20
1461x4	5
1461x6	10
1462x4	5
1462x6	10
1464x4	2
1464x6	2
1466x6	5
1468x4	5
1468x4x4	5
1468x4x6	2
1472x4	5
1472x6	5
1472x6x6x6	5
1484x4	10
1484x6	10
1485x4	10
1485x6	10
1468x6	10

CATALOG NUMBER	QTY.
1468x6x2	5
1468x6x6	5
1468x6x8	5
1469x4	5
1469x4x4	5
1469x6	10
1469x6x6	5
601x2	10
611x2	10
621x2	5
661x2	5
681x2	5
681x2x1	2
691x2	5
691x2x1	2
BL-456-X	1
FS-SA-2	1
NT10002BK-100 100'	
NT10004BK-100 100'	
NT10006BK-100 100'	

Equipment

Field Attachable Assembly Equipment



Refer to safety information regarding Coll-O-Crimp hose, hose fittings and assembly equipment compatibility on page 4.

T-300 Field Attachable Hose End Assembly Machine



The Weatherhead T-300 Machine eliminates lost time and hard work when making replacement hose assemblies with bulk hose and field attachable hose ends. Simple, effortless operation provides uniform, safe assemblies time after time. This heavy-duty machine assembles straight, swivel, elbow and flange-type ends on all medium and high pressure wire braid hose from 3/16" through 2" I.D.

CATALOG NUMBER DESCRIPTION

T-300	Assembly Machine – complete with tripod stand, adjustable locator, chuck handle and foot switch
T-300X	Assembly Machine without tripod stand
T-301	Tripod Stand

Motor: Universal, reversible, 110-115 volts, 25-60 cycle, 1/2 H.P., 8 amps

Weight: 167 lbs.

Mandrel Assembly Tools



These tools are required for assembling 069 'D' Series hose ends in sizes 4 through 12 to prevent cutting the hose inner tube. Size 16 through 32 mandrels are used as a holding device when assembling 069 'D' Series swivel ends. Mandrels can be ordered individually or in sets as shown.

TH-8 Mandrel Set:

Contains 1 each of the mandrels listed plus

TH-8 BAG pocket roll bag for convenient storage.

HOSE I.D.	CATALOG NUMBER	SWIVEL END APPLICATION
3/16"	T-JS4	SAE 37° & 45°
1/4"	T-JS5	SAE 37° & 45°
5/16"	T-J6	SAE 37°
5/16"	T-S6	SAE 45°
13/32"	T-JS8	SAE 37° & 45°
1/2"	T-JS10	SAE 37° & 45°
5/8"	T-J12	SAE 37°
5/8"	T-S12	SAE 45°

TH-14 Mandrel Set:

Contains 1 each of the mandrels listed plus

TH-14 BAG zipper bag for convenient storage.

HOSE I.D.	CATALOG NUMBER	SWIVEL END APPLICATION
7/8"	T-J16	SAE 37°
1-1/8"	T-J20	SAE 37°
1-3/8"	T-J24	SAE 37°
1-13/16"	T-J32	SAE 37°

Equipment

Field Attachable Assembly Equipment

T-101A Barb-Tite End Assembly Tool



Assembly of Barb-Tite push-on hose ends is made easy with this handy tool. Easy and fast operation assures dependable, leak proof assemblies. Simply clamp hose in jaws, place hose end on push rod and pull the handle. Engineered for a lifetime of rugged service.

Weight: 1 lb.

Capacity: 1/4" to 1/2" I.D. hose only.

T-201 Barb-Tite End Assembly Tool



This bench-mounted tool is actually two tools in one. Not only does it assemble Barb-Tite hose ends, it is also a hose cutter. To cut your hose, simply retract the handle, place the hose in the cutter area and pull the handle. After cutting the hose to the desired length, place the hose under the cam handle locking it in place with the hose end aligned with the appropriate mark on the label. Place the barbed end of the fitting against the end of the hose and then pull the handle forward to complete the installation. The T-201 Assembly Tool is an easy-to-use tool that does everything you need to create a hose assembly.

Replacement Blade: T-201B

Note: This tool is designed to cut fiber-reinforced rubber hose only.

Capacity: 1/4" to 3/4" I.D. hose ONLY.



Refer to safety information regarding Coll-O-Crimp hose, hose fittings and assembly equipment compatibility on page 4.

APPLICATION DATA

LOW & MEDIUM PRESSURE HOSE

HIGH PRESSURE HOSE


SPECIALTY HOSE

ACCESSORIES & ASSEMBLY INSTRUCTIONS

ADAPTERS & TUBE HOSE ENDS

HOSE ASSEMBLY EQUIPMENT

TECHNICAL DATA

 Refer to safety information regarding Coll-O-Crimp hose, hose fittings and assembly equipment compatibility on page 4.

Equipment

Hose Cutting Equipment

T-60A Portable Cutter



An excellent heavy-duty cutting machine. The T-60A is a portable power saw that can cut all hoses, including wire-reinforced. Includes three abrasive blades.

Replacement Blade:
T-1060A 14" diameter

Motor:
3-1/2 H.P., 110/115 volts

Amps: 15

Weight: 45 lbs.

RPM: 3500

Note:

3 blades are mounted on shaft for shipping purposes. Remove prior to use.

T-10B Hose Cutting Machine



The T-10B hose cutting machine assures quick, clean, right angle cuts, eliminating ragged and frayed cut ends which make hose assembly difficult and are a possible cause of premature hose failure. A powerful 1 H.P. motor and belt-driven blade cut all low, medium and high pressure fabric and wire-braided hose from 3/16" through 1-1/4" I.D. 2 wire hose. Specifically designed for cutting hose, the T-10B is a natural companion to the T-400-1 Coll-O-Crimp and T-300 hose assembly machines.

Ordering Options:

T-10B= saw with smooth edge blade for cutting up to 1-1/4" 1-wire hose

T-10B-1= saw with scalloped edge blade for cutting up to 1-1/4" 2-wire hose.

Replacement Blades:

T-1047 (Smooth)

T-1047-1 (Scalloped)

Replacement Belt for T-10B & T-10C:

T-10-V1 Belt

Motor:

1 H.P., 3450 RPM, 115, 60 cycle, single phase

Size: 13" wide, 24" long, 17" high

Weight:

85 lbs.

Amps Drawn:

115 volts – 15

Replacement Parts:

T-10-D Hose/Dowel

T-10-H Handle

T-10-P Pusher

APPLICATION
DATA

LOW & MEDIUM
PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY
HOSE

ACCESSORIES &
ASSEMBLY INSTRUCTIONS

ADAPTERS &
HOSE ENDS

HOSE ASSEMBLY
EQUIPMENT

TECHNICAL DATA

Equipment

Hose Cutting Equipment

! Refer to safety information regarding Coll-O-Crimp hose, hose fittings and assembly equipment compatibility on page 4.

T-9-1 & T-9-3 Hose Cutting Machine



The T-9-1 and T-9-3 provide the capability for cutting multi-spiral and braided wire-reinforced hose through 2" I.D. This machine is a perfect companion for the ET4000 press. Includes scalloped blade.

Note: The T-9-1 and T-9-3 are shipped less a line cord and plug. An electrician is recommended for direct electrical hook-up.

T-9-1:

Motor: 3 H.P., 230 volts, 60 cycle, single phase

Size: 24" wide, 24" deep, 24" high

Weight: Approx. 255 lbs.

Amps Drawn: At 230 volts – 17

T-9-3:

Motor: 3 H.P., 230 volts, 60 cycle, 3 phase

Size and Weight: Same as T-9-1

Amps Drawn: At 230 volts – 8

Replacement Blade:


T-75-14 Scalloped

T-75-17 Carborundum

T-75-11 Smooth

Guard: T-9-G

T-70 Hose Cutting Machine



This cutting machine easily handles all one and two braided wire hose through 4" I.D., up to 2" I.D. 4-spiral and up to 1-1/2" I.D. 6 multi-spiral reinforced hose. That makes this machine ideal for cutting most hydraulic and pneumatic hoses as well as a variety of industrial fluid transfer hoses. The T-70 uses a 14" cutting blade for cutting all 1 & 2 wire braid and through 2" 4 spiral hose. The scalloped toothed blade is for cutting

industrial transfer hoses through 4" and the smooth beveled blade for cutting hose with a wire braid cover. T-70 includes a scalloped blade.

Replacement Blade:

T-1070 Steel Scalloped

T-1071 Steel Scalloped Toothed

T-1072 Steel Smooth Beveled

Motor: 4.2 H.P., 110/115 volts, single phase


Size: 22" wide, 19" deep, 25" high

Weight: Approx. 65 lbs.
Amps Drawn: 115 volts – 20

Hose Cutting and Skiving Wheels



CATALOG NUMBER	TYPE	BLADE DIA.	HOLE DIA.	MACHINE USED ON
Cutting Wheels				
T-1042	Carborundum	8"	5/8"	T-10A
T-1047	Steel Smooth	7"	5/8"	T-10B & T-10C
T-1047-1	Steel Scalloped	7"	5/8"	T-10B & T-10C
T-1060	Carborundum	12"	1"	T-60
T-1060A	Carborundum	14"	1"	T-60A
T-1070	Steel Scalloped	14"	1"	T-70
T-1071	Steel Scalloped Toothed	14"	1"	T-70
T-1072	Steel Smooth Beveled	14"	1"	T-70
T-75-11	Steel Smooth	10"	3/4"	T-9/T-75
T-75-14	Steel Scalloped	10"	3/4"	T-9/T-75
T-75-17	Carborundum	10"	3/4"	T-9/T-75
Skiving Wheels				
T-75-12	Wire	8"	1"	T-75
Belts				
T-76-B	Reinforced	1"		Old T-76/T-76-1

 Refer to safety information regarding Coll-O-Crimp hose, hose fittings and assembly equipment compatibility on page 4.

Equipment

Hose Cutting Equipment

T-1037 Knife



An inexpensive, reliable knife useful in splitting twin-line and multiple-line hoses quickly and easily.

Replacement Blade:
T-1037B
Replacement Handle:
T-1037H

T-135 Plastic Tube and Hose Cutter



An economical alternative to quality tube and hose cutting. This versatile tool is lightweight and durable for long service life.

Replacement Blade:
T-135B
Capacity:
Up to 1" hose I.D.
Note:
Not for use with wire-reinforced hose.

T-138 Hose and Tube Cutter



One hand operation for quick, clean cuts through plastic or nylon compound tubing and solid or fiber-reinforced hose up to 1-1/2" O.D.

- Any wireless hose or tubing.
- Power steering hose (H324)
- Air Conditioning hose (H757)
- Air brake hose (H338)
- Air system nylon tubing (NT100)
- Thermoplastic hose (H435, H436, H335, and H336)
- Low pressure plastic tubing (PT200, PT230, PT240)

Replacement Blade:
T-138B
Note:
Not for use with wire-reinforced hose.

T-191 Plastic Tube and Hose Cutter



A tool designed to be small, only 2-7/8" long. The versatile T-191 offers quick and clean square cuts on 1/16" to 1/2" O.D. plastic tubing and non-wire reinforced hose. The T-191 can be either bench or wall mounted and offers the safety of closing automatically when not in use.

Spare Parts: T-191B
Replacement Blade
(one per package)

Equipment

Presetting Tools

T-570-1 Ermeto-Quick Set™ Preset Machine




The Ermeto-Quick Set Machine is ideal for bulk assemblies. It has a positive-stop action, which guarantees uniform repeatability, and a hand pump operation which yields quick cycle time, reducing assembly time. The T-570 is an easy tool to use that will save you time and money.

Ermeto Hand Presetting Tools 7000 Series



Presetting tools provide a more accurate and positive leak-proof method of coupling flareless fittings. Presetting steel Ermeto sleeves on tubing prior to fitting assembly will permit the maximum high performance obtainable with flareless fittings. Due to possible thread galling, the use of presetting tools is required when assembling stainless steel fittings.

Metric Flareless Hand Presetting Tools



Presetting tools provide a more accurate and positive leak-proof method of coupling flareless fittings. Presetting the steel metric sleeves prior to fitting assembly will permit the maximum high performance obtainable with flareless fittings. These tools are available for both the Light (DIN 3901/3902L) and Heavy (DIN 3901/3902S) flareless series.

T-570 Package includes:

PART NUMBER	DESCRIPTION
T-460-2	Hand Pump (10,000 PSI)
T-450-3	Quick Disconnect Hose Assembly
T-570-1	Ermeto Preset Machine
T-570-4	Preset Die
T-570-6	Preset Die
T-570-8	Preset Die
T-570-12	Preset Die
T-570-16	Preset Die
T-571-4	Tube Support
T-571-6	Tube Support
T-571-8	Tube Support
T-571-12	Tube Support
T-571-16	Tube Support

-20, -24, and -32 sizes also available.

CATALOG NUMBER	TUBE O.D. (INCHES)	THREAD SIZE
T-7002	1/8	5/16-24
T-7003	3/16	3/8-24
T-7004	1/4	7/16-20
T-7005	5/16	1/2-20
T-7006	3/8	9/16-18
T-7008	1/2	3/4-16
T-7010	5/8	7/8-14
T-7012	3/4	1 1/16-12
T-7016	1	1 5/16-12
T-7020	1-1/4	1 5/8-12
T-7024	1-1/2	1 7/8-12
T-7032	2	2 1/2-12

Light Series 3901/3902L

CATALOG NUMBER	TUBE O.D. (MM)	THREAD SIZE
TL-7008	8	M14x1.5
TL-7010	10	M16x1.5
TL-7012	12	M18x1.5
TL-7015	15	M22x1.5
TL-7018	18	M26x1.5
TL-7022	22	M30x2.0
TL-7028	28	M36x2.0

Heavy Series 3901/3902S

CATALOG NUMBER	TUBE O.D. (MM)	THREAD SIZE
TH-7008	8	M16x1.5
TH-7010	10	M18x1.5
TH-7012	12	M20x1.5
TH-7014	14	M22x1.5
TH-7016	16	M24x1.5
TH-7020	20	M30x2.0
TH-7025	25	M36x2.0
TH-7030	30	M42x2.0



Equipment

Counterbore and Brazing Tools

SAE Straight O-Ring Boss Tapping and Counterboring Tools

These Eaton precision counterborer and tap tools are available in the full range of sizes. They provide the correct SAE contour

and UNF-2B threads for proper containment of straight-thread o-ring fittings.



THREAD TAP CATALOG NO.	UNF-2B THREAD SIZE OF THREAD TAP	DRILL SIZE	FOR FITTING SIZE	FOR TUBE O.D.	COUNTER-BORER CATALOG NO.
T-5002	5/16-24	I	2	1/8	T-5102
T-5003	3/8-24	0	3	3/16	T-5103
T-5004	7/16-20	W	4	1/4	T-5104
T-5005	1/2-20	29/64	5	5/16	T-5105
T-5006	9/16-18	1/2	6	3/8	T-5106
T-5008	3/4-16	11/16	8	1/2	T-5108
T-5010	7/8-14	51/64	10	5/8	T-5110
T-5012	1 1/16-12	31/32	12	3/4	T-5112
T-5014	1 3/16-12	1 3/32	14	7/8	T-5114
T-5016	1 5/16-12	1 7/32	16	1	T-5116
T-5020	1 5/8-12	1 17/32	20	1 1/4	T-5120
T-5024	1 7/8-12	1 25/32	24	1 1/2	T-5124
T-5032	2 1/2-12	2 27/64	32	2	*T-5132*

*Special order only.

APPLICATION
DATA

LOW & MEDIUM
PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY
HOSE

ACCESSORIES &
ASSEMBLY INSTRUCTIONS

ADAPTERS &
HOSE ENDS

HOSE ASSEMBLY
EQUIPMENT

TECHNICAL DATA

Equipment

Hose Bore Cleaning Brushes

Individual Brushes



HOSE I.D. (INCH)	CATALOG NUMBER	BRISTLE O.D. (INCH)	BRISTLE LENGTH (INCH)	OVERALL LENGTH (INCH)
3/16-3/8	T-1106	3/8	2	24
1/2-5/8	T-1110	1/2	3	24
3/4-1	T-1116	1	4	24
1-1/8-1-1/2	T-1124	1-1/2	4	24
2-3	T-1132	2	5	24

T-1100 3-Piece Kit



Includes one of each of the following:

HOSE I.D. (INCH)	CATALOG NUMBER	BRISTLE O.D. (INCH)	BRISTLE LENGTH (INCH)	OVERALL LENGTH (INCH)
3/16-3/8	T-1106	3/8	2	24
1/2-5/8	T-1110	1/2	3	24
3/4-1	T-1116	1	4	24

APPLICATION
DATA

LOW & MEDIUM
PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY HOSE

ACCESSORIES &
ASSEMBLY INSTRUCTIONS

ADAPTERS & TUBE
HOSE ENDS

HOSE ASSEMBLY
EQUIPMENT

TECHNICAL DATA

Equipment

Skiving Tools and Wrenches

Hand Skiving Tool

(For H470 Hose)



Order hand skiving tool components by the individual catalog numbers listed below.

See page 23 for skiving instructions.

T-410-36: Handle

T-410-37: Replacement Cutting Blades

HOSE SIZE	SKIVING TOOL CUTTING HEAD H470
1/2" I.D.	T-410-50
3/4" I.D.	T-410-52
1" I.D.	T-410-53
1-1/4" I.D.	T-410-54
1-1/2" I.D.	T-410-55
2" I.D.	T-410-56

Rapid Wrenches



The Rapid Wrench is a heavy-duty, high quality wrench that ratchets for quick installation and removal of tube fittings and hose ends. These wrenches have jaws that snap open and close completely around the fitting giving 6-point contact. Needing only 30° of rotation to ratchet, they allow easy access to tight locations. Available individually or in a set with pouch, these wrenches are a welcome addition to any tool box.

T-139: 7-Piece Set with Pouch – 1/2" through 7/8"

T-139P: Pouch for 7-Piece Set

T-152: 11-Piece Set with Pouch

T-152P: Pouch for 11-Piece Set

CATALOG NUMBER	WRENCH HEX SIZE
T-140	3/8"
T-141	7/16"
T-142	1/2"
T-143	9/16"
T-144	5/8"
T-145	11/16"
T-146	3/4"
T-147	13/16"
T-148	7/8"
T-151	15/16"
T-149	1"

APPLICATION DATA

LOW & MEDIUM PRESSURE HOSE

HIGH PRESSURE HOSE

SPECIALTY HOSE

ACCESSORIES & ASSEMBLY INSTRUCTIONS

ADAPTERS & HOSE ENDS

HOSE ASSEMBLY EQUIPMENT

TECHNICAL DATA

Equipment

Power Steering Make-Up Information

H32406 Passenger Car Power Steering Hose



The Coll-O-Crimp System may be used to supplement the original equipment-type power steering hose assembly inventory by using hose ends listed below and tubing (from the old hose assembly) to duplicate out-of-stock or slow moving hose assemblies.

Reinforcement:

2 Fiber Braids

Cubical Expansion:

8 to 17 cc ft. @ 1300 PSI

Temp. Range:



-40°F to +250°F

SAE J188 Type 2


HOSE I.D.	HOSE O.D.	CATALOG NUMBER	RECOM. OPER. PRESS.	MIN. BURST PRESS.	BEND RADII
3/8	13/16	H32406	1500	6000	3-1/8

All dimensions in inches; pressure in PSI.

On many of the late model cars the formed tubing from the old line with its complicated bends can be utilized to make up a new assembly. Just use a tube cutter to cut the old tube as close to the hose as possible, then make up a hose assembly with a flareless tube end (i.e., 06U-756) and attach to the old tubing. Reference flareless tube assembly instructions on page 315-316.

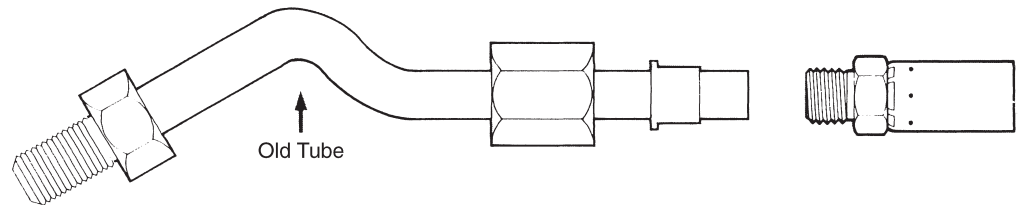


42x6
SAE 45° Flare Union



252x6, 252x7
Inverted Flare to Female Pipe



1439, 1440, 41157x6
O-Ring Port to JIC 37° Flare
M41157x6x14, M41157x6x16, M41157x6x18
Metric O-Ring Port to JIC 37° Flare



1444, 1445, 1446, 1447
O-Ring Port to Female Inverted Flare



1553, 1554, 1563
Inverted Flare to SAE 45° Flare

Equipment

Power Steering Make-Up Information

APPLICATION DATA

LOW & MEDIUM PRESSURE HOSE

HIGH PRESSURE HOSE


SPECIALTY HOSE

ACCESSORIES & ASSEMBLY INSTRUCTIONS

ADAPTERS & HOSE ENDS

HOSE ASSEMBLY EQUIPMENT


TECHNICAL DATA



Original End

1/4" SAE Swivel 7/16-20


CONFIGURATION	USE CATALOG NO.
Straight	06U-604
45° Elbow	06U-684
90° Elbow (Short)	06U-664
90° Elbow (Long)	06U-644
Reuse old tube	06U-754



Original End

5/16" SAE Swivel 1/2-20


CONFIGURATION	USE CATALOG NO.
Reuse old tube	06U-755



Original End

3/8" SAE Swivel 5/8-18


CONFIGURATION	USE CATALOG NO.
Straight	06U-406
45° Elbow	06U-486
90° Elbow	06U-446
Reuse old tube	06U-756



Original End

3/8" SAE 45° Rigid 5/8-18


CONFIGURATION	USE CATALOG NO.
Straight	06U-406 with 42x6
45° Elbow	06U-486 with 42x6
90° Elbow	06U-446 with 42x6
Reuse old tube	06U-756



Original End

1/4" Inv. Swivel 7/16-24


CONFIGURATION	USE CATALOG NO.
Straight	06U-B04
45° Elbow	06U-B44
90° Elbow	06U-B64
Reuse old tube	06U-754



Original End

5/16" Inv. Swivel 1/2-20


CONFIGURATION	USE CATALOG NO.
Straight	06U-B05 or 06U-406 with 1553
45° Elbow	06U-B45 or 06U-486 with 1553
90° Elbow	06U-B65 or 06U-446 with 1553
Reuse old tube	06U-755



Original End

3/8" Inv. Swivel 5/8-18


CONFIGURATION	USE CATALOG NO.
Straight	06U-B06 or 06U-406 with 1563
45° Elbow	06U-B46 or 06U-486 with 1563
90° Elbow	06U-B66 or 06U-446 with 1563
Reuse old tube	06U-756



Original End

1/4" Inv. Swivel 7/16-24

CONFIGURATION	USE CATALOG NO.
Straight	06U-B04
45° Elbow	06U-B44
90° Elbow	06U-B64
Reuse old tube	06U-754



Original End

7/16" Inv. Swivel with 3/89 Tube Opening 11/16-18

CONFIGURATION	USE CATALOG NO.
Straight	06U-B07 or 06U-406 with 1554
45° Elbow	06U-B47 or 06U-486 with 1554
90° Elbow	06U-B67 or 06U-446 with 1554
Reuse old tube	06U-756
New tubing/nut	105x6x7



Original End

3/8" Inv. Seat 5/8-18


CONFIGURATION	USE CATALOG NO.
Straight	06U-104 with 252x6



Original End

7/16" Inv. Seat 11/16-18

CONFIGURATION	USE CATALOG NO.
Straight	06U-104 with 252x7




Original End O-Ring Tube End

3/8" Tube - 5/8-18

CONFIGURATION	USE CATALOG NO.
Straight	06U-606 with 41157x6
45° Elbow	06U-686 with 41157x6
90° Elbow	06U-666 with 41157x6
Reuse old tube	06U-756

Equipment


Power Steering Make-Up Information



Original End

O-Ring Tube End (Chrysler)
5/16" Swivel 1/2-20


CONFIGURATION NO.	USE CATALOG
Reuse old tube	06U-755



Original End

O-Ring Tube End (Ford) 1/4"
Tube -9/16-18 (Special)


CONFIGURATION NO.	USE CATALOG
Straight	06U-604 with 1440
45° Elbow	06U-684 with 1440
90° Elbow	06U-664 with 1440
Reuse old tube	06U-755



Original End

O-Ring Tube End 3/8" Tube
- 5/8-18 (Special)


CONFIGURATION NO.	USE CATALOG
Straight	06U-606 with 1439
45° Elbow	06U-686 with 1439
90° Elbow	06U-666 with 1439
Reuse old tube	06U-756



Original End

O-Ring Tube End (Ford)
7/16" Tube -11/16-18
(Special)


CONFIGURATION NO.	USE CATALOG
Straight	06U-B06 with 1444
45° Elbow	06U-B46 with 1444
90° Elbow	06U-B66 with 1444
Reuse old tube	06U-756



Original End

O-Ring Tube End 3/8" Tube
- M14x1.5


CONFIGURATION NO.	USE CATALOG
Straight	06U-B06 with 1445
45° Elbow	06U-B46 with 1445
90° Elbow	06U-B66 with 1445
Reuse old tube	06U-756



Original End

O-Ring Tube End 3/8" Tube
- M16x1.5

CONFIGURATION NO.	USE CATALOG
Straight	06U-B06 with 1446
45° Elbow	06U-B46 with 1446
90° Elbow	06U-B66 with 1446
Reuse old tube	06U-756



Original End

O-Ring Tube End 3/8" Tube
- M18x1.5

CONFIGURATION NO.	USE CATALOG
Straight	06U-B06 with 1447
45° Elbow	06U-B46 with 1447
90° Elbow	06U-B66 with 1447
Reuse old tube	06U-756